


AR Data Analysis


Generated: 5/22/2026, 8:19:48 PM

Artifacts: 4305


Device Model




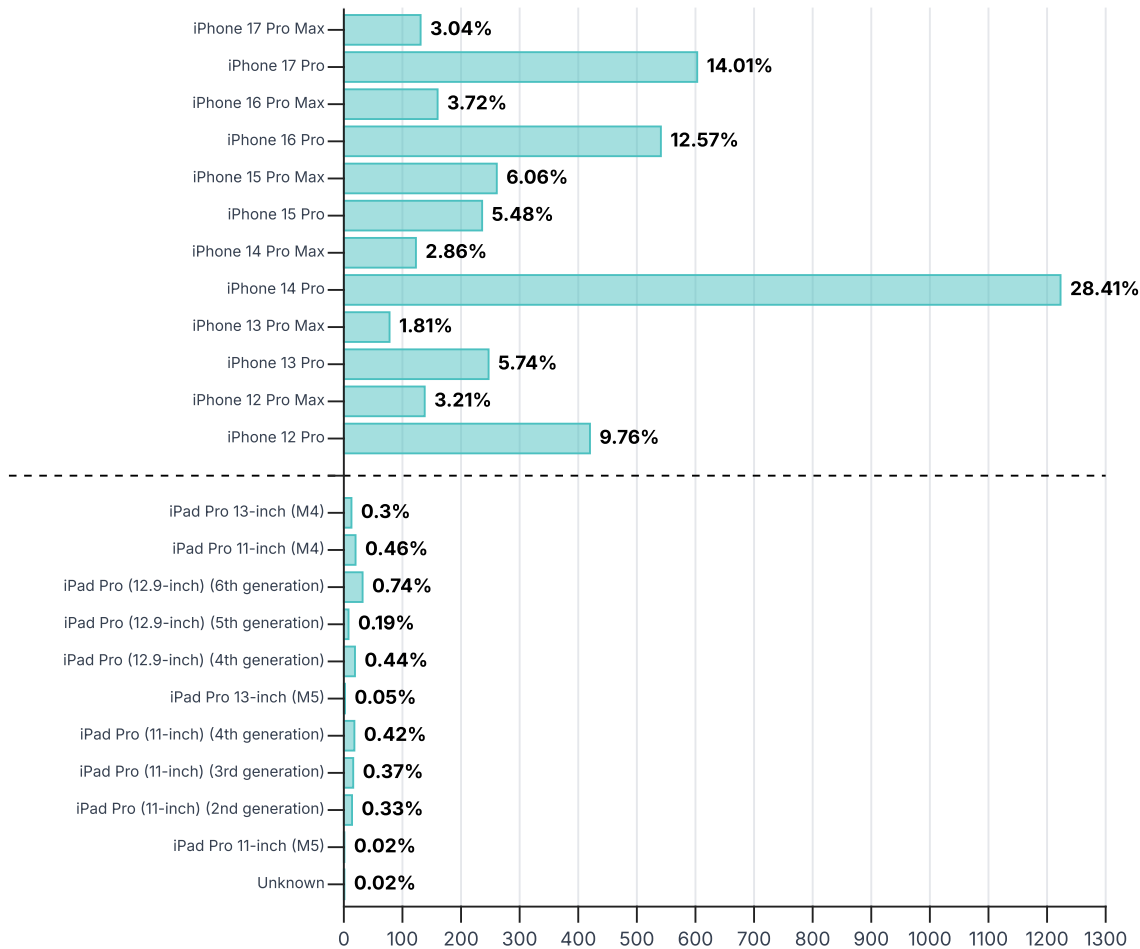


Focal Length

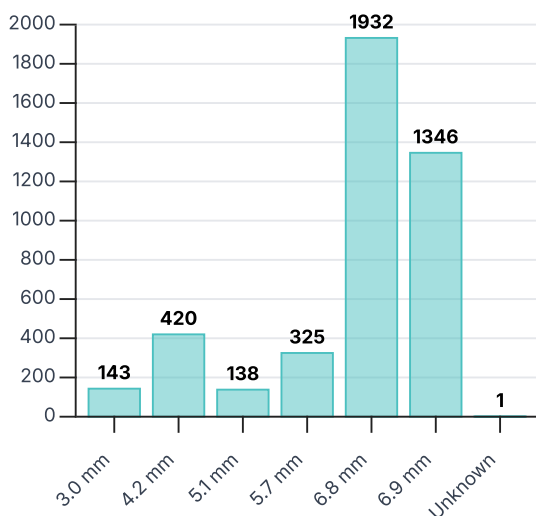


Max Aperture

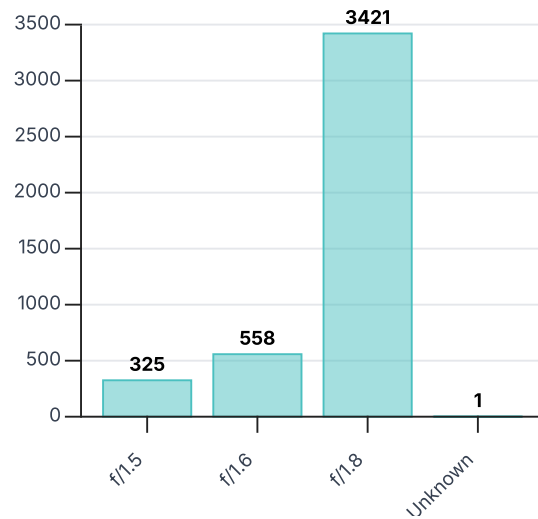


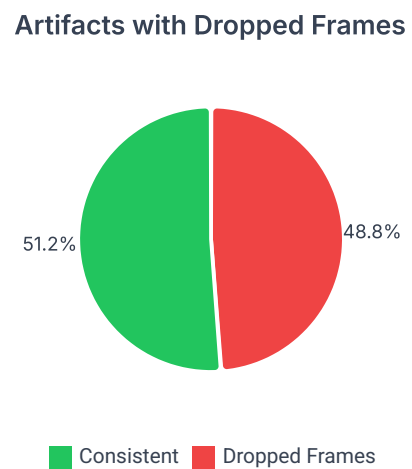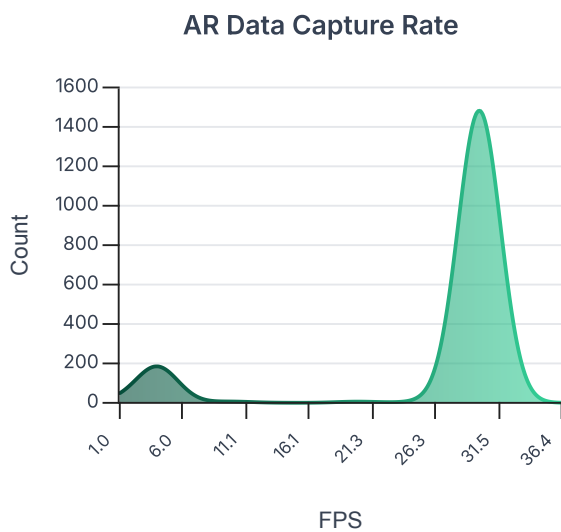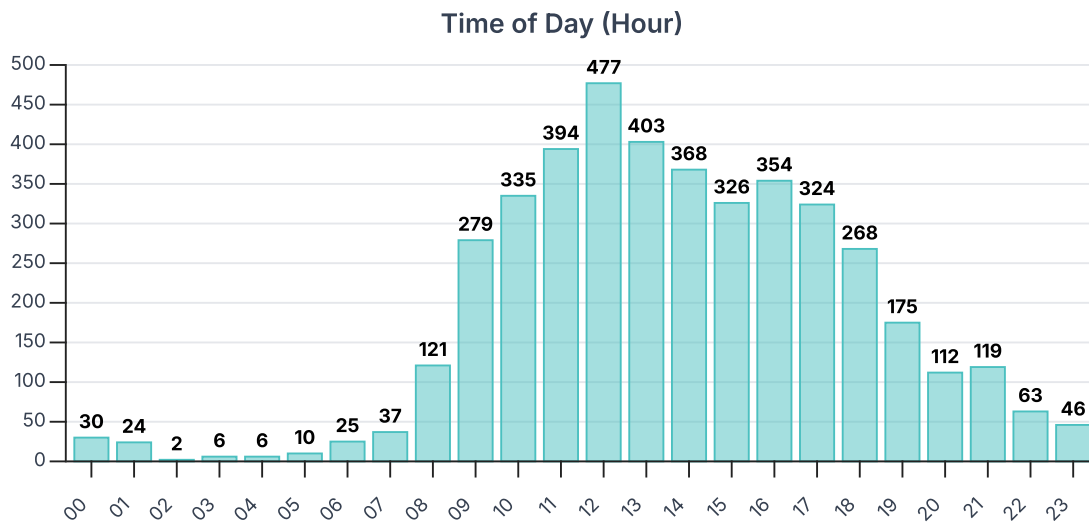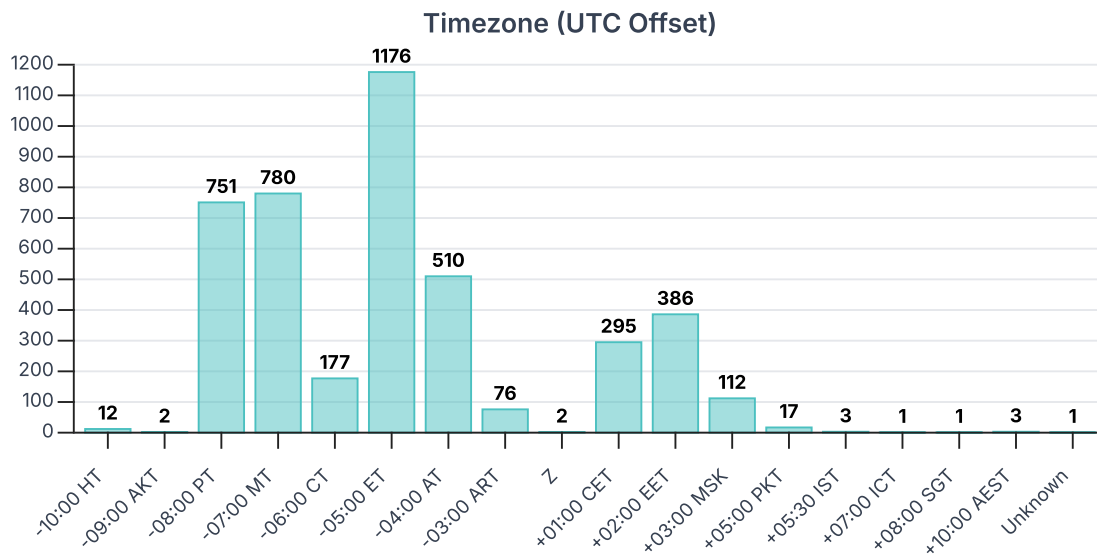


Artifacts with Dropped Frames Over Time

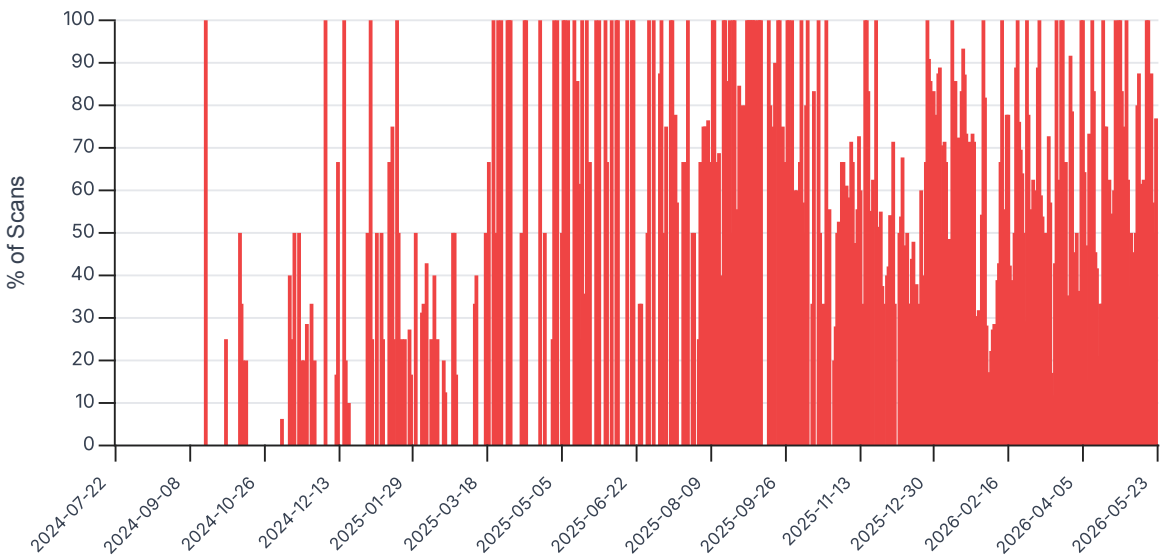


Average Dropped Frame Percentage Over Time

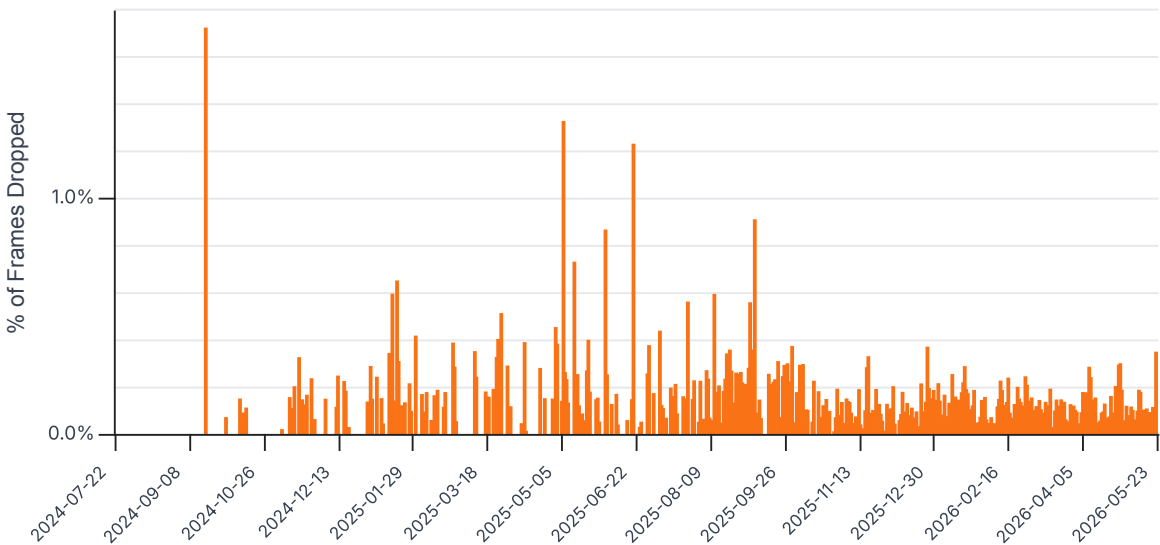



Scan Efficiency

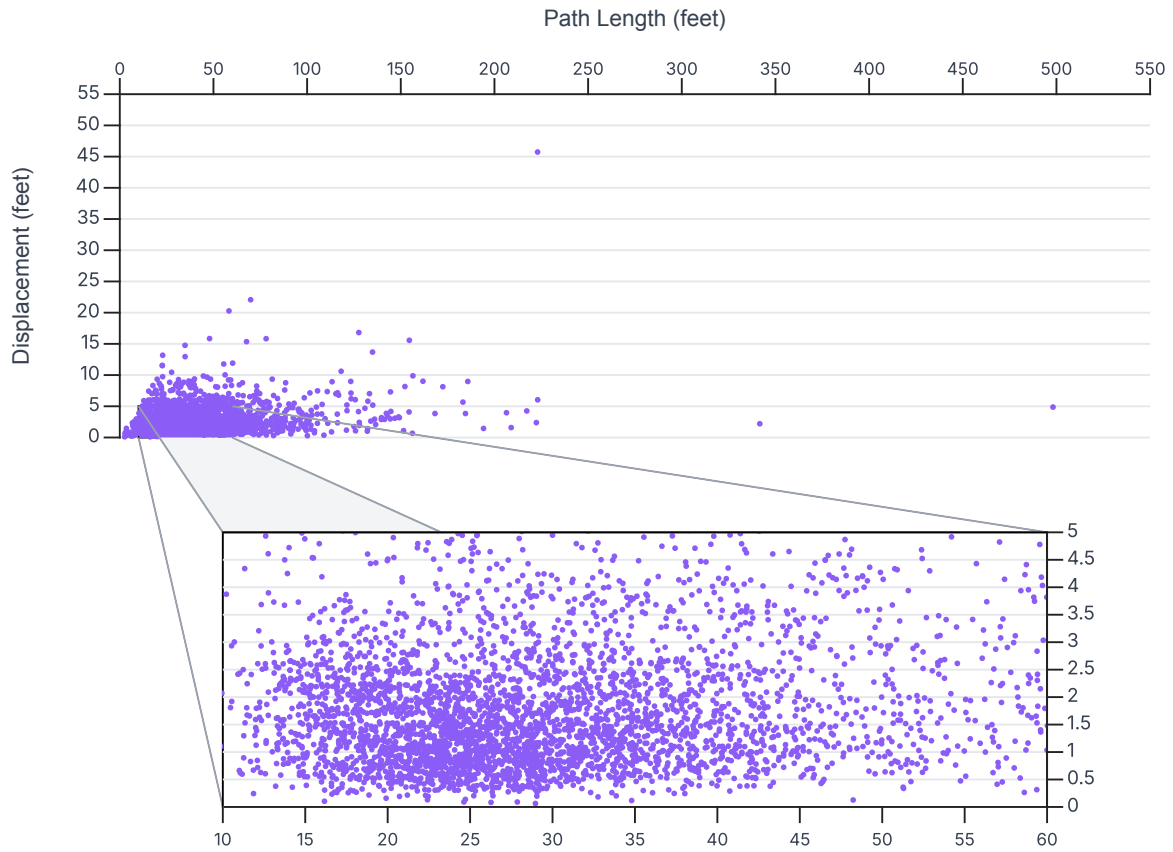


Movement Speed

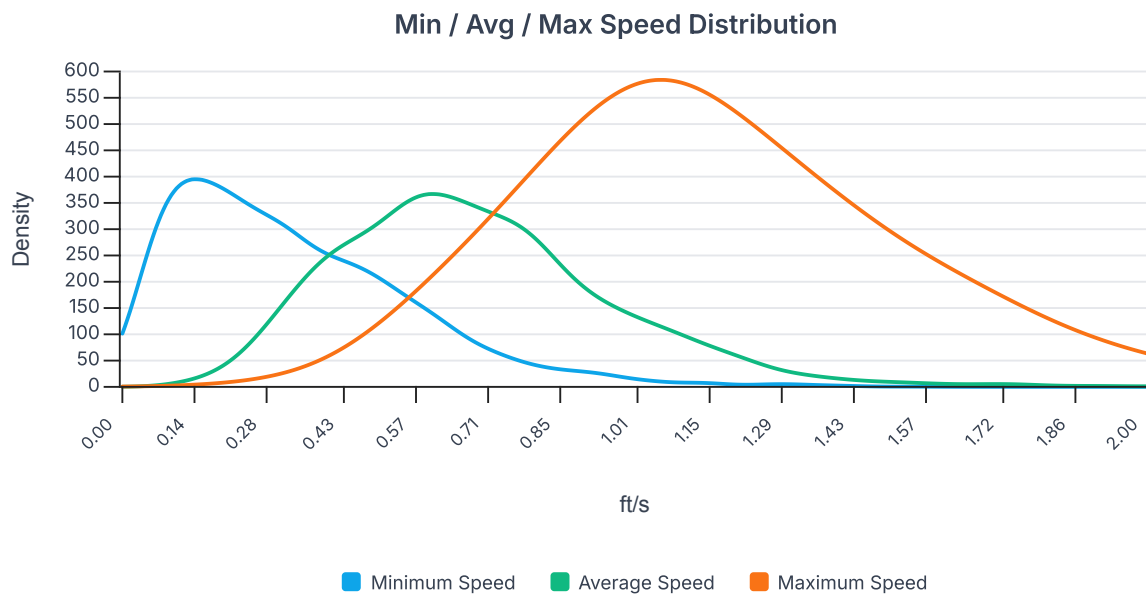


Phone Tilt Profile

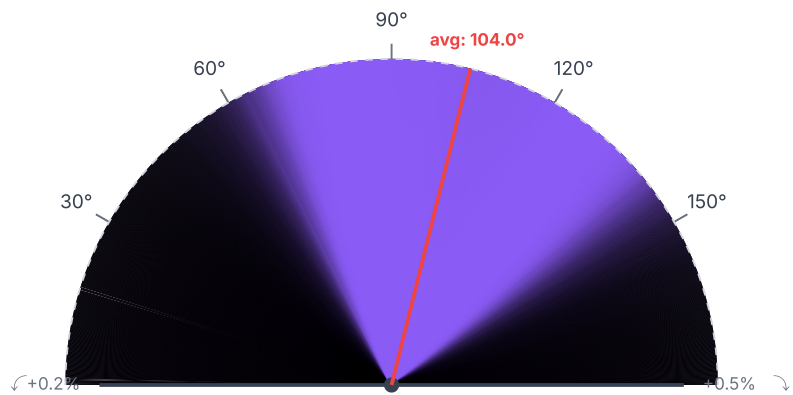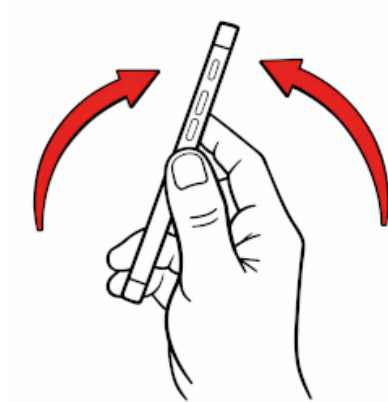


Scans with Fast Tilts (>5 °/s)

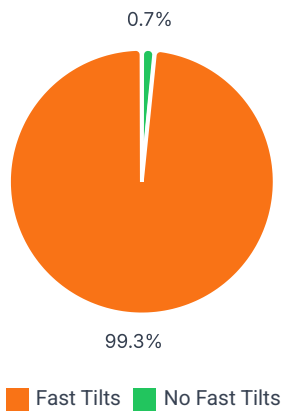


Maximum Tilt Speed

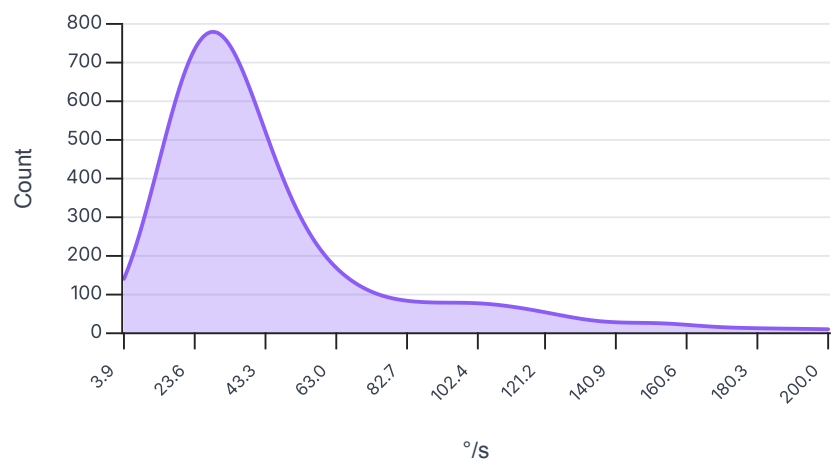


Fast Tilt Timing During Scan

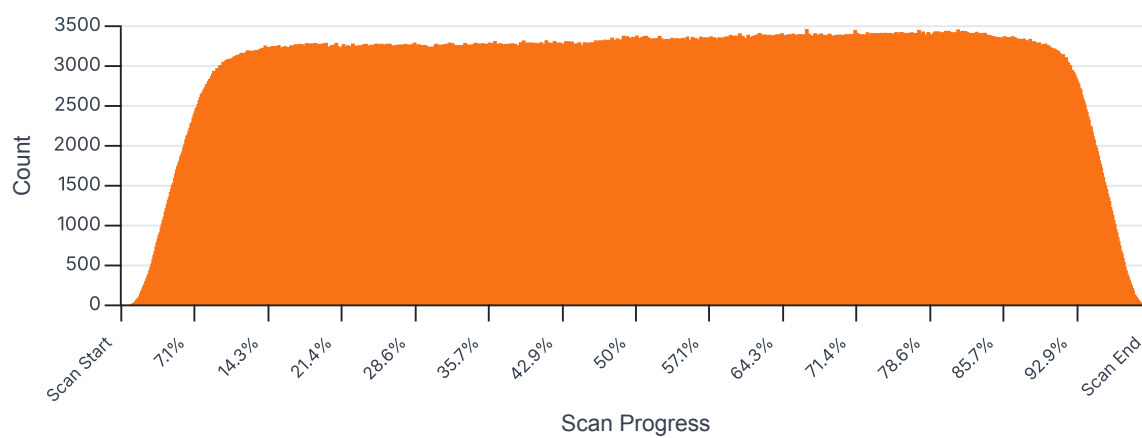


Phone Roll Profile

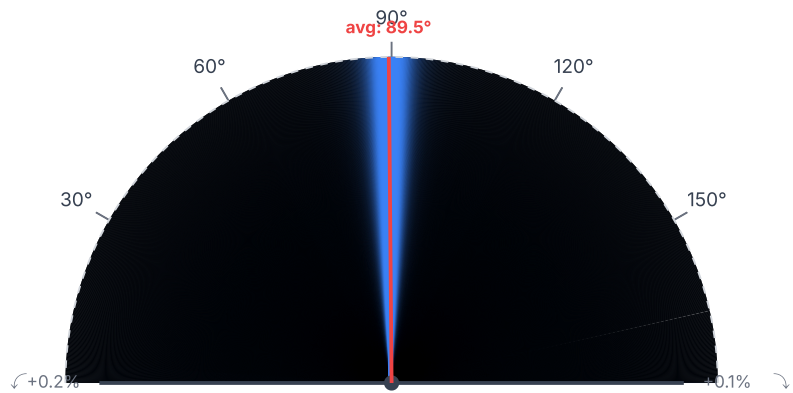


Scans with Fast Rolls (>5 °/s)

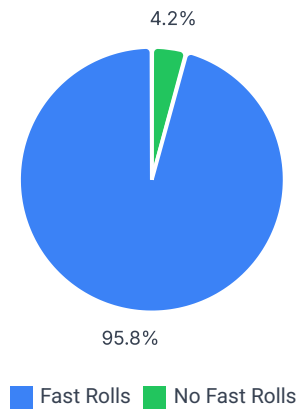



Maximum Roll Speed

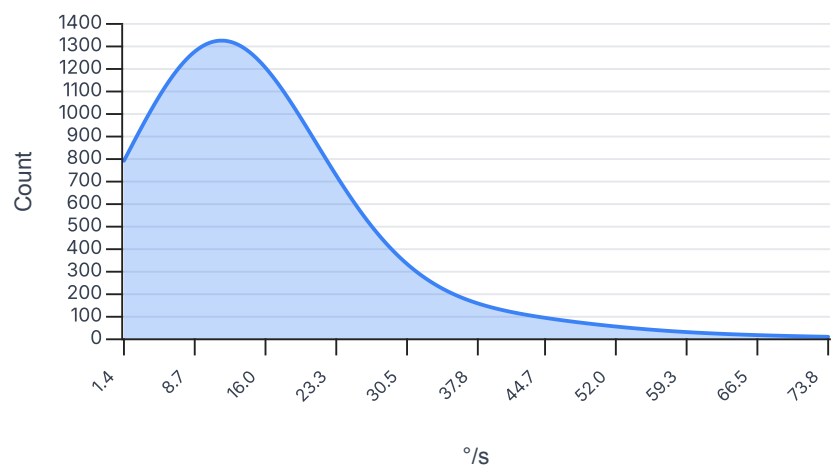


Fast Roll Timing During Scan

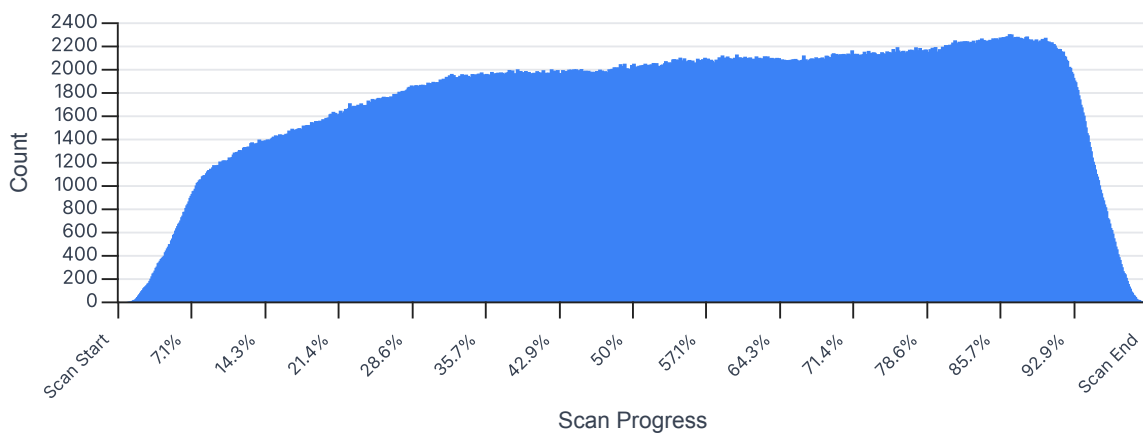


Phone Pan Profile

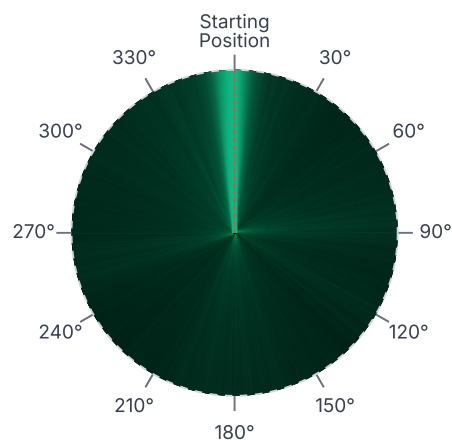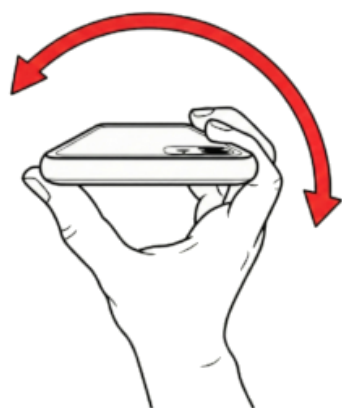


Scans with Fast Pans (>5 °/s)

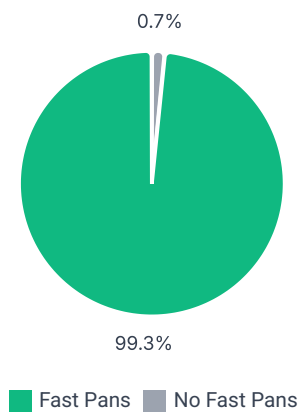


Maximum Pan Speed

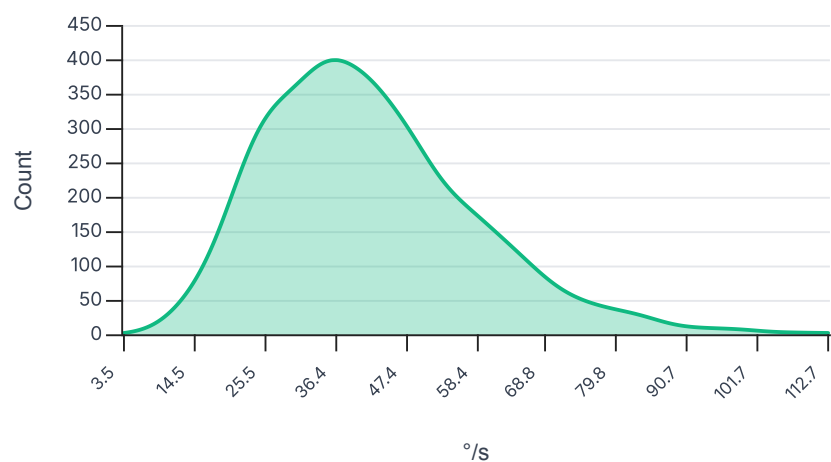


Fast Pan Timing During Scan

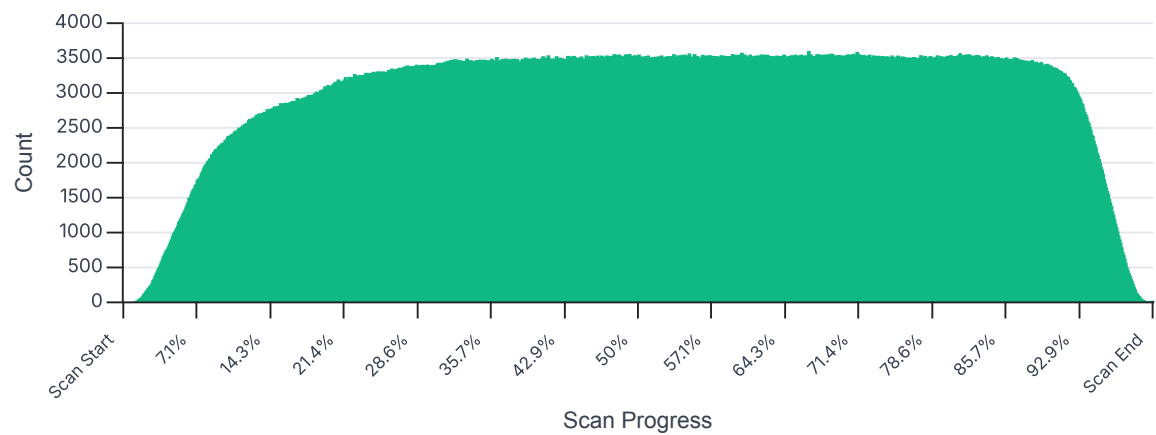

Scans with Full 360° Rotation

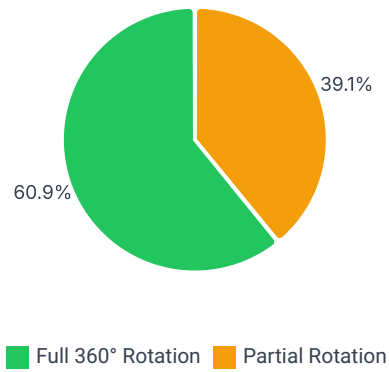


Partial Rotation Coverage

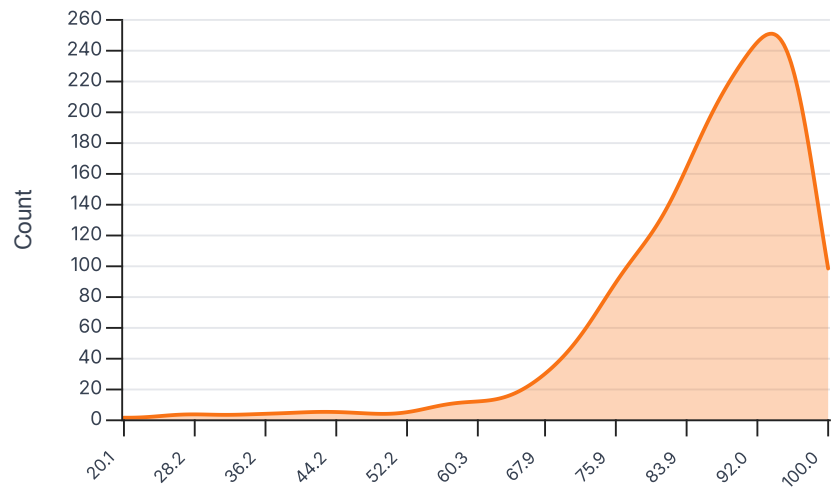


Spherical Coverage

Spherical Coverage (multi-view)

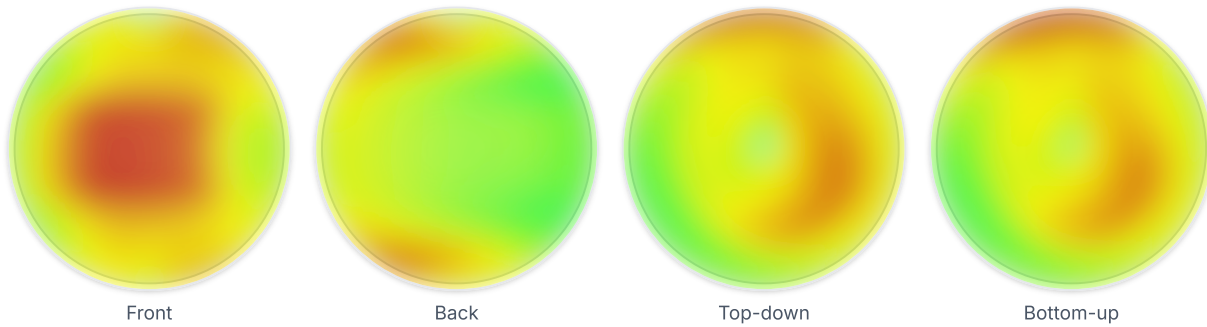




Stats Avg Coverage: 88.8% of sphere Max dwell in bin: 10.72 s Avg dwell per bin: 5.579 s

Aggregated Spherical Coverage (6 ft radius; 2.5° resolution)

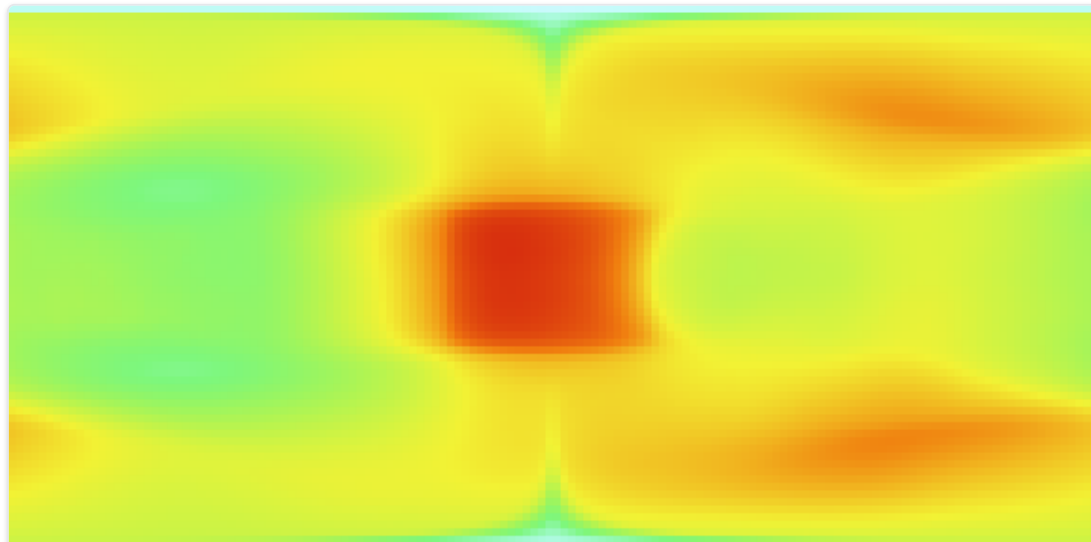




Less time  More time

Ambient Intensity

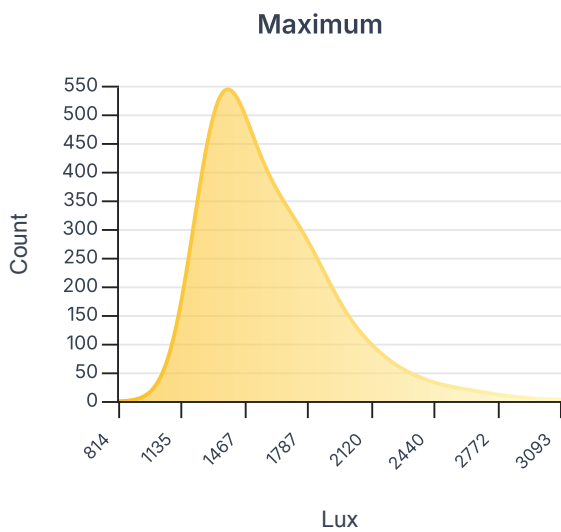
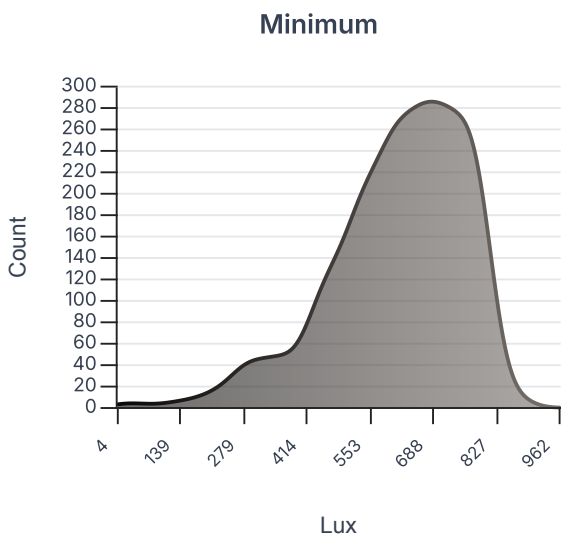
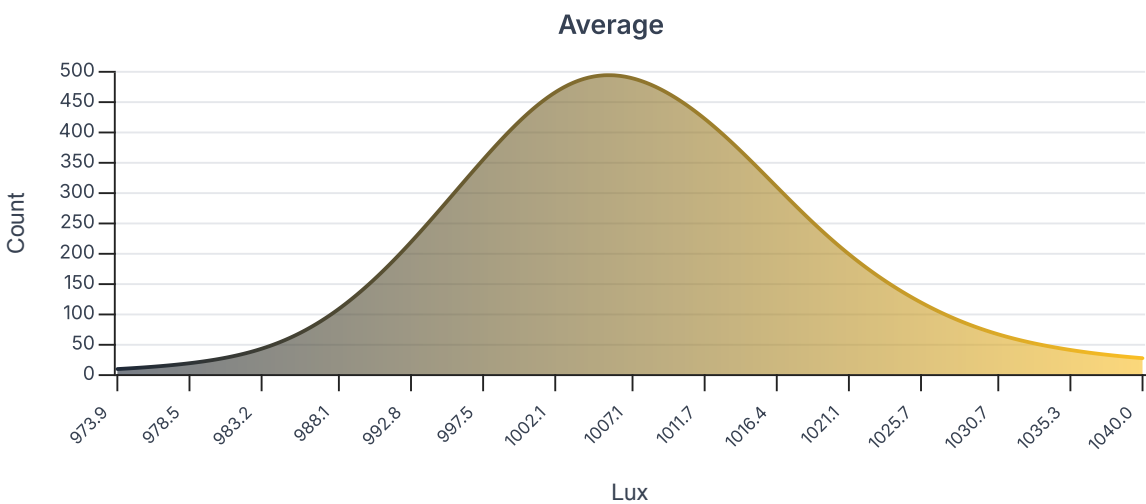


Color Temperature

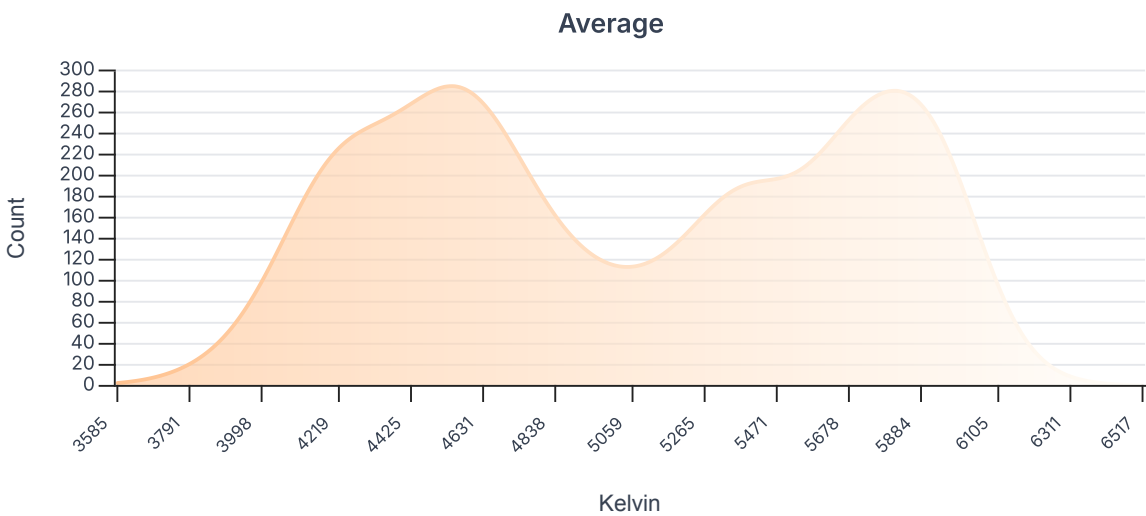

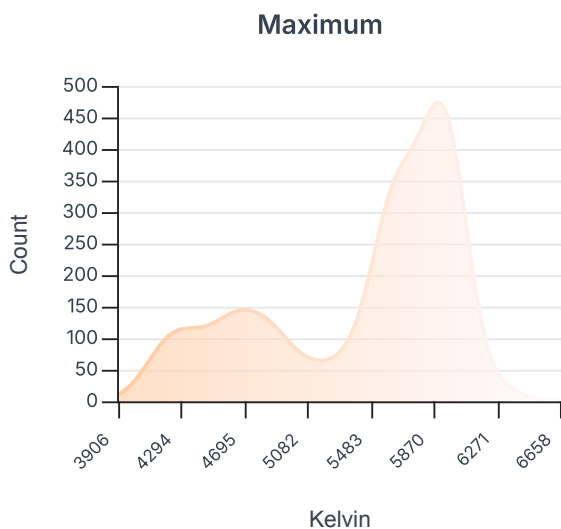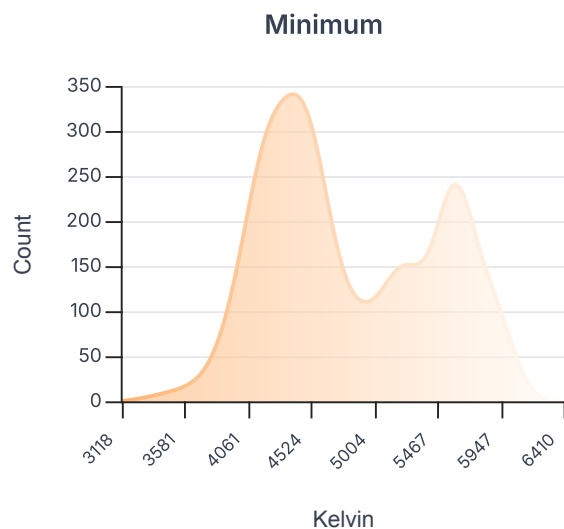

ISO Speed

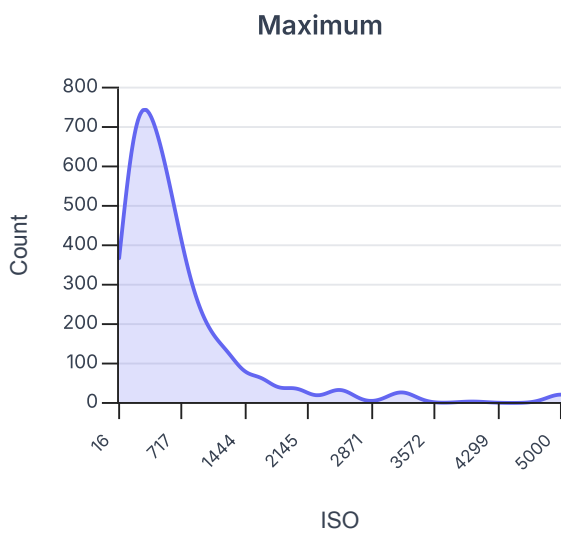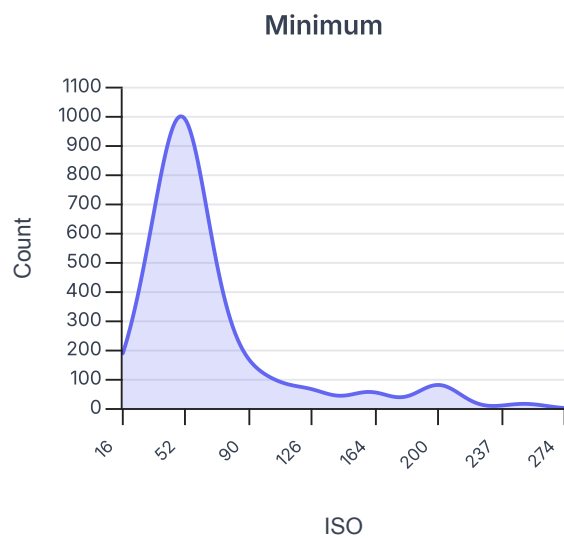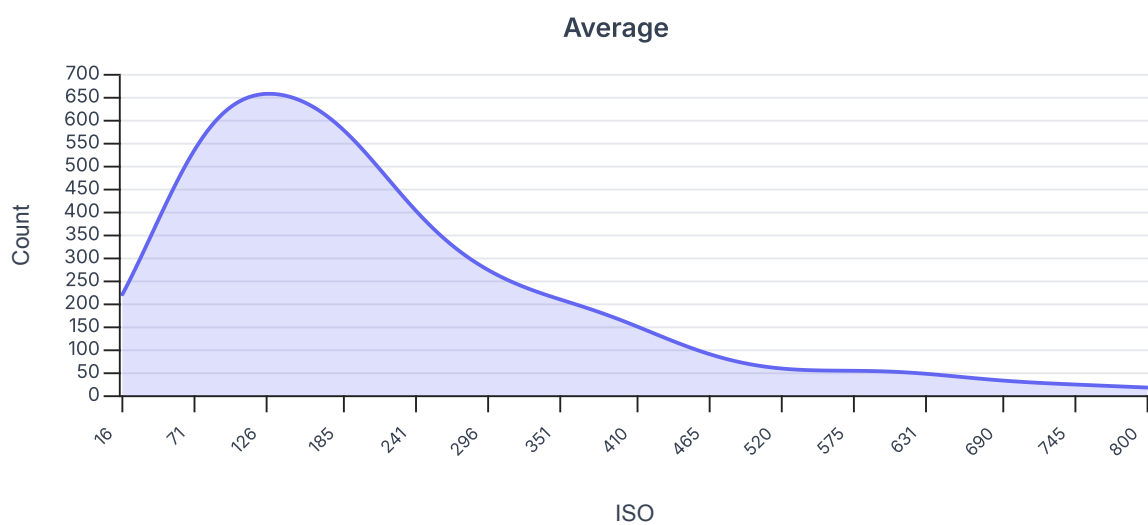

Brightness Value

