



Rapiscan 515



The **Rapiscan Model 515** is an x-ray security inspection system designed for customers with new and expanding security requirements. The Model 515 has a fully configurable technology menu, which allows the user to choose the best value for their application and budget. Its compact design and removable control panel make the system an excellent choice for numerous security applications. The system offers a tunnel opening of 640mm (25.2 inches) wide by 430mm (16.9 inches) high to accommodate large package sizes.

Intel Pentium® computer technology is the driving force in all of our developments. The **Model 515** base configuration includes multi-energy technology with the following standard features: Crystal Clear™, Density Threat Alert, Edge Enhancement, Variable Gamma, Inverse Video, Organic/Inorganic Stripping, Pseudo Color and Variable Zoom.

The **Model 515** may also be configured with the following advanced options:

Enhanced Performance X-ray (EPX): EPX enables rapid and consistent detection capability, identifying materials having specific characteristics of explosives and narcotics. Gold, currency and agricultural products can also be identified using EPX.

Threat Image Projection (TIP): Provides real time operator training and performance monitoring. The system inserts threat objects at predefined settings and intervals, into otherwise clean bags allowing supervisors to monitor operator's response. Multiple language choices are available for on screen dialogue with the operator.

The **Model 515** is part of the Rapiscan 500 Series product design, which offers a wide range of product configurations. We invite you to contact your sales representative for additional information.

Rapiscan Security Products

RAPISCAN

An **OSI** SYSTEMS Company

Specifications

GENERAL

Resolution:	38 AWG guaranteed, 40 AWG typical
Penetration:	27mm steel guaranteed, 29mm typical
Material Separation:	Low Z, Medium Z, High Z to 0.5 Z accuracy
Monitor:	17-inch SVGA color, high refresh, non flicker
Power:	110 VAC +/- 10%/60Hz/6AMP Max or 230 VAC +/- 10%/50Hz/3AMP Max

X-RAY GENERATOR

Cooling:	Sealed oil bath with forced air
Anode Voltage:	160KV rated, operating @ 140KV
Tube Current:	0.7 mA typical

COMPUTER SPECIFICATIONS

Processor Speed:	833 MHz Pentium® Processor minimum
Memory:	64 MB RAM minimum
Video Memory:	16 MB minimum
Hard Disk Drive:	8 GB minimum
CD-ROM Drive:	40X Max Variable
Floppy Disk:	1.44 MB


ENVIRONMENTAL REQUIREMENTS

Storage Temperature:	-20°C to 50°C
Operating Temperature:	0°C to 40°C
Relative Humidity:	5 to 95% non-condensing

HEALTH & SAFETY

All Rapiscan systems comply with all applicable international health and safety regulations including USA FDA X-ray systems (Federal Standard 2.1-CFR 1020.40) and Health and Safety at Work Act 1974-section 6, Amended by the Consumer Protection Act 1987. Maximum leakage radiation less than 0.1mR/h (1µ Sv/hr) in contact with outer panels. Film Safety: For ISO 1600/33 DIN, guaranteed up to 10 times exposure to radiation.

Dimensions

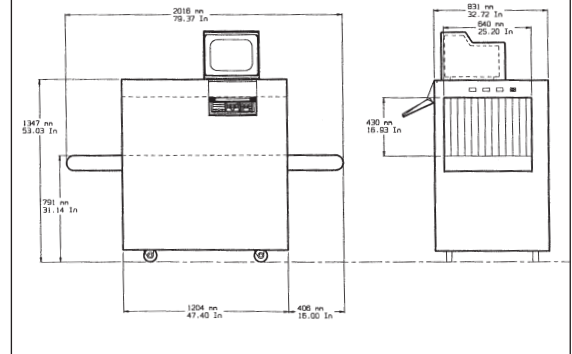

PHYSICAL SPECIFICATIONS

Dimensions:	Length: 2016mm (79.37 in.) Height: 1347mm (53.03 in.) Width: 831mm (32.72 in.)
Tunnel Size:	640mm (W) x 430mm (H). (25.20 x 16.93 in.)
Conveyor Speed:	0.22 M/Sec (44ft/min)
Conveyor Load:	50Kg (110 lbs)
Approx Weight:	Net : 550 Kg (1210 lbs) Gross: 750 Kg (1650 lbs)
Unit is mounted on heavy duty castors for ease of movement	

STANDARD FEATURES

- Crystal Clear™
- Multi Energy Imaging (4 color)
- Density Threat Alert
- Variable Edge Enhancement
- High/Low Penetration
- Variable Gamma
- Inverse Video
- Pseudo Color
- Variable Density Zoom
- Organic/Inorganic Stripping
- Black and White Viewing
- Variable Color Stripping
- 2, 4, 6, and 8 times Zoom
- View previous bag (up to 2 screens)
- Baggage Counter
- Search Indicator
- Date/Time display
- Full diagnostic built in test facility

OPTIONS

- Enhance Performance X-ray (EPX)
- Operator Training Program
- Threat Image Projection (TIP)
- TIP Network
- Target - Screener Assist Technology
- Manual Image Archiving
- Automatic Image Archiving
- VCR Output
- Video Printer
- Power Conditioner
- Operator Console
- Secure Workstation
- Remote Workstation
- Baggage Handling Accessories
- Foot-mat
- UPS (Uninterrupted Power Supply)
- High Speed Conveyor
- Plexi-Glass Tunnel Covers

Rapiscan Security Products

RAPISCAN

An OSI SYSTEMS Company

www.rapiscan.com

USA

3232 W. El Segundo Blvd.
Hawthorne
California 90250
USA
Tel: (310) 978-1457
Fax: (310) 349-2491
E-mail: sales@rapiscan.com

UK

Unit B1, The Fleming Centre
Fleming Way
Crawley, West Sussex
England, RH10 2NN
Tel: 44 (0) 1293-540661
Fax: 44 (0) 1293-542019

Middle East (Service)

PO Box 9197
Al Jadaf Port
Shed DY 14
Dubai
United Arab Emirates
Tel: 971-4-3240430
Fax: 971-4-3240353

Asia Pacific

240 Macpherson Road
#06-04 Pines Industrial Building
Singapore 348574
Tel: 65-743-9892
Fax: 65-743-9885 / 743-9915