



Stock 1D RVV vs T1 2D RVV: data residency & H/V mode flip

On a 1D vector machine each image row must be fetched into a register and stored back; switching orientation forces strided memory access. T1 keeps the whole plane in the VRF and toggles horizontal↔vertical with one Configuration and Status Register(CSR) bit.

Task A • Process all N rows of an image (e.g. load/store a grid of matrix / pixels)

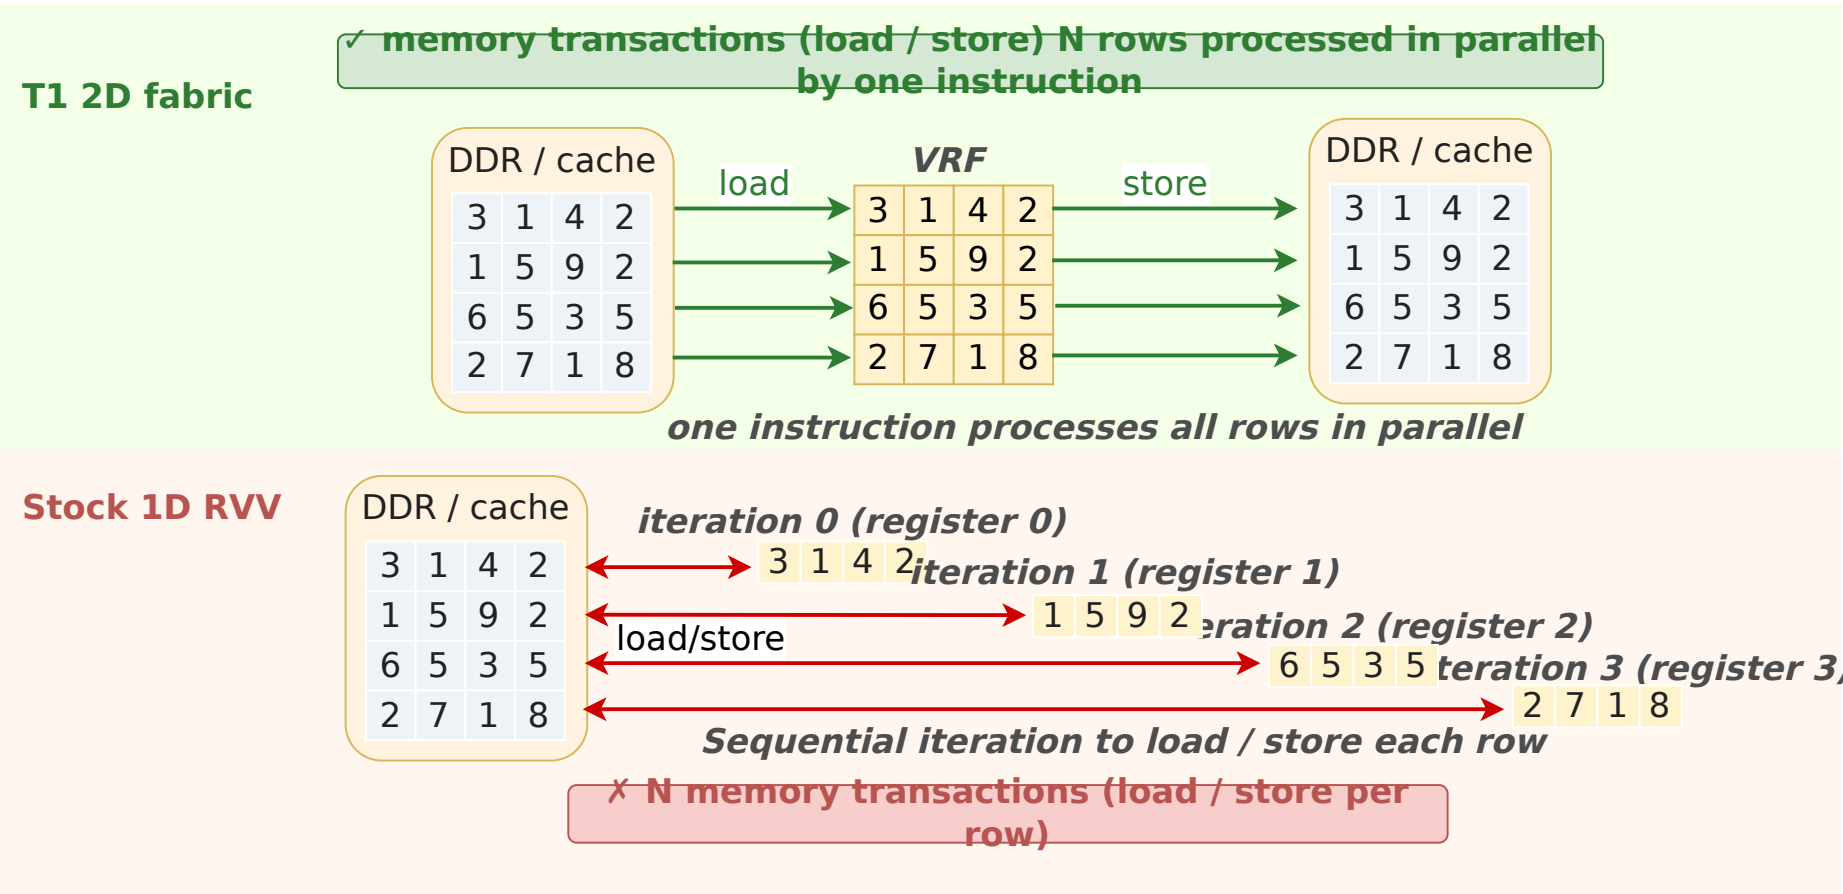

Task B • Alternating Horizontal & Vertical operations (with serial data dependency)

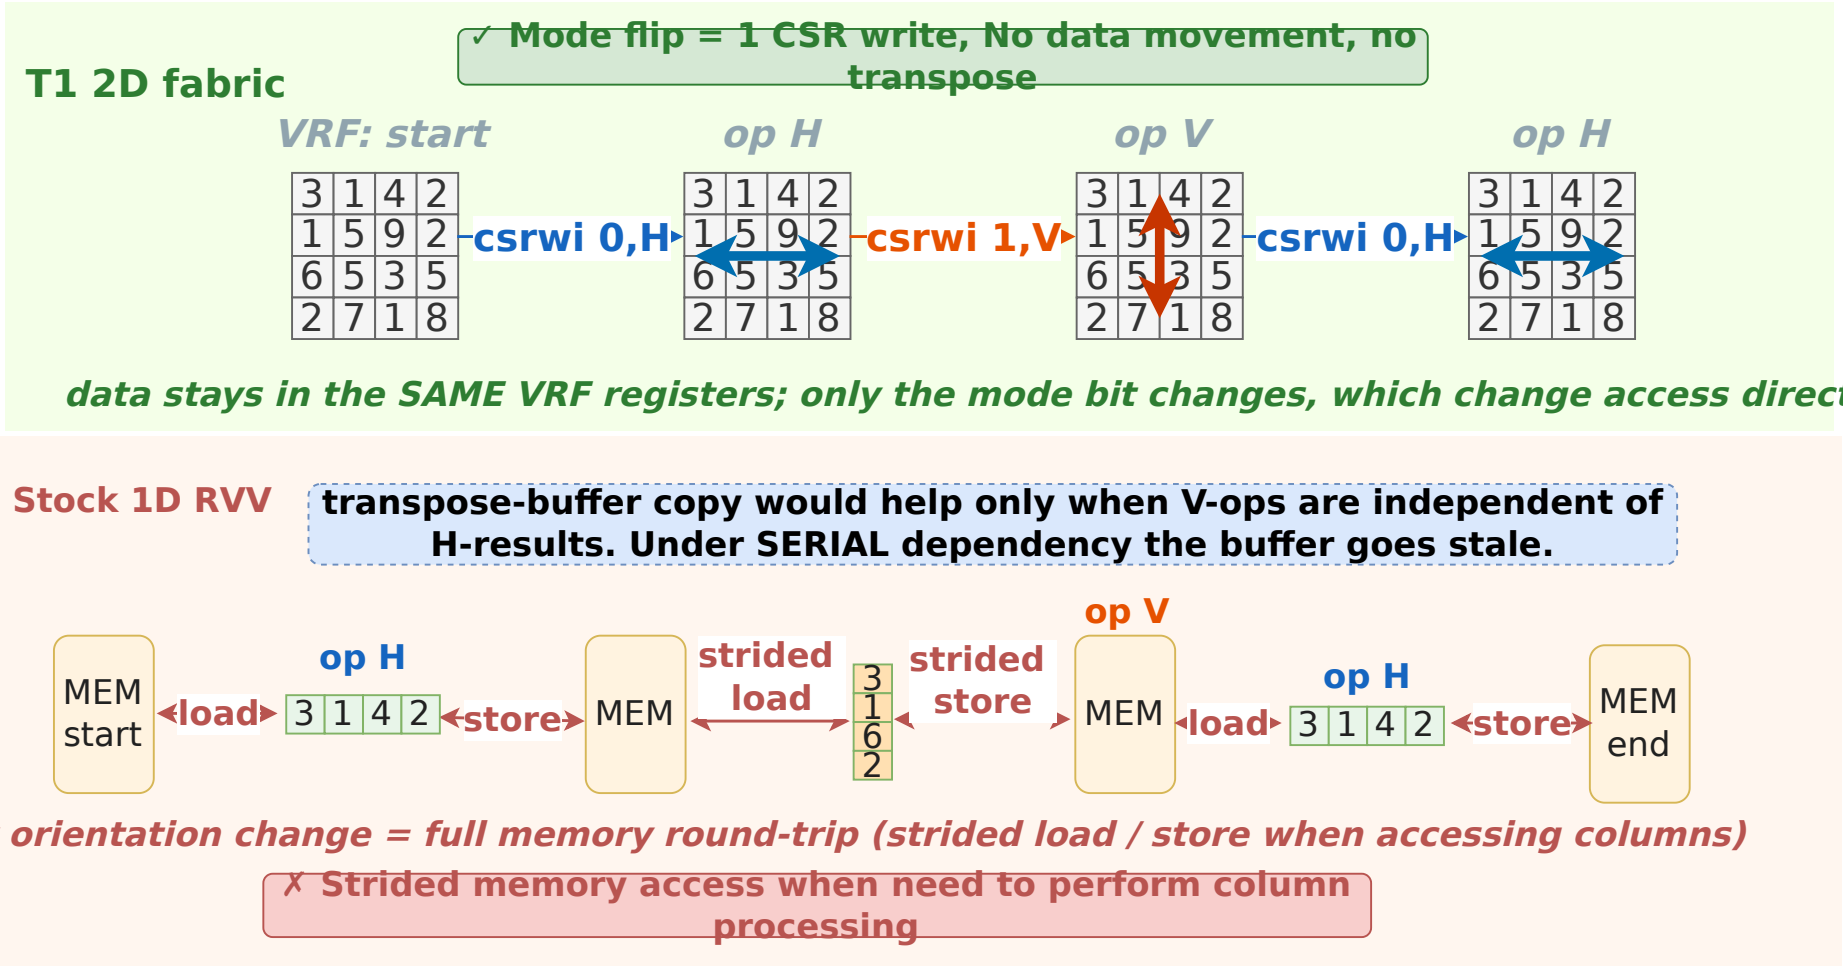

Summary

Aspect	Stock 1D RVV	T1 2-D fabric
Image residency	streams row-by-row through registers	whole image plane lives in VRF
Memory traffic (N×N image)	2N transactions (load + store per row)	2 transactions (load once, store once)
Switching H ↔ V	strided memory load + strided store	one CSR bit (csrwi 0x7c0)
Serial dependent H/V chain	each step pays the full memory round-trip; transpose-buffer cannot be reused	data never leaves VRF; mode flips between consecutive instructions