



FACULTY  
OF ELECTRICAL  
ENGINEERING  
CTU IN PRAGUE



# Acoustic-Based Detection, Classification, and Localization of Impulsive Sounds

Jakub Svatoš     Martin Maxa

Czech Technical University in Prague

Faculty of Electrical Engineering, Department of Measurement

27<sup>th</sup> IMEKO TC4 Conference 2026  
with Special TC11 Technical Session

September 16, 2026

# Motivation and research questions

- Acoustic detection of gunfire complements camera-based surveillance: the acoustic channel is omnidirectional and does not require line of sight.
- Three required functions, in outdoor environments that are noisy and reverberant:



## **detection**

of the impulsive event



## **classification**

ideally down to calibre



## **localization**

of the source, in 2D

## **This study**

1. Which cepstral representation separates gunshots from acoustically similar false alarms most reliably?
2. Neural network or support vector machine on those features?
3. How does the analysis frame length interact with environmental reflections?

# Motivation and research questions

- Acoustic detection of gunfire complements camera-based surveillance: the acoustic channel is omnidirectional and does not require line of sight.
- Three required functions, in outdoor environments that are noisy and reverberant:



## **detection**

of the impulsive event



## **classification**

ideally down to calibre




## **localization**

of the source, in 2D

### **This study**

1. Which cepstral representation separates gunshots from acoustically similar false alarms most reliably?
2. Neural network or support vector machine on those features?
3. How does the analysis frame length interact with environmental reflections?


# The acoustic signature of a gunshot

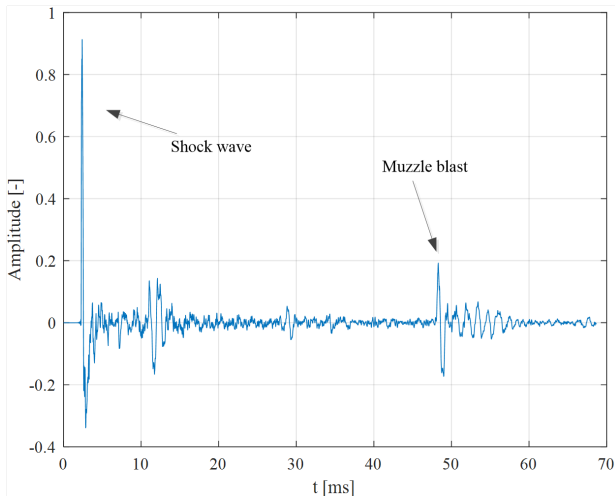

One or two components, depending on projectile speed:

- **Shock wave** (“N-wave”) – *supersonic only* ( $v > c$ ); generated along the trajectory, so it arrives first.
- **Muzzle blast** – *always present*; propellant gases at the barrel, 1–3 ms; here  $\approx 45$  ms behind.
- Between and after: **reflections**.

# The acoustic signature of a gunshot

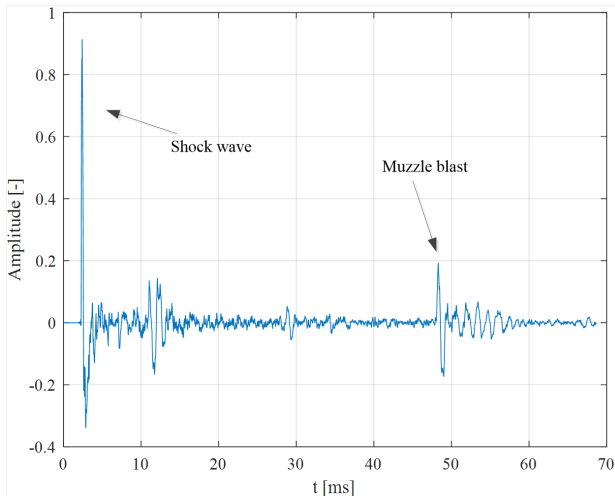

One or two components, depending on projectile speed:

- **Shock wave** (“N-wave”) – *supersonic only* ( $v > c$ ); generated along the trajectory, so it arrives first.
- **Muzzle blast** – *always present*; propellant gases at the barrel, 1–3 ms; here  $\approx 45$  ms behind.
- Between and after: **reflections**.


# Single-domain analysis is insufficient

- **Spectral analysis alone** often captures environmental noise rather than the gunshot itself.
- **Time-domain patterns** get distorted by nonlinear dispersion and obstacles.

## Consequence


Effective feature extraction must integrate *both* time and frequency domain processing.

# Proposed system architecture

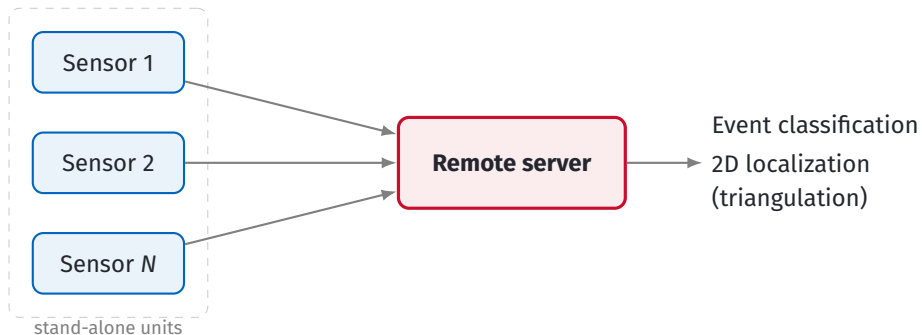

- Each sensor continuously monitors its surroundings and transmits detected signals to the server for advanced processing.
- Multiple units give broader coverage and adaptability to environments.
- Tested with various firearm calibers and ammunition.

# Localization – bearing from TDoA

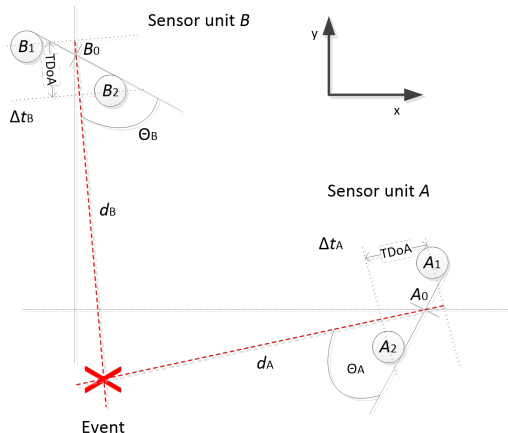


$$\Theta = \arcsin\left(\frac{c \Delta n}{d f_s}\right)$$

- Two MEMS microphones per unit ( $d = 0.186$  m,  $f_s = 44.1$  kHz) give one **bearing**  $\Theta$ .
- Two units, two bearings – they **intersect** at the event.
- Measured: cross-correlation with parabolic interpolation, **MAE 0.77°** over 70 events ( $-45^\circ$  to  $+60^\circ$ ).




# Localization – bearing from TDoA

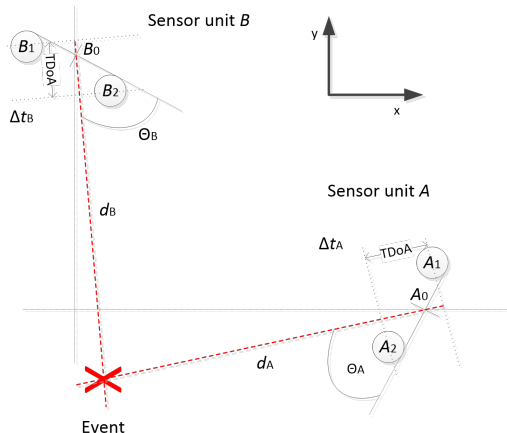

$$\Theta = \arcsin\left(\frac{c \Delta n}{d f_s}\right)$$

- Two MEMS microphones per unit ( $d = 0.186$  m,  $f_s = 44.1$  kHz) give one **bearing**  $\Theta$ .
- Two units, two bearings – they **intersect** at the event.
- Measured: cross-correlation with parabolic interpolation, **MAE 0.77°** over 70 events ( $-45^\circ$  to  $+60^\circ$ ).

# Feature extraction – cepstral coefficients

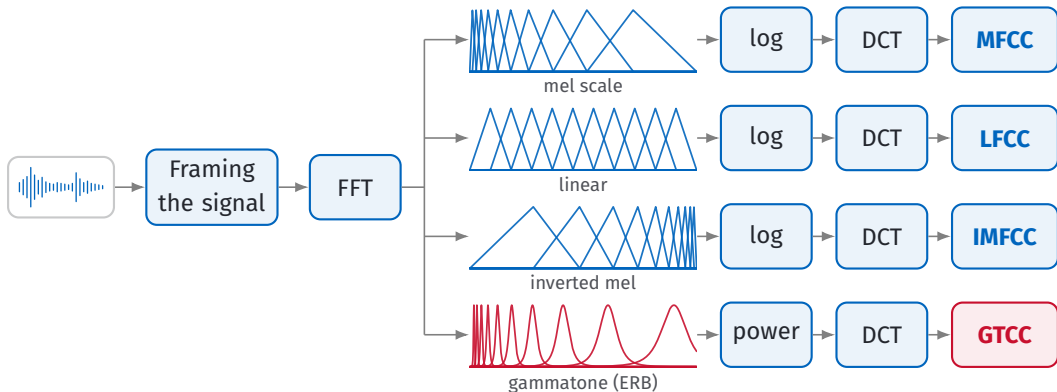

# Feature extraction – the four filter banks



## **MFCC** – mel scale

dense at low frequencies;  
speech-born,  
validated on  
gunshots at  
military ranges




## **LFCC** – linear

equally spaced  
filters, uniform  
resolution  
across the band



## **IMFCC** –

inverted mel  
mirror of the mel  
scale: dense at  
high frequencies



## **GTCC** – gammatone

auditory model, ERB  
spacing; **reported**  
**more noise-robust**  
**than MFCC**



Experimental grid: 4 extractors  $\times$  3 frame lengths (15 / 30 / 50 ms)  $\times$  2 classifiers (NN, SVM).

## Classification results – 9 mm class

| Frame | Extractor   | ACC (%)      |              | RLC (%)      |              | MCC (–)     |             |
|-------|-------------|--------------|--------------|--------------|--------------|-------------|-------------|
|       |             | SVM          | NN           | SVM          | NN           | SVM         | NN          |
| 15 ms | MFCC        | 83.90        | 85.59        | 80.65        | 67.74        | 0.62        | 0.62        |
|       | LFCC        | 83.90        | 83.90        | 80.65        | 64.52        | 0.62        | 0.57        |
|       | IMFCC       | 85.59        | 90.68        | 83.87        | 87.10        | 0.66        | 0.77        |
|       | <b>GTCC</b> | <b>93.22</b> | <b>97.46</b> | <b>87.10</b> | <b>93.55</b> | <b>0.82</b> | <b>0.93</b> |
| 30 ms | MFCC        | 84.75        | 87.29        | 67.74        | 87.10        | 0.60        | 0.70        |
|       | LFCC        | 87.29        | 83.90        | 70.97        | 70.97        | 0.66        | 0.59        |
|       | IMFCC       | 85.59        | 92.37        | 67.74        | 80.65        | 0.62        | 0.80        |
|       | <b>GTCC</b> | <b>97.46</b> | <b>98.31</b> | <b>90.32</b> | <b>93.55</b> | <b>0.93</b> | <b>0.96</b> |
| 50 ms | MFCC        | 84.75        | 93.22        | 74.19        | 90.32        | 0.61        | 0.83        |
|       | LFCC        | 88.98        | 86.44        | 77.42        | 77.42        | 0.71        | 0.66        |
|       | IMFCC       | 89.83        | 90.68        | 74.19        | 80.65        | 0.73        | 0.76        |
|       | <b>GTCC</b> | <b>97.46</b> | <b>99.15</b> | <b>90.32</b> | <b>96.77</b> | <b>0.93</b> | <b>0.98</b> |

Classification results for the 9 mm class. Test partition: 118 events, 31 of them 9 mm.

# Classification results – MCC at a glance

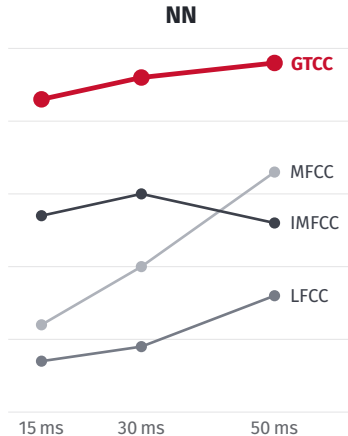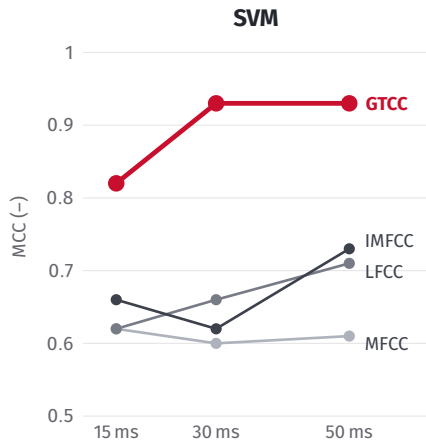

MCC for the 9 mm class by frame length – the same data as the table (118 test events, 31 of them 9 mm).

- **MFCC, LFCC and IMFCC yield similar results.**
- **GTCC consistently performs better** across every frame length and both classifiers.
- **NN outperforms SVM** – better at modelling complex patterns, especially with longer frames.
- **Longer frames improve accuracy**, but start to capture environmental reflections, which can pull focus away from the gunshot itself.

## Best configuration in the table

GTCC + NN at 50 ms – 99.15 % ACC, 96.77 % RLC, MCC 0.98.

- MFCC, LFCC and IMFCC yield similar results.
- **GTCC consistently performs better** across every frame length and both classifiers.
- **NN outperforms SVM** – better at modelling complex patterns, especially with longer frames.
- **Longer frames improve accuracy**, but start to capture environmental reflections, which can pull focus away from the gunshot itself.

## Best configuration in the table

GTCC + NN at 50 ms – 99.15 % ACC, 96.77 % RLC, MCC 0.98.

- A distributed network of stand-alone acoustic sensors with a remote server detects, classifies and localizes impulsive sounds in 2D.
- Cepstral coefficients are an effective feature extractor for gunshot classification with both NN and SVM.
- GTCC beats Mel-frequency based coefficients; NN achieves slightly better classification success, especially with longer frames.
- Validated with various firearm calibers and ammunition.

Thank you – questions?

svatoja1@fel.cvut.cz   maxamart@fel.cvut.cz



## Appendix – experimental setup and dataset

- Military shooting range, fixed sensor position, clear line of sight to every firing position.
- Four weapons: 9 mm, 5.56 NATO SD, 7.62 mm Tokarev, .22 – each with a single ammunition type.
- Plus a false-alarm class with gunshot-like impulsive patterns.
- 26 features per extractor;  $\approx 75 / 25$  train–test split.
- NN: MATLAB Neural Fitting, Levenberg–Marquardt, 370 iterations.

| Class |                 | Train      | Test       |
|-------|-----------------|------------|------------|
| 0     | False alarms    | 86         | 21         |
| 1     | <b>9 mm</b>     | <b>70</b>  | <b>31</b>  |
| 2     | 5.56 NATO SD    | 100        | 31         |
| 3     | 7.62 mm Tokarev | 55         | 17         |
| 4     | .22             | 60         | 18         |
| Total |                 | <b>371</b> | <b>118</b> |

Svatoš & Holub, *Meas. Sci. Technol.* **35** (2024) 076122, Table 2.

## Appendix – bearing estimation methods

| Method                                       | MAE          | Median       | Max          |
|----------------------------------------------|--------------|--------------|--------------|
| Cross-correlation                            | 0.84°        | 0.41°        | 7.61°        |
| <b>Cross-correlation + parabolic interp.</b> | <b>0.77°</b> | <b>0.56°</b> | <b>6.67°</b> |

70 events, 9 reference angles from  $-45^\circ$  to  $+60^\circ$ ,  $d = 0.186$  m,  $f_s = 44.1$  kHz. A phase-based delay estimator was also evaluated and performed worse (MAE  $3.24^\circ$ ); cross-correlation was adopted.

### Sub-sample interpolation matters

- max. delay  $\approx 24$  samples for this geometry
- parabolic fit on the correlation peak
- $0.84^\circ \rightarrow 0.77^\circ$  MAE

### How many units for 2D?

- ToA, 1 mic per unit – 3 units
- TDoA, 1 mic per unit – 4 units
- **TDoA, 2 mics per unit – 2 units**

## Appendix – other cepstral coefficients

- **LPCC** (Linear Prediction Cepstral Coefficients) and **PLPC** (Perceptual Linear Prediction Coefficients) – noise elimination, speech recognition.
- **GFCC** (Greenwood Function Cepstral Coefficients) – derived from human auditory response models, used for classifying animal sounds.
- **GTCC** (Gammatone-Frequency Cepstral Coefficients) – same family, greater resistance to noise than MFCC.

## Appendix – metrics

**ACC** Accuracy – share of correctly classified events.

**RLC** Recall, also known as *sensitivity* – share of actual gunshots of the class that were detected.

**MCC** Matthews Correlation Coefficient – balanced measure robust to class imbalance; +1 perfect, 0 random.

Definitions as used in the source study: Svatoš & Holub, *Meas. Sci. Technol.* **35** (2024) 076122, eqs. (1)–(3).