
Static
Routing

Static Routing

Concepts

Connected subnet has been learnt automatically with the "**C**" pointer (Directly connected).

In the *Static Routing* , all the records should be add to the router's routing table manually and will be shown with the "**S**" pointer (Static).

Static Routing

Configuration

Router(config)# ip route *<Network ID> <Mask> <Outgoing-interface>* **|** *<Next-hop-IP-address>*

Router# show ip route

Example


Router(config)# ip route *192.168.3.0 255.255.255.0* serial *1/0 10.10.10.2*

Adds the route to the network 192.168.3.0 trough the interface S1/0 and the next hop address of 10.10.10.2.

Static Route Components

- **Network ID** (Mandatory)
- **Subnet Mask** (Mandatory)
- **Out going interface** OR **Next hope address**


Static Routing

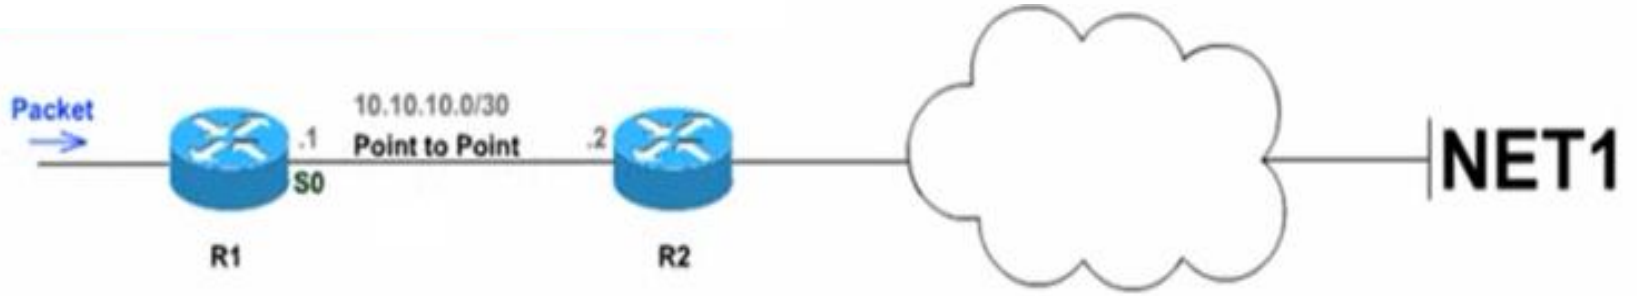

R1 Routing Table

NET1/Mask	S0

Static Route Components

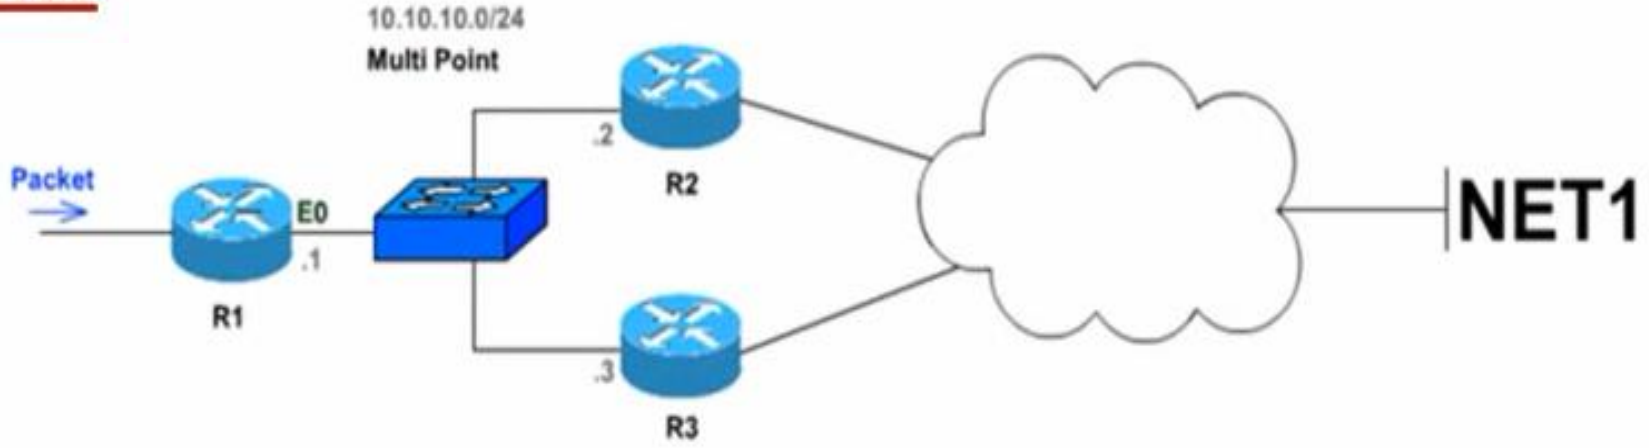

R1 Routing Table

NET1/Mask	E0	10.10.10.3