

ENVIRONMENT FRIENDLY PET HEAT SHRINK FILM



◆ **Product Series No.:** YBR206M/L--

◆ **Property Data:**

Item	Unit	Direction	Data	Testing Method
Thickness	μm		20~80	ASTM D374
Tensile Strength	Mpa	MD	≥60	ASTM D882
		TD	≥200	
Elongation at Break	%	MD	≥300	ASTM D882
		TD	≥35	
Heat Shrinkage	%	MD	10~50	ASTM D1204 90°C/10sec/Water
		TD	70~50	
C.O.F	us/uk	--	≤0.60/0.55	ASTM D1894E
Haze	%	--	≤7.0	ASTM D1003
Gloss (45°)	--	--	≥100	ASTM D2457
Density	Kg * m ⁻³	--	≤1.32	ASTM D792

Unit Correlation: N/mm²=Kg/mm²×9.8 psi=Kg/mm²×1422.3

◆ **Application:**

All kinds of products in:

- Home care (Laundry, Fabric care, Detergent, Cleaning products etc.)
- Personal Care (Hair care, Soap and Bath products, Oral care, Skin care, Cosmetics etc.)
- Dairy (Yogurt Cup, Coffee creamer, Ice cream etc.)
- Food and Beverage (Sauces, Snacks, Soft drinks, Fruit juices, Water, Alcoholic drinks etc.)
- Nutrition product/Supplement (Baby food, Healthy foods etc.)

◆ **Notes:**


☆ Information above is only for reference. Considering the difference between customers in terms of equipment, process conditions, applications and specific requirements etc., Yinjinda will be responsible for the film property itself only instead of each using method and requirements from different customers

☆ For storing, we suggest that the temperature for storing and transporting should be below 30°C with quality guarantee period of 6 months.

☆ In order to get better printing effect, we recommend using printing ink exclusively used for

☆ Please read the Material Safety Data Sheet (MSDS) carefully prior to use.

◆ **Shrinkage Curve:**

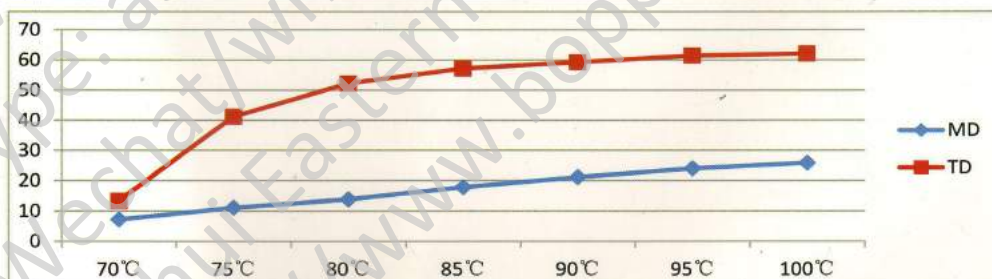

**ENVIRONMENT FRIENDLY
PET HEAT SHRINK FILM**

◆ **Product Series No.: YMR206H**

◆ **Property Data:**

Item	Unit	Direction	Data	Testing Method
Thickness	μm		20~80	ASTM D374
Tensile Strength	Mpa	MD	≥45	ASTM D882
		TD	≥200	
Elongation at Break	%	MD	≥400	ASTM D882
		TD	≥35	
Heat Shrinkage	%	MD	≤5	ASTM D1204 90°C/10sec/Water
		TD	≥70	
C.O.F	us/uk	--	≤0.60/0.55	ASTM D1894E
Haze	%		≤7.0	ASTM D1003
Gloss(45°)	--		≥100	ASTM D2457
Density	Kg * m ⁻³		≤1.32	ASTM D792

Unit Correlation: $N/mm^2 = Kg/mm^2 \times 9.8$ $psi = Kg/mm^2 \times 1422.3$

◆ **Application:**

Widely used for bottle (big diameter difference between bottleneck and body) film labelling, eg. beverage bottles packaging, cleaning and bathing products packaging and cosmetics packaging.


◆ **Notes:**

☆ Information above is only for reference. Considering the difference between customers in terms of equipment, process conditions, applications and specific requirements etc., Yinjinda will be responsible for the film property itself only instead of each using method and requirements from different customers.

☆ For storing, we suggest that the temperature for storing and transporting should be below 30°C with quality guarantee period of 6 months.

☆ In order to get better printing effect, we recommend using printing ink exclusively used for

☆ Please read the Material Safety Data Sheet (MSDS) carefully prior to use.

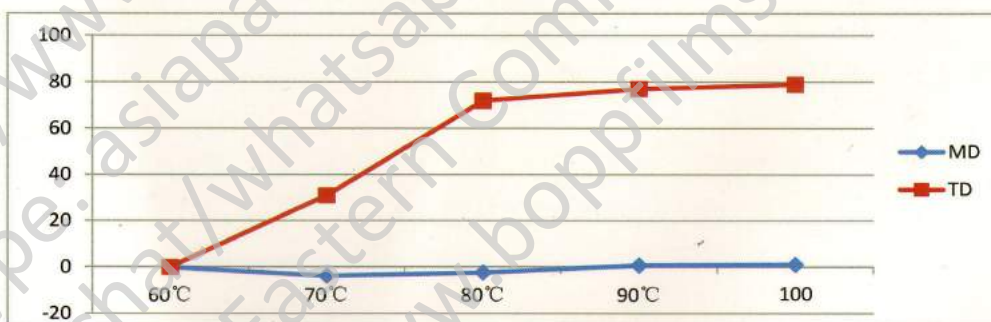◆ **Shrinkage curve:**


**ENVIRONMENT FRIENDLY
PET HEAT SHRINK FILM**


◆ **Product Series No.:** YMR206M

◆ **Property Data:**

Item	Unit	Direction	Data	Testing Method
Thickness	μm		20~80	ASTM D374
Tensile Strength	Mpa	MD	≥50	ASTM D882
		TD	≥200	
Elongation at Break	%	MD	≥400	ASTM D882
		TD	≥35	
Heat Shrinkage	%	MD	≤10	ASTM D1204 90°C/10sec/Water
		TD	50~70	
C.O.F	us/uk	--	≤0.60/0.55	ASTM D1894E
Haze	%		≤7.0	ASTM D1003
Gloss(45°)	--		≥100	ASTM D2457
Density	Kg * m ⁻³		≤1.32	ASTM D792

Unit Correlation: N/mm²=Kg/mm²×9.8 psi=Kg/mm²×1422.3

◆ **Application:**

Widely used for all kinds of bottle film labelling, eg.beverage bottles packaging , cleaning and bathing products packaging and cosmetics packaging.

◆ **Notes:**


☆ Information above is only for reference. Considering the difference between customers in terms of equipment, process conditions, applications and specific requirements etc., Yinjinda will be responsible for the film property itself only instead of each using method and requirements from different customers

☆ For storing, we suggest that the temperature for storing and transporting should be below 30°C with quality guarantee period of 6 months.

☆ In order to get better printing effect, we recommend using printing ink exclusively used for

☆ Please read the Material Safety Data Sheet (MSDS) carefully prior to use.

◆ **Shrinkage curve:**

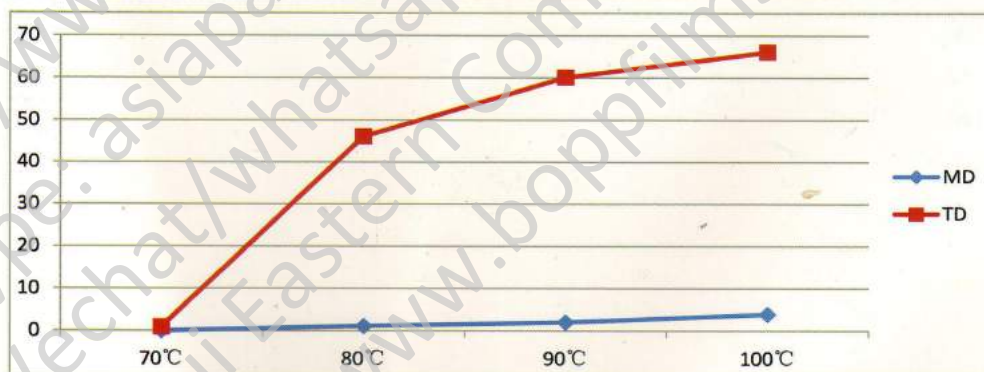

聚酯薄膜测试报告单

REPORT OF QUALITY

客户 (CUSTOMER)		型号 (TYPE)	YMR206H
生产时间 (PRO. DA.)		检验时间 (TEST DA.)	2014.10.25
检验员 (TESTER)		审核者 (SIGNATURE)	ZQG
批号NO:		0B1410251958200323	
性能 PROPERTY	测试方法 TEST METHOD	单位 UNIT	测试值VALUE
型号 TYPE			YMR206H
厚度 THICKNESS	ASTM D 374	μm	39.85
拉伸强度 TENSILE STRENGTH	MD	Mpa	72.9
	TD		265
弹性模量 MODULUS	MD	Mpa	1810
	TD		4670
断裂伸长率 ELONGATION	MD	%	530
	TD		44
热收缩率 HEAT SHRINKAGE	MD	%	0
	TD		75.2
雾度 HAZE	ASTM D 1003	ASTM D 1204 □90℃/10SEC水浴	3.79
光泽度(45°) GLOSS	ASTM D 2457	—	112
摩擦系数 (内面/外面) C.O.F(IN/OUT)	μs/μk	ASTM D 1894E	—
润湿张力 WETTING TENSION	ASTM D 2578	mN/m	0.388/0.371
备注 REMARK			40