



FTDI
All signals are lead to XT connector.
RXD and TXD pins are flipped and lead to ATmega128rfa1



FTDI Chip connector
Contains all FTDI pins on a 2x7 pins connector
Pins are 3.3V level internal connected

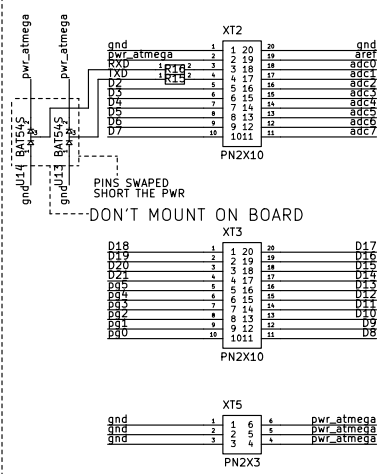

PINS SWAPPED
SHORT THE PWR
DON'T MOUNT ON BOARD

File: rfAtmega128.sch

Sheet: /

Title:

Size: A4

Date: 26 oct 2012

Rev:

KiCad E.D.A.

Id: 1/1