

Delft University of Technology  
Master's Thesis in Embedded Systems

# TODO TITLE

**B.T. Blokland**





TODO TITLE

Master's Thesis in Embedded Systems

Embedded Software Section  
Faculty of Electrical Engineering, Mathematics and Computer Science  
Delft University of Technology  
Mekelweg 4, 2628 CD Delft, The Netherlands

B.T. Blokland  
b.t.blokland@student.tudelft.nl

12th February 2019

**Author**

B.T. Blokland (b.t.blokland@student.tudelft.nl)

**Title**

TODO TITLE

**MSc presentation**

12th February 2019

**Graduation Committee**

TODO GRADUATION COMMITTEE Delft University of Technology

TODO GRADUATION COMMITTEE Delft University of Technology

## **Abstract**

TODO ABSTRACT



# Preface

TODO MOTIVATION FOR RESEARCH TOPIC

TODO ACKNOWLEDGEMENTS

TODO AUTHOR

Delft, The Netherlands  
12th February 2019





# Contents

<b>Preface</b>	<b>v</b>
<b>1 Introduction</b>	<b>1</b>
<b>2 Related work</b>	<b>3</b>
2.1 Energy Harvesting Platforms . . . . .	3
2.2 Programming Models For Intermittent Computing . . . . .	3
2.3 Wireless Sensor Network Testbeds . . . . .	3
2.3.1 FIT IoT-LAB . . . . .	3
2.3.2 Flocklab . . . . .	6
2.3.3 Indriya2 . . . . .	6
2.4 Development Tools For Batteryless Devices . . . . .	6
2.4.1 Ekho . . . . .	6
2.4.2 Flicker . . . . .	7
2.4.3 Energy aware debugger . . . . .	7
2.5 Contribution . . . . .	7



# Chapter 1

## Introduction

The Internet-of-Things (IoT) is a promising vision which enables trillions of sensor devices to be connected. A common bottleneck for such devices is the energy supply. Batteries are large, expensive, heavy and wear out after several years.

A more sustainable solution than batteries, is energy harvesting where a device collects it's energy from the environment i.e. solar, radio frequency (RF), thermal or kinetic energy.

However, developing software for such devices comes with a challenge. Environmental energy can be scarce, causing frequent power failures. This contrasts with the standard assumption that programs run continuously throughout execution. The programmer has to take care of this intermittent behavior by i.e. storing data to non-volatile memory at certain intervals. The available energy tends to be random, making it difficult to predict how long a program can execute before the next power failure.

It is hard to conduct repeatable tests due to the random nature of the energy source. While comparing two algorithms, it is impossible to conclude that one algorithm outperforms the other without knowing how much the difference in available energy contributed to the result.

The goal of this thesis is to make a testbed that counters this issue, by using Ekho [7]. This an emulator capable of accurately recreating, repeatable harvesting conditions in a lab. The testbed will be made remotely accessible to reduce the effort of setting up such an environment and accelerating development in this field of study.

TODO ORGANISATIONAL DESCRIPTION OF THESIS



## Chapter 2

# Related work

For batteryless, intermittently powered devices there are no publicly available testbeds. This paper [1] enlists properties and features that such a testbed should have, calling for more coordinated action in this domain research. It also presents a minimal implementation of such a testbed.

There has been extensive research into the field of Wireless Sensor Networks (WSN) testbeds, which have closely related features. Besides these testbeds, several tools exist which help in developing applications for battery less devices. These will be discussed as well.

### 2.1 Energy Harvesting Platforms

In this section a brief overview is given of energy harvesting platforms by looking at some research and commercial examples.

Radio Frequency Identification (RFID) tags are a basic energy harvesting solution available on the market.

### 2.2 Programming Models For Intermittent Computing

### 2.3 Wireless Sensor Network Testbeds

#### 2.3.1 FIT IoT-LAB

FIT IoT-LAB [2] provides a very large scale infrastructure facility suitable for testing small wireless sensor devices and heterogeneous communicating objects.

IoT-LAB features over 2000 wireless sensor nodes spread across six different sites in France. Nodes are either fixed or mobile and can be allocated in various topologies throughout all sites. A variety of wireless sensors are available, with different processor architectures (MSP430, STM32 and

Platform	Description	MCU	Radio	Energy Harvester	Energy Source	Year	Citations
WISP [10]	Family of sensors that are powered and read by UHF RFID readers	MSP430	Backscattering	Transducer and rectifiers	RF	2008	639
Umich Moo [12]	Improvement on design of WISP	MSP430	Backscattering	Transducer and rectifiers	RF	2011	63
Flicker [8]	Configurable development board for batteryless IoT	MSP430	CC1101, nRF51822, backscattering	Solar cell, transducer and rectifiers, LTC3588,	Solar, RF, Kinetic	2017	11
Capybara [5]	Co-designed hardware/software power system with dynamically reconfigurable energy storage capacity	MSP430, CC2650	CC2650	TrisolX solar panels, low-power voltage source	Solar, energy source emulation	2018	11
Pible [6]	BLE batteryless platform	CC2650	build in MCU	Solar panels	Solar	2018	2

Table 2.1: Research Based Energy Harvesting Platforms.

Company	Description	MCU		Radio	Energy Harvester	Energy Source
EnOcean	Various battery less solutions for i.e. Building Automation and Smart Home	8051 processor	pro-	TCM 3x0	ECO 200, ECS 300, ECT 310 Perpetuum	Solar, motion, thermal
Powercast	Provides wireless power solutions, RFID tags, RF power transmitter, RF power harvester	PIC24F		IEEE 802.15.4 transceiver, TX91502	PCC110	RF
Williot	Makes a batteryless bluetooth beacon device based on RF harvesting	ARM processor	pro-	N/A	N/A	RF
PsiKick	Provides batteryless monitoring solutions to mainly the industry. Related to the university of Virginia and Michigan.	Custom ULP SoC, ARM architecture [11]		Build in SoC	N/A	Solar, thermal

Table 2.2: Commercial Energy Harvesting Platforms.

Cortex-A8) and different wireless chips (802.15.4 PHY @ 800 MHz or 2.4 GHz). In addition, open nodes can receive custom wireless sensors for inclusion in IoT-LAB testbed.

### **2.3.2 Flocklab**

Flocklab [9] is a wireless sensor network (WSN) testbed, developed and run by the Computer Engineering and Networks Laboratory at the Swiss Federal Institute of Technology Zurich (ETH Zurich) in Switzerland. FlockLab's key features include:

- FlockLab's observer based testbed architecture which provides services for detailed testing of sensor nodes:
- Time accurate pin tracing
- Time accurate pin actuation
- Power measurements
- Serial interface logging and writing
- Voltage control to simulate e.g. battery depletion

### **2.3.3 Indriya2**

Indriya2 [3] is a three-dimensional wireless sensor network deployed across three floors of the School of Computing , at the National University of Singapore (NUS). The Testbed facilitates research in sensor network programming environments, communication protocols, system design, and applications. It provides a public, permanent framework for development and testing of sensor network protocols and applications. Users can interact with the Testbed through an intuitive web-based interface designed based on Harvard's Motelab's interface. Registered users can upload executables, associate those executables with motes to create a job, and schedule the job to be run on Testbed. During the job execution, all messages and other data are logged to a database which is presented to the user upon job completion and then can be used for processing and visualization.

## **2.4 Development Tools For Batteryless Devices**

### **2.4.1 Ekho**

To counter the issue of randomness in a energy harvesting power source, Ekho [7] has been developed. This an emulator capable of accurately recreating harvesting conditions in a lab. It reproduces the I-V characteristics of energy harvesting sources, allowing developers to choose from a library of energy traces recorded with various sources and environmental conditions.



### 2.4.2 Flicker

Flicker [8] is a platform for quickly prototyping batteryless embedded sensors. Flicker is an extensible, modular, plug and play architecture that supports RFID, solar, and kinetic energy harvesting; passive and active wireless communication; and a wide range of sensors through common peripheral and harvester interconnects. Flicker supports recent advances in failure-tolerant timekeeping, testing, and debugging, while providing dynamic federated energy storage where peripheral priorities and user tasks can be adjusted without hardware changes.

### 2.4.3 Energy aware debugger

The Energy-Interference-Free Debugger (EDB) [4], is a tool for monitoring and debugging of intermittent systems without adversely affecting their energy state. EDB recreates a familiar debugging environment for intermittent software and augments it with debugging primitives for effective diagnosis of intermittence bugs.

## 2.5 Contribution

The contribution of this thesis is to build a remote accessible testbed, making use of existing tools and platforms. It would be nice if I could re-use the backed server of one of the for mentioned WSNs, because this would require a lot of engineering to do this myself. Flicker would be an ideal platform to use as device under test (DUT), because it supports many peripherals which are software configurable and has the MSP430 as its core, a common micro controller in low-power applications.

Several methods can be used to track the progress and outcome of a test: serial console (printf), GPIO tracing (logic analyzer) and a debugger. Perhaps the energy aware debugger which has some nice features for intermittent devices.

The architecture is shown if Figure 2.1

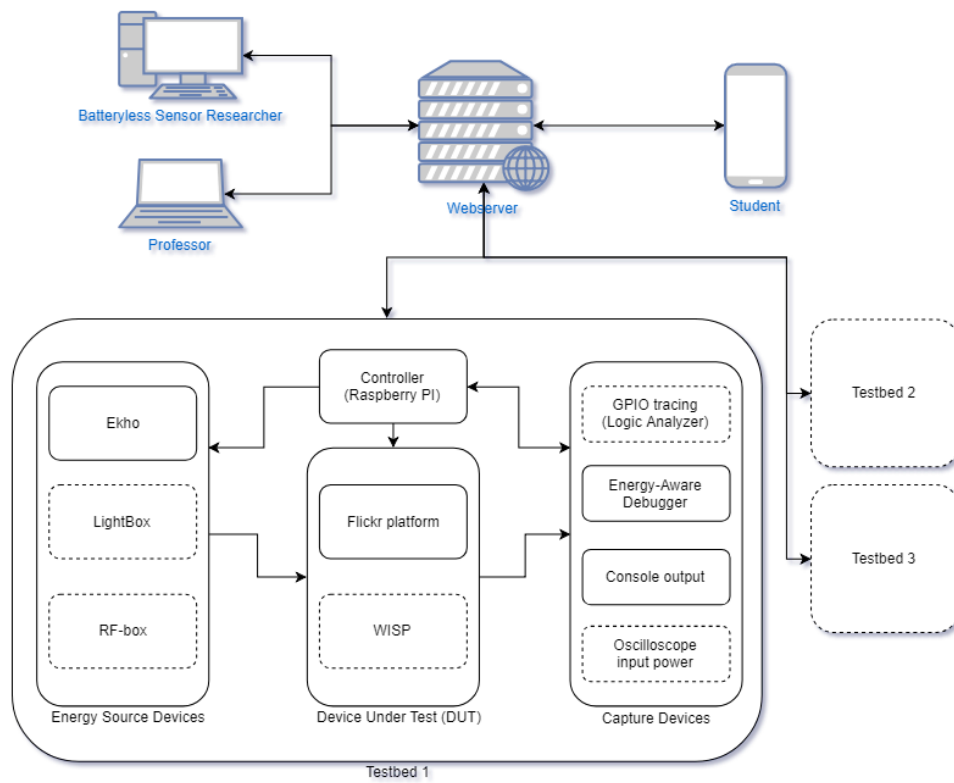


Figure 2.1: Testbed architecture

# Bibliography

- [1] Henko Aantjes, Amjad Yousef Majid, and Przemyslaw Pawelczak. A testbed for transiently powered computers. *CoRR*, abs/1606.07623, 2016.
- [2] C. Adjih, E. Baccelli, E. Fleury, G. Harter, N. Mitton, T. Noel, R. Pissard-Gibollet, F. Saint-Marcel, G. Schreiner, J. Vandaele, and T. Watteyne. Fit iot-lab: A large scale open experimental iot testbed. In *2015 IEEE 2nd World Forum on Internet of Things (WF-IoT)*, pages 459–464, Dec 2015.
- [3] Paramasiven Appavoo, Ebram Kamal William, Mun Choon Chan, and Mobashir Mohammad. Indriya2: A heterogeneous wireless sensor network (wsn) testbed”. In Honghao Gao, Yuyu Yin, Xiaoxian Yang, and Huaikou Miao, editors, *Testbeds and Research Infrastructures for the Development of Networks and Communications*”, pages 3–19, Cham, 2019. Springer International Publishing.
- [4] A. Colin, G. Harvey, A. P. Sample, and B. Lucia. An energy-aware debugger for intermittently powered systems. *IEEE Micro*, 37(3):116–125, 2017.
- [5] Alexei Colin, Emily Ruppel, and Brandon Lucia. A reconfigurable energy storage architecture for energy-harvesting devices. In *Proceedings of the Twenty-Third International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 767–781. ACM, 2018.
- [6] Francesco Fraternali, Bharathan Balaji, Yuvraj Agarwal, Luca Benini, and Rajesh Gupta. Pible: battery-free mote for perpetual indoor ble applications. In *Proceedings of the 5th Conference on Systems for Built Environments*, pages 168–171. ACM, 2018.
- [7] Josiah Hester, Lanny Sitanayah, Timothy Scott, and Jacob Sorber. Realistic and repeatable emulation of energy harvesting environments. *ACM Trans. Sen. Netw.*, 13(2):16:1–16:33, Apr. 2017.
- [8] Josiah Hester and Jacob Sorber. Flicker: Rapid prototyping for the batteryless internet-of-things. In *Proceedings of the 15th ACM Conference on Embedded Network Sensor Systems*, SenSys ’17, pages 19:1–19:13, New York, NY, USA, 2017. ACM.
- [9] R. Lim, F. Ferrari, M. Zimmerling, C. Walser, P. Sommer, and J. Beutel. Flocklab: A testbed for distributed, synchronized tracing and profiling of wireless embedded systems. In *2013 ACM/IEEE International Conference on Information Processing in Sensor Networks (IPSN)*, pages 153–165, April 2013.
- [10] Alanson P Sample, Daniel J Yeager, Pauline S Powledge, Alexander V Mamishev, Joshua R Smith, et al. Design of an rfid-based battery-free programmable sensing platform. *IEEE transactions on instrumentation and measurement*, 57(11):2608, 2008.

- [11] Farah Yahya, Christopher J Lukas, Jacob Breiholz, Abhishek Roy, Harsh N Patel, NingXi Liu, Xing Chen, Avish Kosari, Shuo Li, Divya Akella, et al. A battery-less 507nw soc with integrated platform power manager and sip interfaces. In *VLSI Circuits, 2017 Symposium on*, pages C338–C339. IEEE, 2017.
- [12] Hong Zhang, Jeremy Gummeson, Benjamin Ransford, and Kevin Fu. Moo: A batteryless computational rfid and sensing platform. *University of Massachusetts Computer Science Technical Report UM-CS-2011-020*, 2011.