GreenSA power-state model

PE compute logic and the two weight banks are controlled independently

PE logic: one state machine per PE

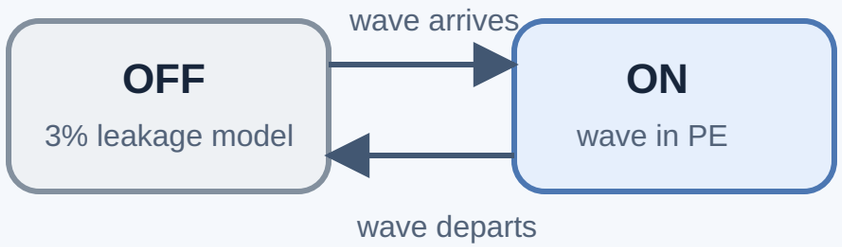

- 1 modeled leading PE wake cycle
- ReGate: no minimum OFF lockout
- GreenSA: separated-wave OFF interval at least 48 cycles

Each weight bank: separate state machine

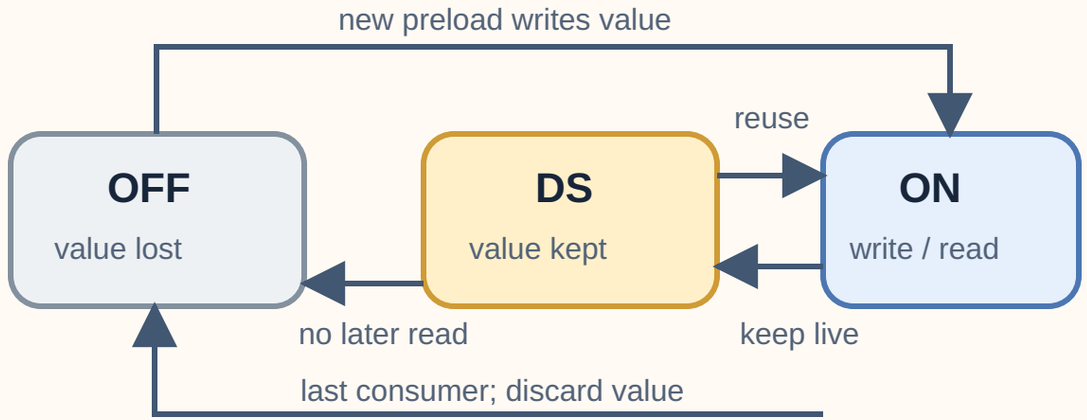

Bank 0 and bank 1 may occupy different states.

DS leakage ratio: 0.42 of ON (Slumber parameter).

DS wake latency is assumed covered by the PE wake.

An OFF bank needs a new preload before its value can be used. A DS bank preserves its loaded value for later GEMM reuse.

These are architecture and energy-model states; this figure does not claim measured voltage-switch timing or a fabricated circuit.