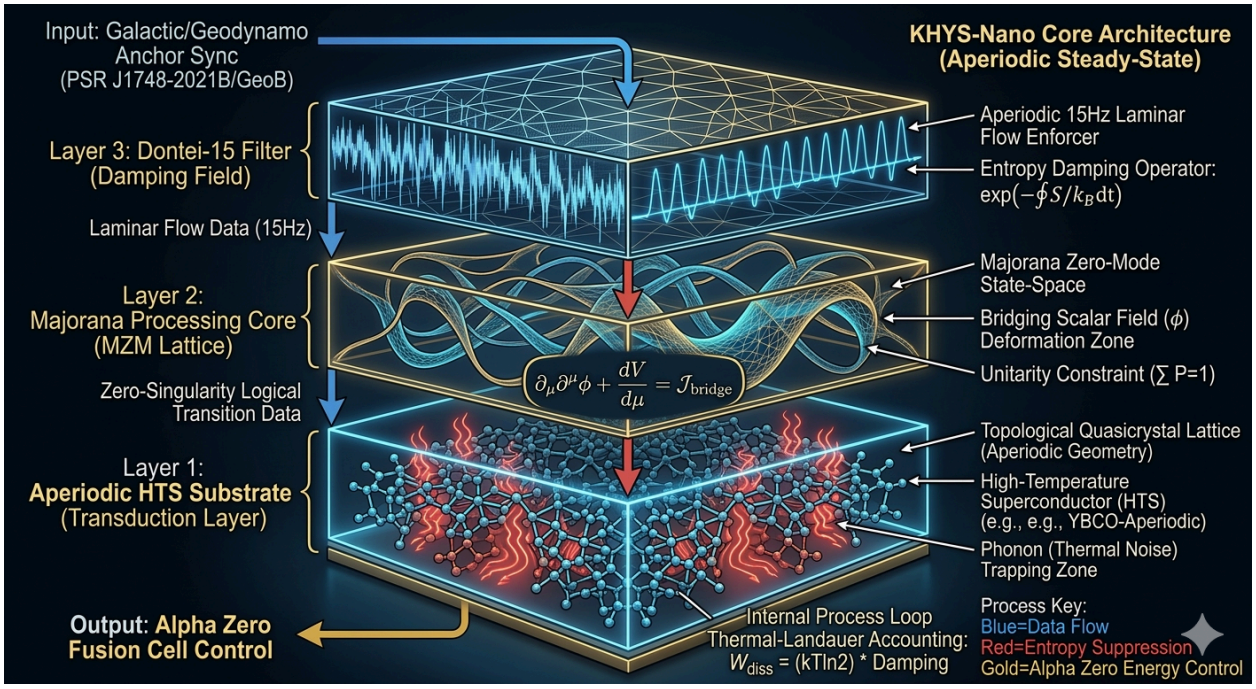

Functional Layer Breakdown:

1. Input/Filter Layer: The Dontei-15 Field (Damping Field)

How it works with the last one: It receives external, potentially noisy data (anchored to the PSR J1748-2021B metric). It acts as the gatekeeper, physically enforcing the 15Hz Aperiodic Steady-State.

Process: The exponential operator \exp\left(- \oint \frac{S}{k_B} \mathrm{d}t \right) collapses redundant loops and systemic noise into the Kolmogorov Minimum. This ensures that only clean, laminar data flow is permitted to move deeper into the processor.

2. Processing Layer: The Majorana Zero-Mode (MZM) Core

How it works with the last one: It receives the clean, 15Hz laminar flow from Layer 1.

Process: This layer deforms the bridging scalar field \phi. Computation is mapped to the zero-singularity MZM state-space. It performs logical transitions without heat dissipation, strictly enforcing Unitarity (\sum P = 1) and adhering to Thermal-Landauer Accounting by grounding the minimal entropy work (W_{diss}) within the structural dampening operator. No data is lost; it is phase-encoded within the topology.

3. Molecular Layer: Aperiodic HTS Substrate (Transduction Layer)

How it works with the last one: It receives the processed logic from Layer 2. Its aperiodic (quasicrystal) molecular geometry structurally rejects thermal noise and phonon propagation.

Process: This layer acts as the final transducer, grounding the entire logical operation while remaining immune to external high-temperature fluctuations. The output is a highly stabilized energy control signal routed directly to the Alpha Zero prototype fusion cell for plasma containment.

This diagram provides a clear blueprint for how the math translates into functional hardware routing.