


SOLID BAMBOO FLOORING

ECO PREMIUM MOSO BAMBOO FLOORING




Solid bamboo flooring is exactly how it sounds: solid. This style of flooring will give you the most natural, rustic look of the plant, as the interesting grains and patterns will stand out along the flooring surface. Solid bamboo flooring visualizations spotless stability, chick lines, and critical simplicity create this magnificent flooring as one of terrific design idea.

Product Photos

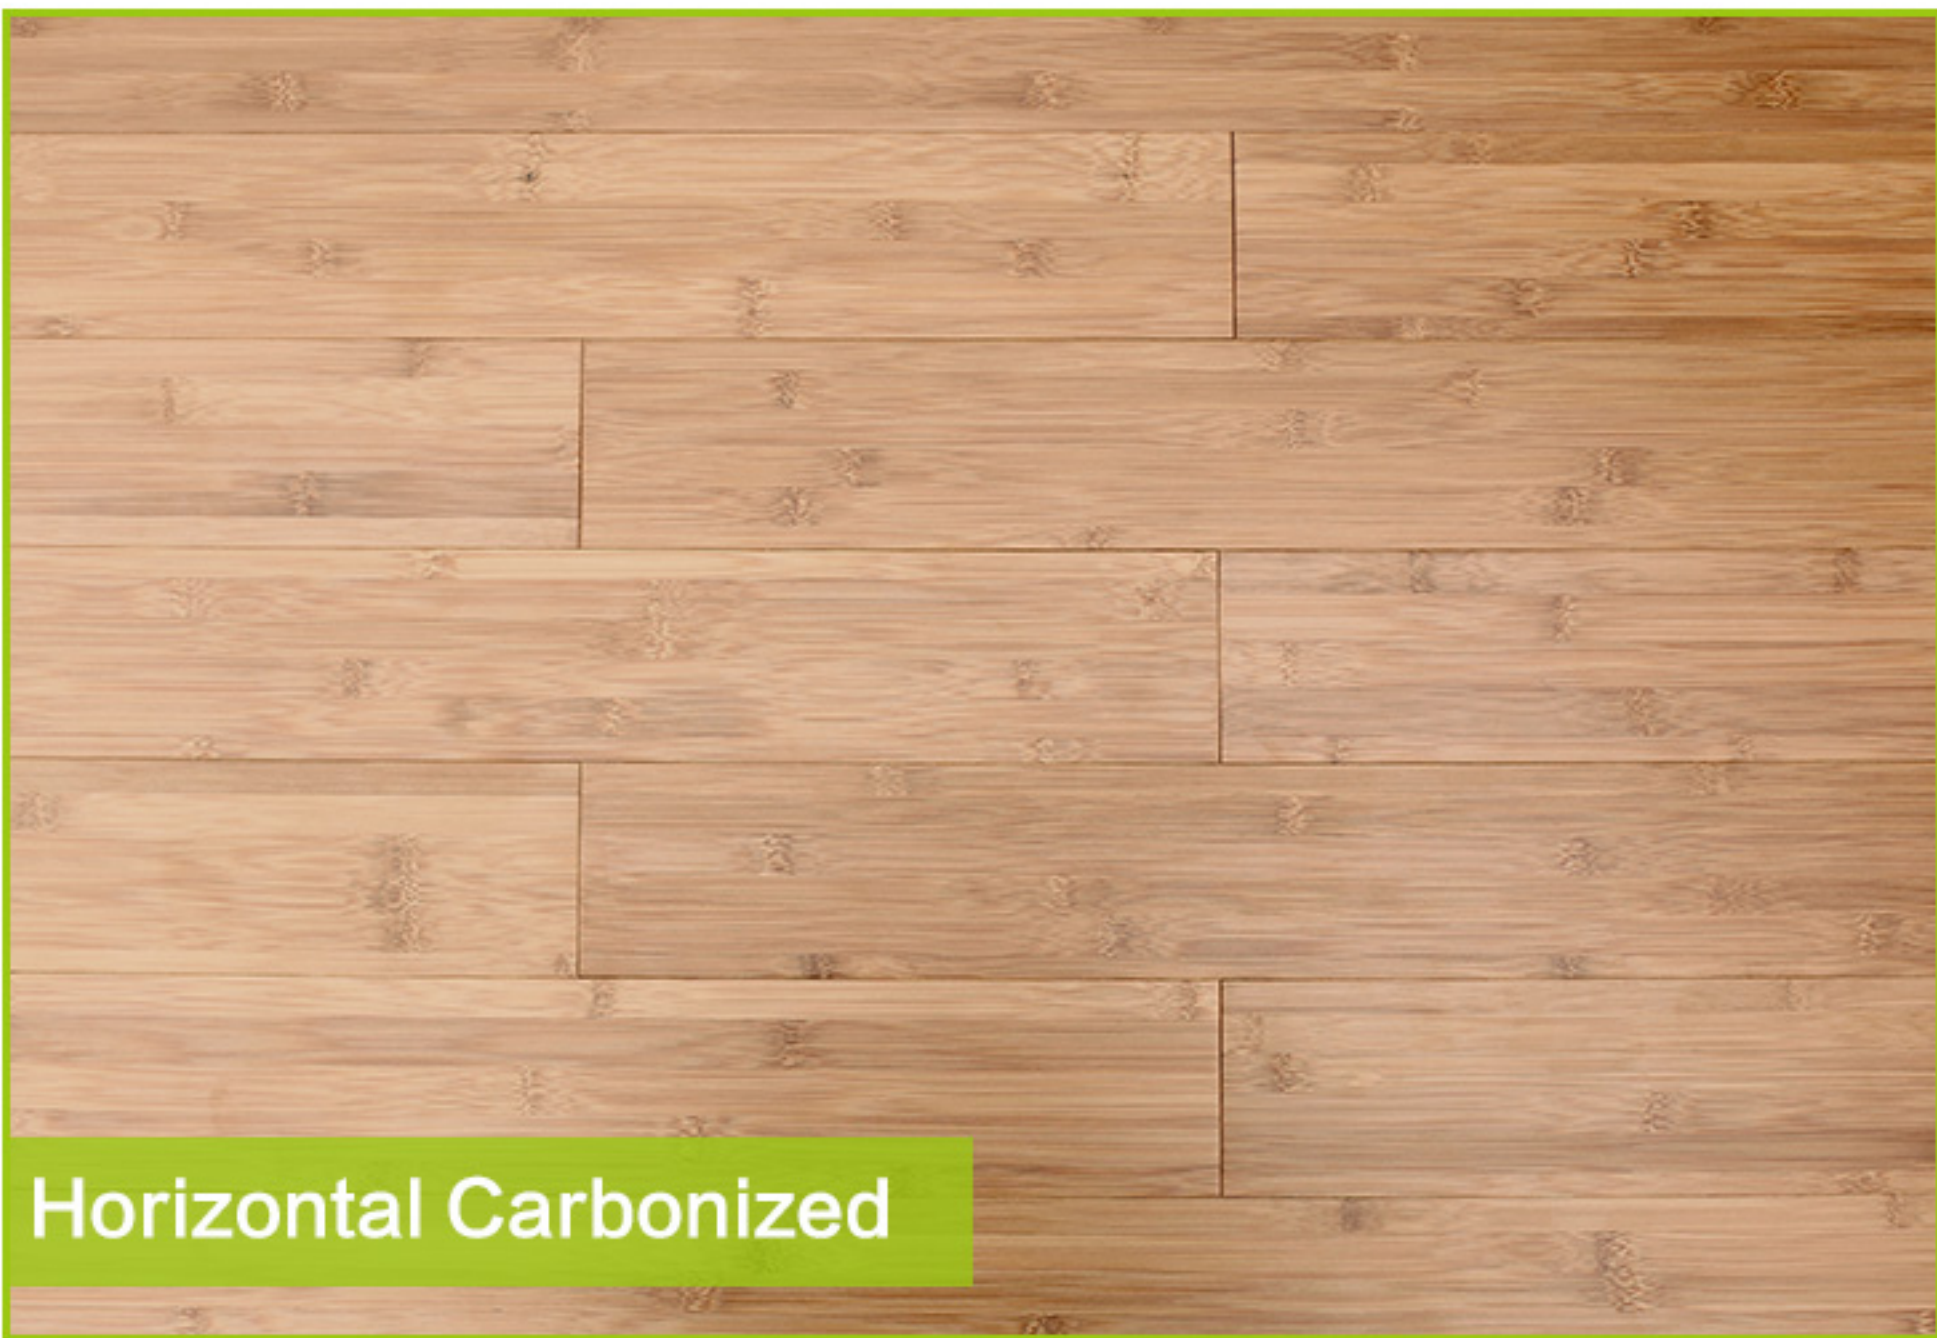


Horizontal Carbonized

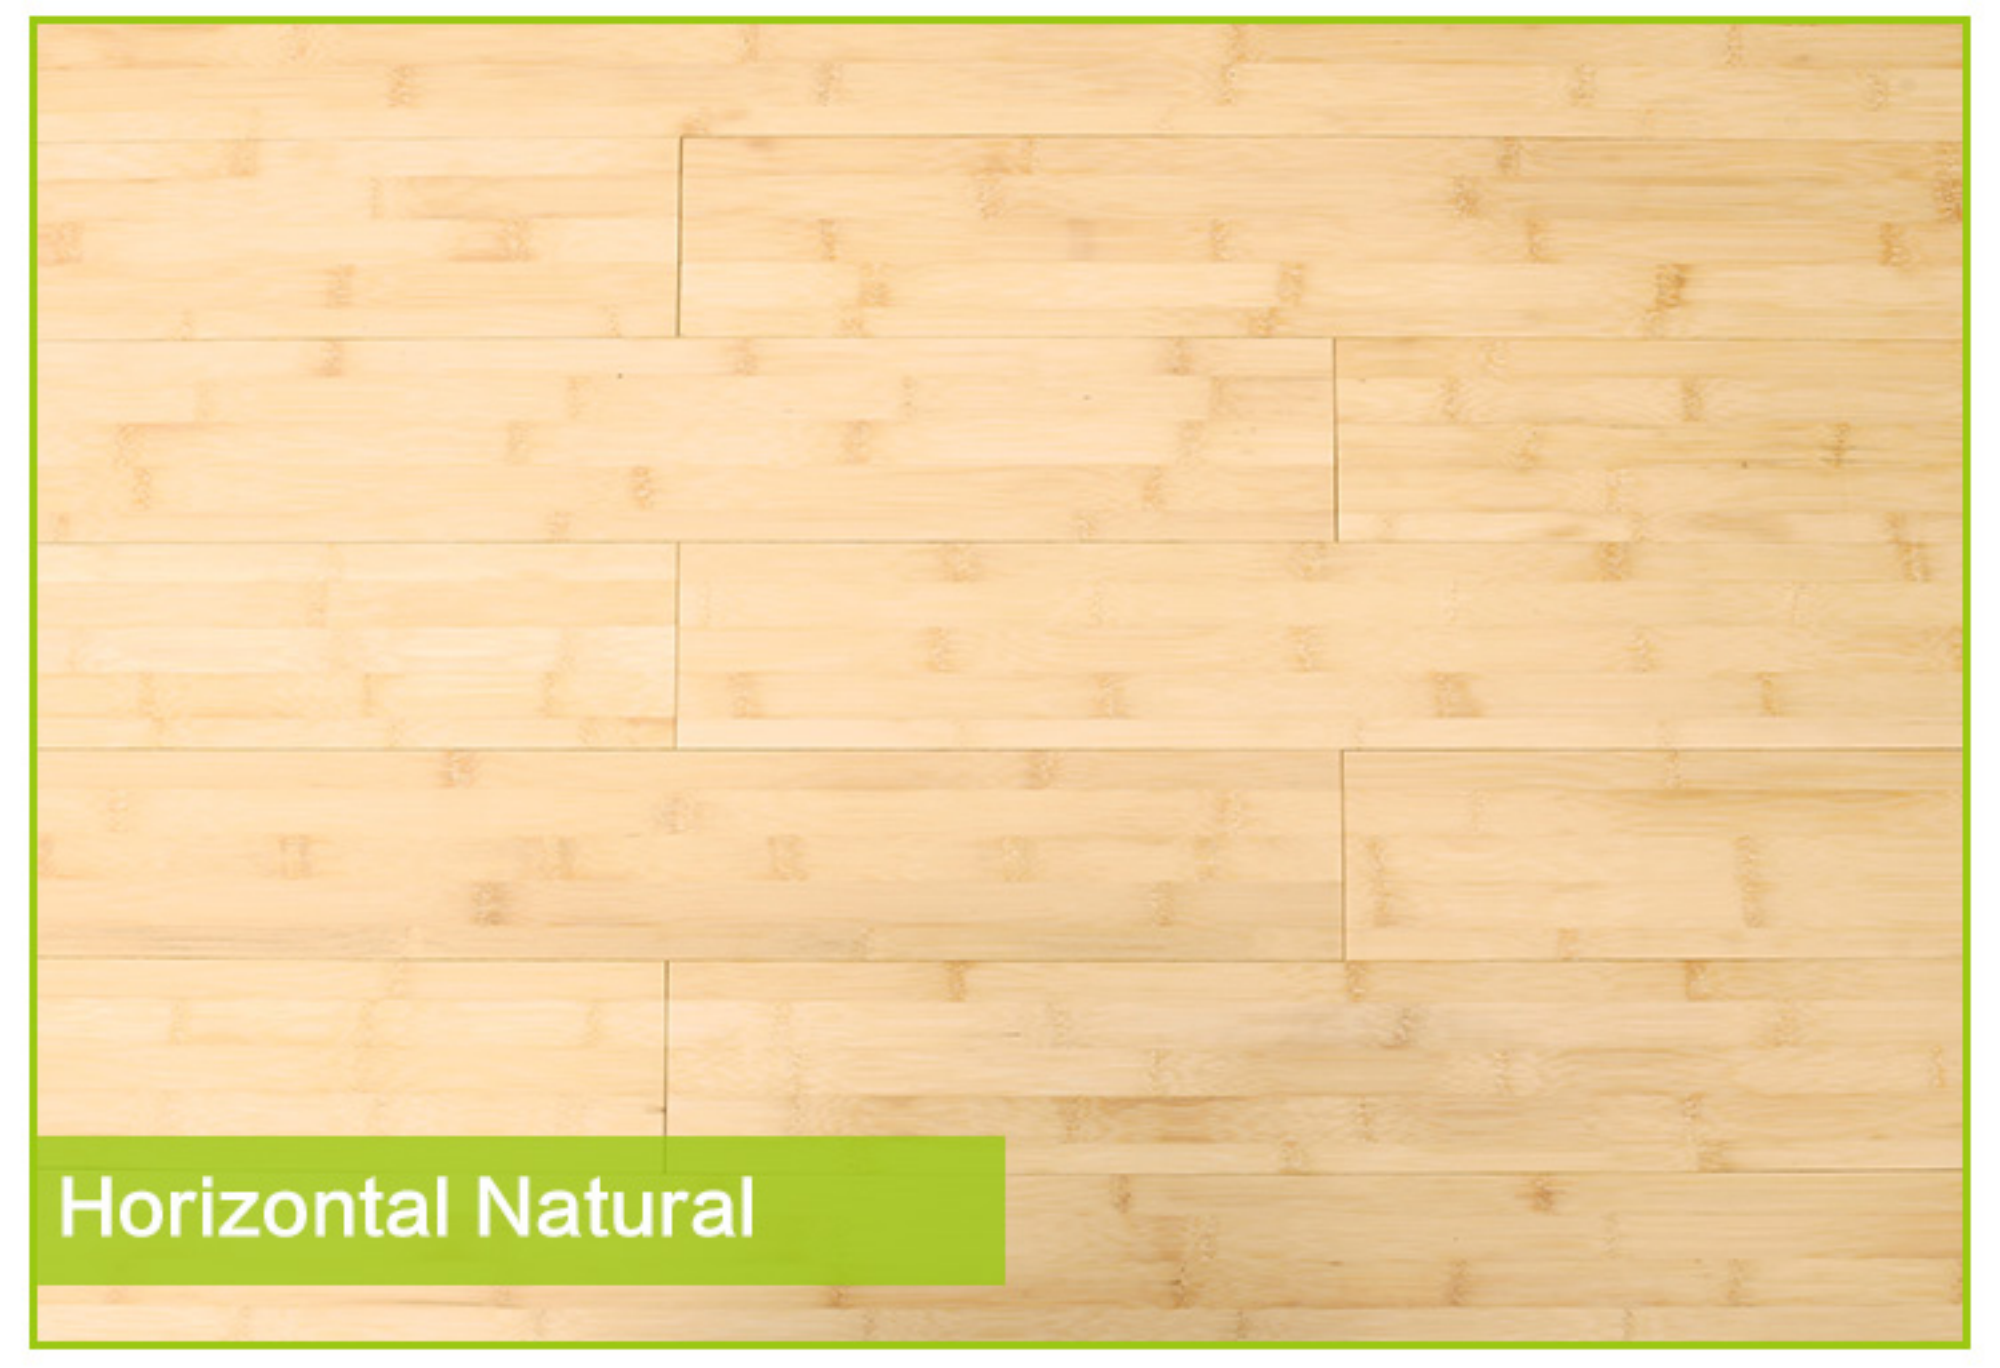The image features a background of horizontal wood planks with a natural, light brown finish and visible grain patterns. A solid green rectangular overlay is positioned in the bottom-left corner, containing the text "Horizontal Natural" in white.

Horizontal Natural



Vertical Carbonized

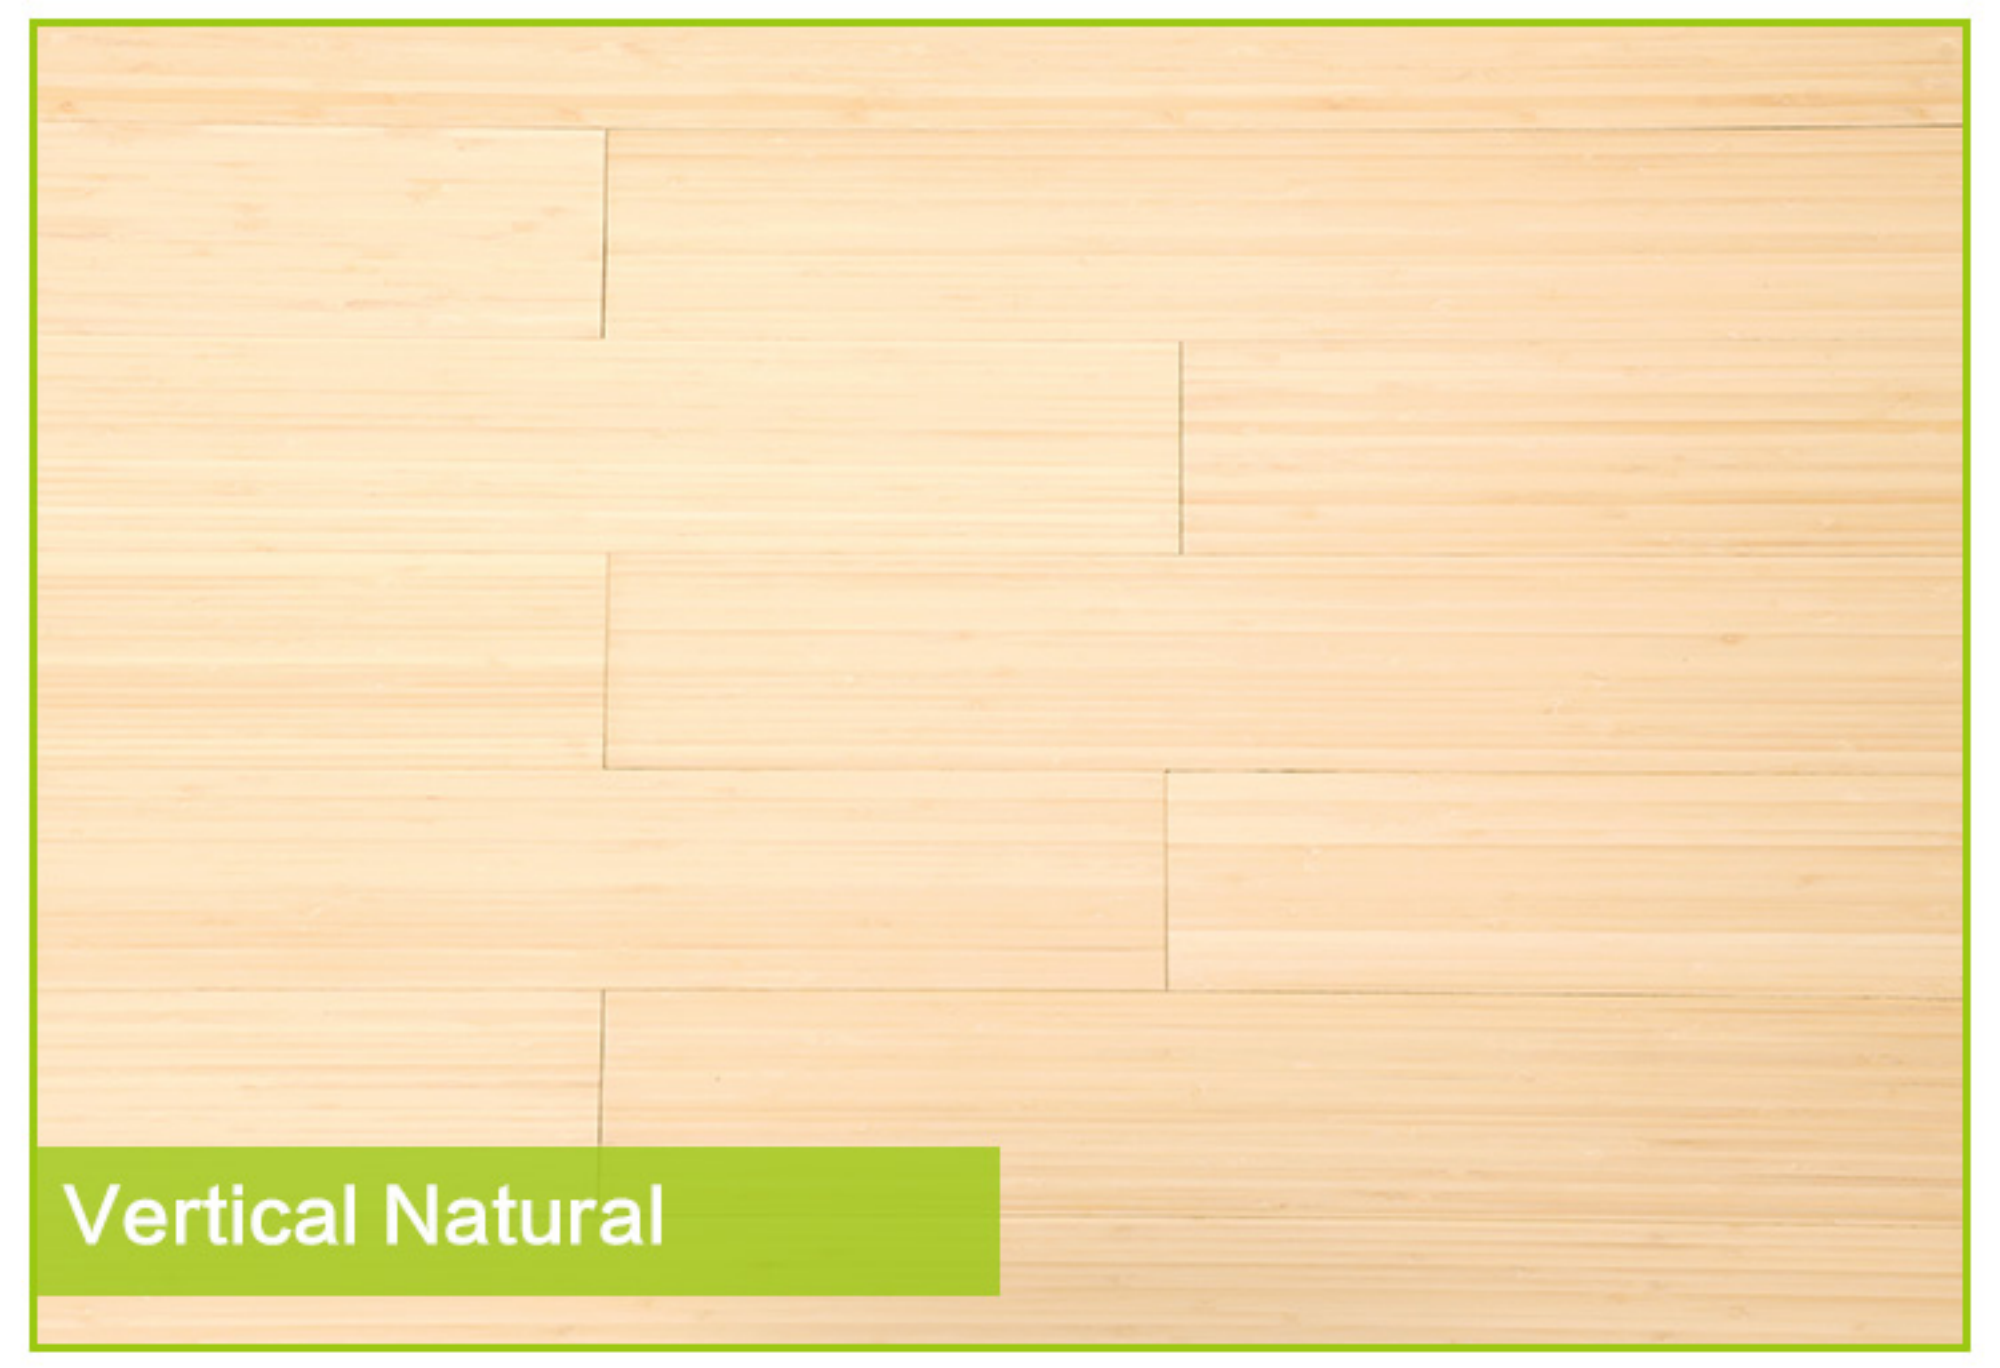

Vertical Natural

A close-up photograph of horizontal carbonized bamboo flooring. The planks are arranged in a staggered pattern, showing a warm, golden-brown color with a fine, linear grain texture. The lighting is even, highlighting the natural variations in the bamboo material.

Horizontal Carbonized



Dining Hall: Strongest Flooring



Office: Premium Bamboo



Living Room: Extreme Hardness



Bedroom: Radiant Heat



Living Room: Amazing Bamboo

Solid Bamboo Flooring Features




Environmentally Friendly

Environmentally Friendly - Solid flooring construction, made from 100% rapidly renewable and sustainable Moso bamboo which is one of the fastest-growing plants in the world. Bamboo can be harvested for flooring production after just four or five years. Bamboo qualifies for 2 LEED credits.

Indoor Air Quality

Extremely low emission levels, lower than WHO (World Health Organization) and CARB (California Air Resources Board) standards. LEED (Leadership in Energy and Environmental Design) and GECA (Good Environmental Choice Award) accredited. (0.05ppm, E1).

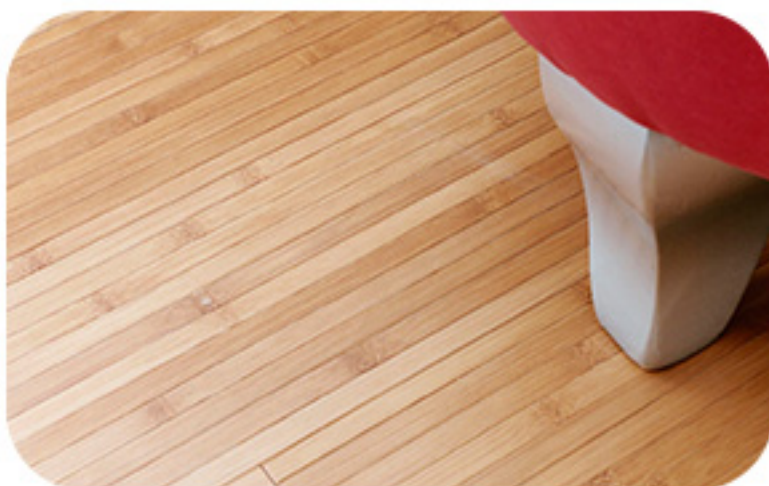


Coating

Ten stage Klumpp coating system with 'Anti-Scratch' finish utilizing the latest scratch resistant technology combined with an advanced co-polymer primer for optimum finish adhesion. (5H scratch resistant, 5B cross hatch adhesion).

Tough & Durable

Bamboo looks like wood, feels like wood, and cuts like wood. It even smells like wood. Horizontal bamboo and vertical bamboo have Janka rating of 7.5, oak has Janka rating of 5.5, Ipe has Janka rating of 16.2.

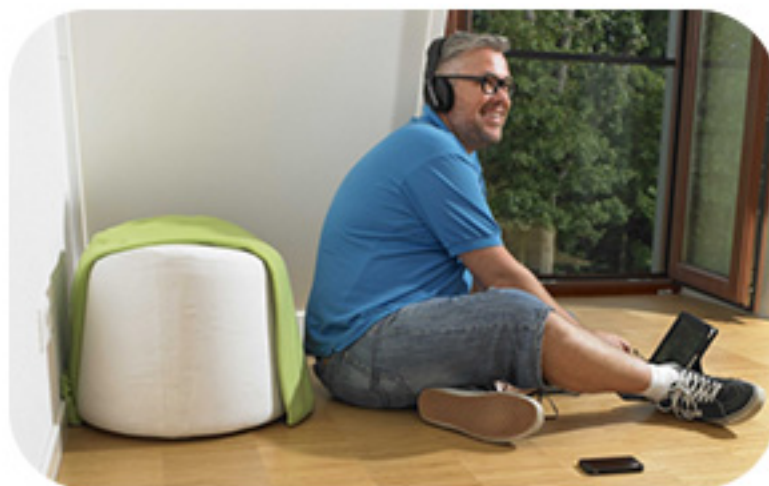

Production Process

Mature Technology

Advanced Equipment

Guaranteed Quality



Stocking Raw Bamboo Poles



Cutting Bamboo Poles into Stalks



Splitting Stalks into Bamboo Strips



Drying Bamboo Strips



Carbonizing Bamboo Strips



Flattening Bamboo Strips




Pressing Bamboo Strips into Plank



Conditioning Bamboo Flooring Plank



Sanding Bamboo Flooring Plank

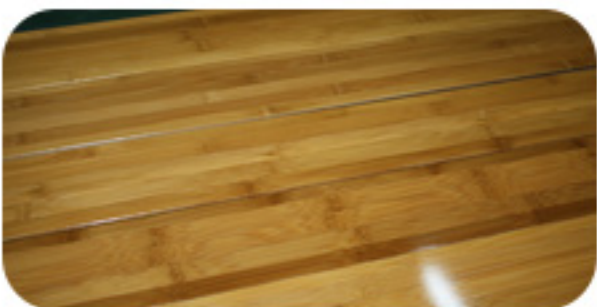

Bamboo Flooring Ready



Lacquering Bamboo Flooring Plank



Milling Tongue & Groove



Sorting Bamboo Flooring Color



Packing Bamboo Flooring




Loading into Container

Technical Data

Hardness	4.0 N / mm ² (Brinell)
Shrink / swell	0.14% per 1% change in moisture content
Equilibrium MC	10% at 20° C and 65% Rel. Air Humidity
	8% at 20° C and 50% Rel. Air Humidity
Density	750 kg / m ³
Fire resistance	B1; Swiss Norm CH 5,3; Brit Norm BS 476 part 7
Thermal conductivity	0.17 W (m · K)
Thermal resistance	0.08 m ² · K / W
Emission standard	0.01 mg / m ³ (E1 norm: max. 0.124 mg / m ³)

Paint Technology

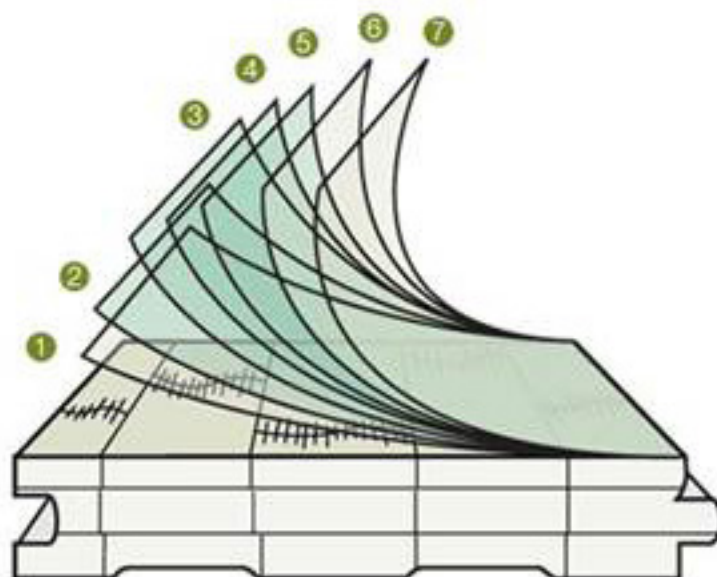

Layer	Commodity	Weight
1	UV Primer	10 - 15 g / m ²
2	UV Putty	15 - 20 g / m ²
3	Anti-Brasive	15 - 20 g / m ²
4	Anti-Brasive	15 - 20 g / m ²
5	Duro-Sealer	15 - 20 g / m ²
6	Antiscratch	4 - 6 g / m ²
7	Antiscratch	4 - 6 g / m ²

Testing Results

Flooring Test

Testing Items	Reports
Rigidity (Mpa)	104
Intensity of static curve (Mpa)	176.3
Average Density (g / cm ³)	1.05
Impact Tenacity (KJ / m ²)	114.7
Free Formaldehyde Emission (g / cm ³)	0.125
Moisture Content	6-10%
Water Absorbing Expanding per 24h	0.40%

Finishing Test

Test	Classification
Gloss Value	according to samples
Inflammability	B1
Pendular Hardness on Gloss	minimum ca.100swings
Chemical Resistance	1B
UV Coating	1200-1700 cycles
Scratch Resistance	4C
Heat Test	120 degrees
Cross Cut Test	GT0
Coefficient of friction	0.3-0.5

About Company

Bothbest is a FSC certified bamboo company based in China, manufacturing bamboo since 2001, selling bamboo world widely, gaining a good reputation, providing one-stop purchasing service of bamboo, from indoor to outdoor, from ground to ceiling.

Bothbest has been recognized as reliable, trustable, preferred bamboo supplier and is pleased to work with importers, distributors, designers, architects, contractors and builders from all over the world.

Bamboo is considered as sustainable and renewable resource due to the plant 's rapid growth. As a grass, bamboo is mature and ready to be harvested in 4-6 years compared to hardwood which requires 25 years to grow. Bamboo can grow as much as 24 inches in 24 hours.

Bothbest is an experienced and helpful flooring expert, providing quality guaranteed bamboo products and outstanding customer service. You save by buying direct from the manufacturer.



Certificate



ISO14001



CE



FSC



ISO9001



TESTING REPORT



TESTING REPORT