

OUR PRODUCTS SHOW



20mm HORIZONTAL CARBONIZED BAMBOO PANEL



Sustainability

The fastest growing plant on Earth, it can be harvested every 3-7 years



Strength


than any traditional hardwood and even many alloys of steel.



Green

Green is great, when up against other timbers, bamboo shoots above and beyond

Bamboo panels have gained a lot of attention recently, especially among green building professionals and architects. Bamboo panels are multi-purpose building and decoration material because they are environmentally green, easy to mill, stable structure, adjustable dimension, consistent top quality, making it ideal for a wide range of uses including countertops, cabinets, desks, shelving, architectural panels, and much more.

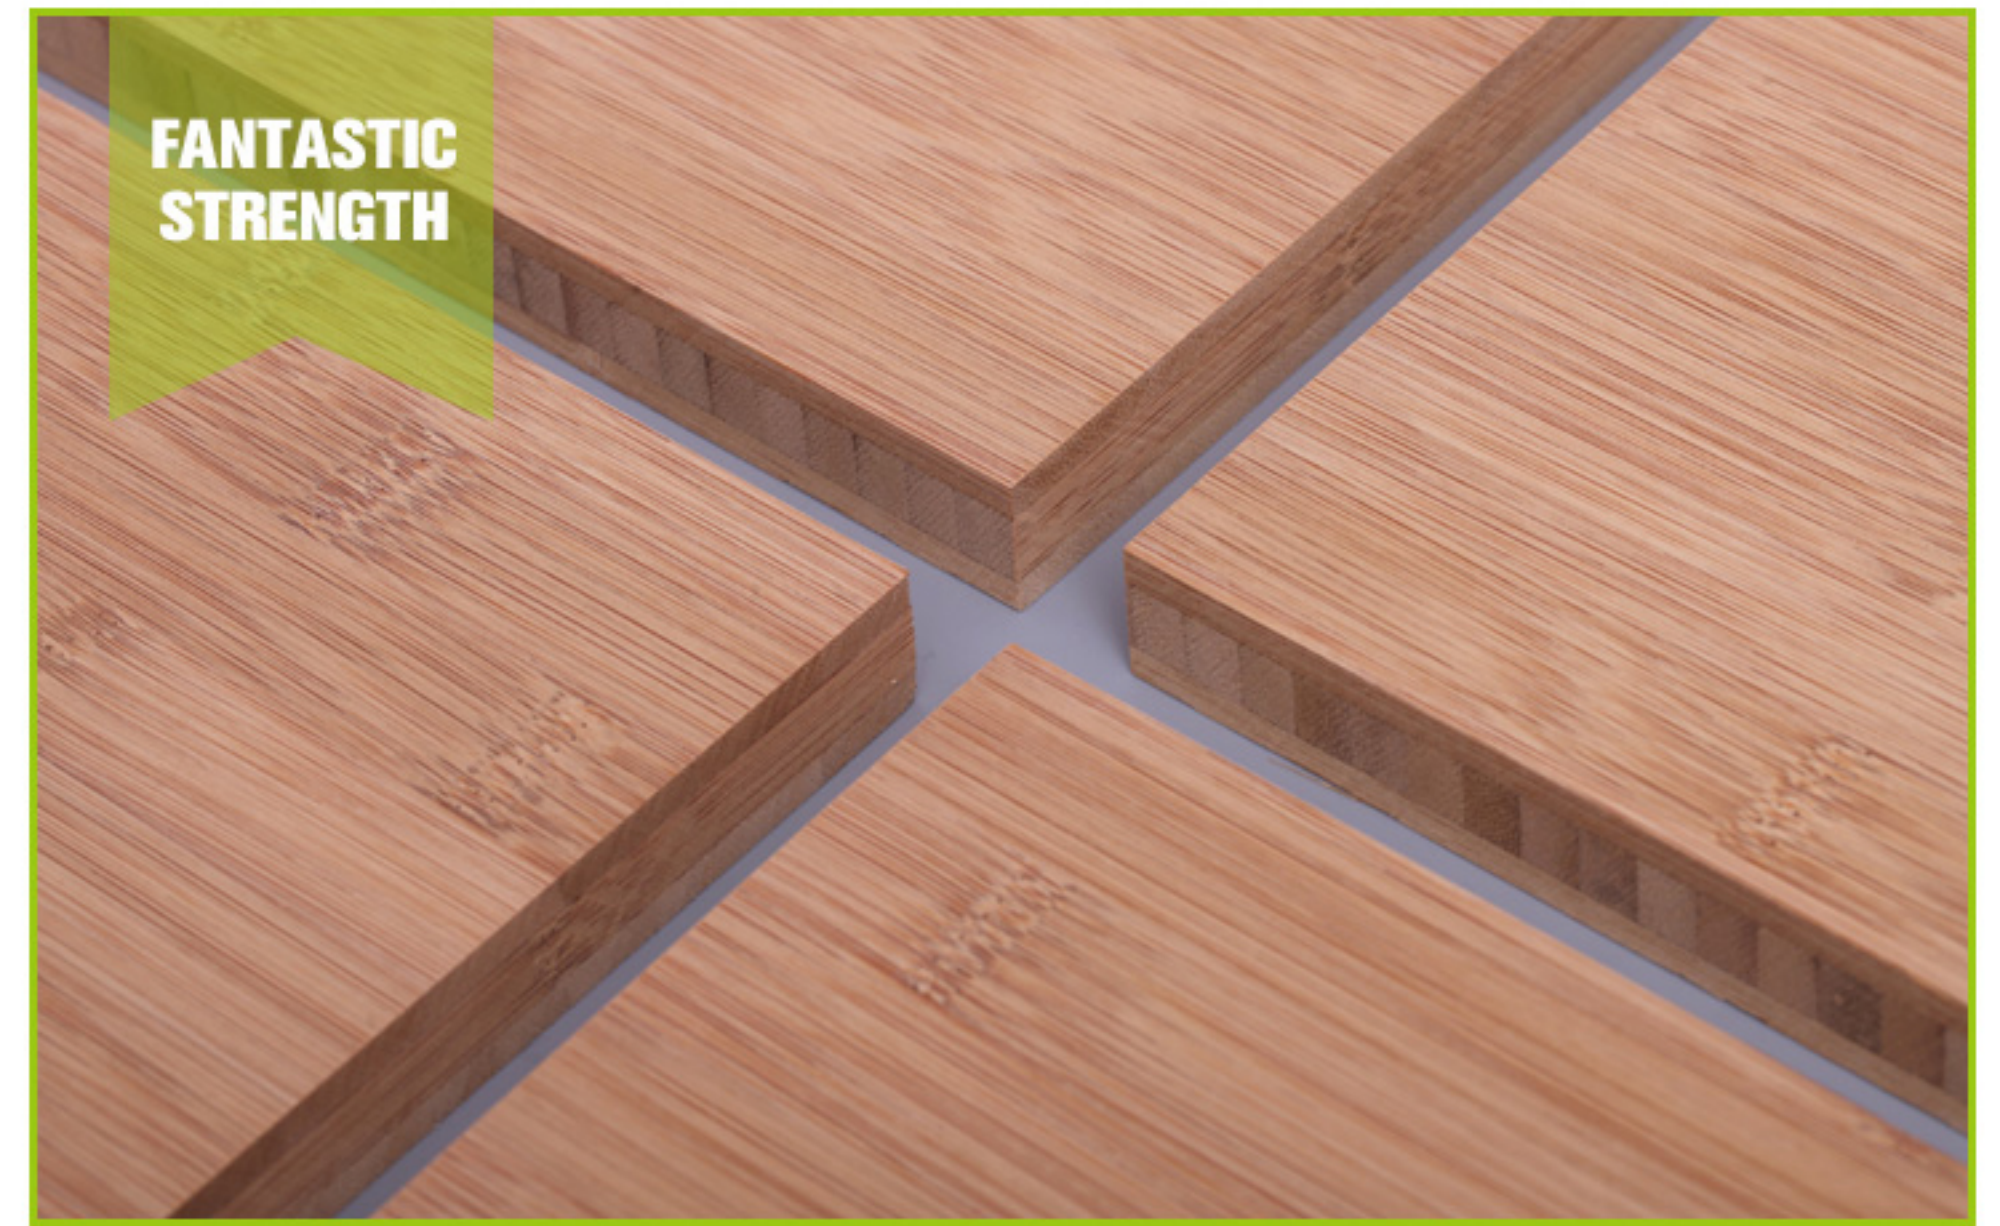

**FANTASTIC
STRENGTH**



**EXOTIC
BEAUTY**

**FANTASTIC
STRENGTH**



**EXOTIC
BEAUTY**



Four bamboo planks are arranged in a cross pattern on a light gray background. The planks are light brown with a visible vertical grain. The central intersection of the planks is clearly visible, showing the layered structure of the bamboo. A green diagonal banner is in the top-left corner.

**FANTASTIC
STRENGTH**

A single bamboo plank is shown at an angle on a light gray background. The plank's surface shows a fine, vertical grain pattern. The edges of the plank are smooth and well-defined. A green diagonal banner is in the top-left corner.

**EXOTIC
BEAUTY**

Four rectangular bamboo planks are arranged in a star pattern on a grey background. Each plank shows its natural light tan color and fine vertical grain. The edges of the planks reveal the internal structure of the bamboo, which consists of alternating layers of dense and less dense material.

**FANTASTIC
STRENGTH**

A single, large rectangular bamboo plank is shown at an angle on a grey background. The plank's surface is smooth and displays a consistent vertical grain pattern. The side of the plank shows the characteristic layered structure of bamboo.

**EXOTIC
BEAUTY**

PRODUCT GALLERY



Renewable Material: 100% Green Bamboo



Functional Application: Eco, Strong, Hard



Flexible Dimensions: Custom Sizes Accepted



Exciting Look: Unique Fantastic Appearance



Multiple Uses: Furniture, Kitchen, Decoration

PRODUCTION PROCESS

Full Dimensions

Custom Made

Delivery Guarantee




Raw Material Bamboo Stalks:
Green & Renewable



Splitting Bamboo Stalks
into Bamboo Strips



Flattening Bamboo Strips:
Flat & Smooth

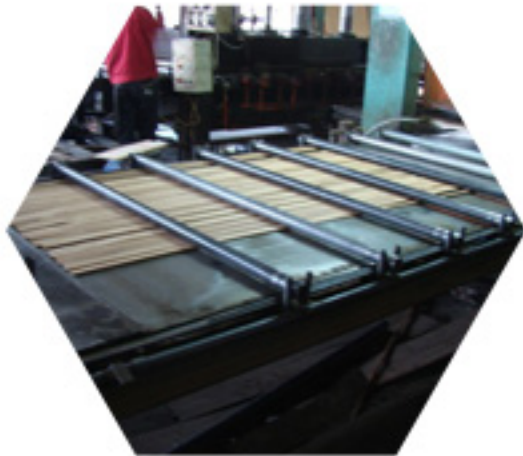

Stocking Bamboo Strips:
Dry &



Selecting Bamboo Strips:
Even Color &



Pressing Bamboo Strips:
Single Layer



Laminating Multiple Layers



Bamboo Panels Surface:
Repairing & Sanding



Final Bamboo Panels

BAMBOO PANELS FEATURES



Unique Look

The tight, linear grain of bamboo panels make for a very sleek and contemporary finishing material and the edge grain of multi layers bamboo panels gives a unique look that cannot be achieved with regular wood veneered products.

Environmentally Healthy Panel

Bamboo holds the promise of a sustainable cost effective and ecologically responsible alternative to the wide spread clear cutting of our world's forests. Bamboo strips are glued with a urea-formaldehyde (UF) adhesive which emits very low volatile organic compound (VOC).



Creative Applications

Bamboo panel is a truly green and environmental material for building the house, making the furniture: door, cabinet, kitchen etc., milling the stairs, creating new, unique and fabulous bamboos with panels distinct advantages: stable structure, superior density, elegant colors, easy processing and adjustable dimensions.

BAMBOO PANEL SPECIFICATION

Thickness	Grain Available	Color Available	Layers Available	Maximum Length	Maximum Width
5mm	H / V	N / C	1	4000mm	1220mm
6mm	H / V	N / C	1, 3	4000mm	1220mm
10mm	H	N / C	2	4000mm	1220mm
10mm	V	N / C	1	4000mm	1220mm
12mm	H / V	N / C	3	4000mm	1220mm
15mm	H / V	N / C	1, 3	4000mm	1220mm
20mm	H	N / C	3	4000mm	1220mm
20mm	V	N / C	1, 3	4000mm	1220mm
25mm	H / V	N / C	3	4000mm	1220mm
30mm	H / V	N / C	3	4000mm	1220mm
35mm	H / V	N / C	3	4000mm	1220mm
40mm	H / V	N / C	5	4000mm	1220mm

H: HORIZONTAL

V: VERTICAL

N: NATURAL

C: CARBONIZED

TECHNICAL DATA

Hardness	4.0 N / mm ² (Brinell)
Shrink / swell	0.14% per 1% change in moisture content
Equilibrium MC	10% at 20° C and 65% Rel. Air Humidity
	8% at 20° C and 50% Rel. Air Humidity
Density	750 kg / m ³
Glue	MDI glue
Fire resistance	B1; Swiss Norm CH 5,3; Brit Norm BS 476 part 7
	Class C _{FL} s1 according to EN13501-1°
Emission standard	0.01 mg / m ³ (E1 norm: max. 0.124 mg / m ³)

CERTIFICATE

