

DRIP  
Internet-Draft  
Updates: 7401, 7343 (if approved)  
Intended status: Standards Track  
Expires: 2 October 2022

R. Moskowitz  
HTT Consulting  
S. Card  
A. Wiethuechter  
AX Enterprize, LLC  
A. Gurtov  
Linköping University  
31 March 2022

DRIP Entity Tag (DET) for Unmanned Aircraft System Remote Identification  
(UAS RID)  
draft-ietf-drip-rid-18

## Abstract

This document describes the use of Hierarchical Host Identity Tags (HHITs), updating both ~~to RFC 7401~~ and ~~to RFC 7343~~, as self-asserting IPv6 addresses and thereby a trustable identifier for use as the Unmanned Aircraft System Remote Identification and tracking (UAS RID). Within the context of RID, HHITs ~~will be~~ called DRIP Entity Tags (DETs). HHITs self-attest to the included explicit hierarchy that provides Registrar discovery for 3rd-party identifier attestation.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 2 October 2022.

## Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

**Commenté [BMI1]:** Citations are to be avoided in Abstracts

**Commenté [BMI2]:** I suggest to move this text into a separate para that says how these RFCs are updated:

"This document updates RFC7401 by XXX. Also, it updates RFC 7343 by XX."

**Commenté [BMI3]:** As per rfc7322, the abstract should be:

"Similarly, the Abstract should be complete in itself. It will appear in isolation in publication announcements and in the online index of RFCs. Therefore, the Abstract must not contain citations."

Not sure the mention of "Registrar" is useful absent a definition of what that registrar is about (EPP, etc.).

I tend to suggest to simply delete this sentence.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction . . . . .	3
2. Terms and Definitions . . . . .	4
2.1. Requirements Terminology . . . . .	4
2.2. Notations . . . . .	4
2.3. Definitions . . . . .	4
3. The Hierarchical Host Identity Tag (HHIT) . . . . .	5
3.1. HHIT Prefix for RID Purposes . . . . .	6
3.2. HHIT Suite IDs . . . . .	7
3.2.1. HDA custom HIT Suite IDs . . . . .	7
3.3. The Hierarchy ID (HID) . . . . .	8
3.3.1. The Registered Assigning Authority (RAA) . . . . .	8
3.3.2. The Hierarchical HIT Domain Authority (HDA) . . . . .	8
3.4. Edward Digital Signature Algorithm for HHITs . . . . .	9
3.4.1. HOST_ID . . . . .	9
3.4.2. HIT_SUITE_LIST . . . . .	10
3.5. ORCHIDs for Hierarchical HITs . . . . .	11
3.5.1. Adding Additional Information to the ORCHID . . . . .	12
3.5.2. ORCHID Encoding . . . . .	13
3.5.3. ORCHID Decoding . . . . .	14
3.5.4. Decoding ORCHIDs for HIPv2 . . . . .	14
4. Hierarchical HITs as Remote ID DRIP Entity Tags (DET) . . . . .	14
4.1. Nontransferability of DETs . . . . .	15
4.2. Encoding HHITs in CTA 2063-A Serial Numbers . . . . .	15
4.3. Remote ID DET as one class of Hierarchical HITs . . . . .	17
4.4. Hierarchy in ORCHID Generation . . . . .	17
4.5. DRIP Entity Tag (DET) Registry . . . . .	17
4.6. Remote ID Authentication using DETs . . . . .	17
5. DRIP Entity Tags (DETs) in DNS . . . . .	18
6. Other UTM Uses of HHITs beyond DET . . . . .	19
7. Summary of Addressed DRIP Requirements . . . . .	19
8. DET Privacy . . . . .	19
9. IANA Considerations . . . . .	20
9.1. New IANA DRIP Registry . . . . .	20
9.2. IANA CGA Registry Update . . . . .	21
9.3. IANA HIP Registry Updates . . . . .	21
9.4. IANA IPSECKEY Registry Update . . . . .	22
9.5. New Well-Known IPv6 prefix for DETs . . . . .	23

10. Security Considerations	24
10.1. DET Trust	25
10.2. Collision Risks with DETs	26
11. References	26
11.1. Normative References	26
11.2. Informative References	27
Appendix A. EU U-Space RID Privacy Considerations	30
Appendix B. The 14/14 HID split	31
Appendix C. Calculating Collision Probabilities	32
Acknowledgments	32
Authors' Addresses	33

## 1. Introduction

~~DRIP Requirements~~ [RFC9153] describes an Unmanned Aircraft System Remote Identification and tracking (UAS ID) as unique (ID-4), non-spoofable (ID-5), and identify a registry where the ID is listed (ID-2); all within a ~~20-20-character character~~ identifier (ID-1).

Commenté [BMI4]: Otherwise, you wil have to remove “s” of édescribes” or add “document”

This document describes the use of Hierarchical Host Identity Tags (HHITs) (Section 3) as self-asserting IPv6 addresses and, thereby, a trustable identifier for use as the UAS Remote ID. HHITs include explicit hierarchy to enable DNS HHIT queries (Host ID for authentication, e.g., [drip-authentication]) and for Extensible Provisioning Protocol (EPP) Registrar discovery [RFC7484] for 3rd-party identification attestation (e.g., [drip-authentication]).

Commenté [BMI5]: Replaced with RFC 9224

This addition of hierarchy to HITs requires updates to both [RFC7401] and [RFC7343].

HHITs, as used within the context of Unmanned Aircraft System (UAS), ~~will beare~~ labeled as DRIP

Entity Tags (DETs). Throughout this document HHIT and DET will be used appropriately. HHIT will be used when covering the technology, and DET for their context within UAS RID.

HHITs are statistically unique through the cryptographic hash feature of second-preimage resistance. The cryptographically-bound addition of the hierarchy and a HHIT registration process [drip-registries] provide complete, global HHIT uniqueness. This contrasts with using general identifiers (e.g., a Universally Unique IDentifiers (UUID) [RFC4122] or device serial numbers) as the subject in an X.509 [RFC5280] certificate.

In a ~~multi-multi~~-Certificate Authority (multi-CA) PKI alternative to HHITs, a Remote ID as the Subject (Section 4.1.2.6 of [RFC5280]) can occur in multiple CAs, possibly fraudulently. CAs within the PKI would need to implement an approach to enforce assurance of the uniqueness achieved with HHITs.

Hierarchical HITs provide self-attestation of the HHIT registry. A HHIT can only be in a single registry within a registry system (e.g., EPP and DNS).

Hierarchical HITs are valid, though non-routable, IPv6 addresses [RFC8200]. As such, they fit in many ways within various IETF technologies.

## 2. Terms and Definitions

### 2.1. Requirements Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

### 2.2. Notations

| Signifies concatenation of information - e.g., X | Y is the concatenation of X and Y.

### 2.3. Definitions

This document uses the terms defined in [DRIP Requirements Section 2.2 of \[RFC9153\]](#).

The following new terms are used in the document:

cSHAKE (The customizable SHAKE function [NIST.SP.800-185]):

Extends the SHAKE [NIST.FIPS.202] scheme to allow users to customize their use of the SHAKE function.

HDA (Hierarchical HIT Domain Authority):

The 14-bit field that identifies the HHIT Domain Authority under a Registered Assigning Authority (RAA).

HHIT

Hierarchical Host Identity Tag. A HIT with extra hierarchical information not found in a standard HIT [RFC7401].

HI

Host Identity. The public key portion of an asymmetric key pair as defined in [RFC9063].

HID (Hierarchy ID):

The ~~3228-bit-bit~~ field providing the HIT Hierarchy ID.

Commenté [BMI6]: To reflect the updated design

HIP (Host Identity Protocol)

The origin of HI, HIT, and HHIT, ~~required for DRIP~~.

HIT

Host Identity Tag. A 128-bit handle on the HI. HITs are valid IPv6 addresses.

Keccak (KECCAK Message Authentication Code):

The family of all sponge functions with a KECCAK-f permutation as the underlying function and multi-rate padding as the padding rule. [It refers to](#) in particular [to](#) all the functions referenced

from

[NIST.FIPS.202] and [NIST.SP.800-185].

KMAC (KECCAK Message Authentication Code [NIST.SP.800-185]):

A Pseudo Random Function (PRF) and keyed hash function based on KECCAK.

RAA (Registered Assigning Authority):

The 14-bit field identifying the business or organization that manages a registry of HDAs.

RVS (Rendezvous Server):

A Rendezvous Server such as the HIP Rendezvous Server for enabling mobility, as defined in [RFC8004].

SHAKE (Secure Hash Algorithm KECCAK [NIST.FIPS.202]):

A secure hash that allows for an arbitrary output length.

XOF (eXtendable-Output Function [NIST.FIPS.202]):

A function on bit strings (also called messages) in which the output can be extended to any desired length.

### 3. The Hierarchical Host Identity Tag (HHIT)

The Hierarchical HIT (HHIT) is a small but important enhancement over the flat HIT space, constructed as an Overlay Routable Cryptographic Hash Identifier (ORCHID) [RFC7343]. By adding two levels of hierarchical administration control, the HHIT provides for device registration/ownership, thereby enhancing the trust framework for HITs.

HHITs represent the HI in only a 64-bit hash, expand the Suite ID to 8 bits, and use the other 28 bits to create a hierarchical administration organization for HIT domains.

Hierarchical HIT

construction is defined in Section 3.5. The input values for the Encoding rules are described in Section 3.5.1.

A HHIT is built from the following fields [\(Figure 1\)](#):

- \* p = [IANA-an IPv6](#) prefix (max 28 bit)
- \* 28-bit Hierarchy ID (HID) which provides the structure to organize HITS into administrative domains. HIDs are further divided into two fields:
  - 14-bit Registered Assigning Authority (RAA) (Section 3.3.1)
  - 14-bit Hierarchical HIT Domain Authority (HDA) (Section 3.3.2)
- \* 8 bit HHIT Suite ID ([HHSI](#))
- \* ORCHID hash (96 - prefix length - 8 for HHIT Suite ID, e.g., 64) See Section 3.5 [for more details](#).

**Commenté [BMI7]:** To cover cases where Network-specific hhits are allowed.

**a mis en forme :** Français (France)

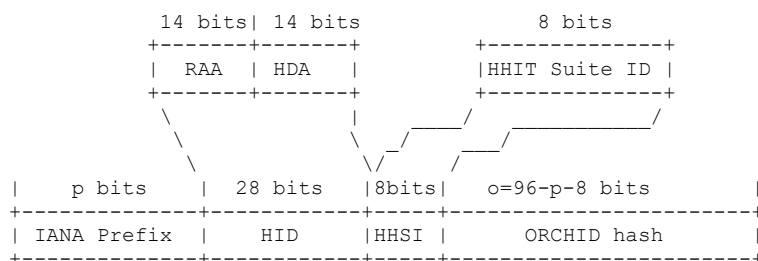


Figure 1: HHIT Format

The Context ID (generated with [openssl rand](#)) for the ORCHID hash is:

Context ID := 0x00B5 A69C 795D F5D5 F008 7F56 843F 2C40

Context IDs are allocated out of the namespace introduced for Cryptographically Generated Addresses (CGA) Type Tags [RFC3972].

**Commenté [BMI8]:** Add a pointer ?

[A script for generating HHITs based on an early version of this specification is available at](#) [A python script is available for generating HHITs](#) [hhit-gen].

### 3.1. HHIT Prefix for RID Purposes

The IPv6 HHIT prefix MUST be distinct from that used in the flat-space HIT as allocated in [RFC7343]. Without this [unique distinct](#) prefix, the first 4 bits of the RAA would be interpreted as the HIT Suite ID per HIPv2 [RFC7401].

**Commenté [BMI9]:** The key aspect is #HIT.

Initially, for DET use, one 28-bit prefix ~~should be~~ [is](#) assigned out of the IANA IPv6 Special Purpose Address Block, ~~namely 2001::/23, as per [RFC6890]~~.

**Commenté [BMI10]:** Redundant with the IANA section.

HHIT Use	Bits	Value
DET	28	TBD6 (suggested value 2001:30::/28)

- [Note to the RFC Editor: Please replace TBD6 with the assigned IPv6 prefix in Section 9.5.](#)

Other prefixes may be added in the future either for DET use or other applications of HHITs. For a prefix to be added to ~~this~~[the](#) registry [in Section 9.1](#), its usage and HID allocation process ~~needs~~[have](#) to be publicly available.

### 3.2. HHIT Suite IDs

The HHIT Suite IDs specify the HI and hash algorithms. These are a superset of the HIT Suite ID as defined in Section 5.2.10 of [RFC7401].

The HHIT values of 1 - 15 map to the 4-bit HIT Suite IDs. HHIT values of 17 - 31 map to the 8-bit HIT Suite IDs. HHIT values unique to HHIT will start with value 32.

As HHIT introduces a new Suite ID, EdDSA/cSHAKE128, and since this is of value to HIPv2, it will be allocated out of the 4-bit HIT space and result in an update to HIT Suite IDs.

Future HHIT Suite IDs may be allocated similarly, or may come out of the additional space made available by going to 8 bits.

The following HHIT Suite IDs are defined:

HHIT Suite	Value
RESERVED	0
RSA, DSA/SHA-256	1 [RFC7401]
ECDSA/SHA-384	2 [RFC7401]
ECDSA LOW/SHA-1	3 [RFC7401]
EdDSA/cSHAKE128	TBD3 (suggested value 5) (RECOMMENDED)
RESERVED	16

#### 3.2.1. HDA custom HIT Suite IDs

Support for ~~8-bit~~[8-bit](#) HHIT Suite IDs allows for HDA custom HIT Suite IDs.

These will be assigned values greater than 15 as follows:

HIT Suite	Value
HDA Assigned 1	TBD4 (suggested value 254)
HDA Assigned 2	TBD5 (suggested value 255)

[This feature](#), for example, may be used for large-scale experimenting with post quantum computing hashes or similar domain specific needs. Note that currently there is no support for domain-specific HI algorithms.

Commenté [BMI11]: Be explicit about the "feature"

### 3.3. The Hierarchy ID (HID)

The Hierarchy ID (HID) provides the structure to organize HITs into administrative domains. HIDs are further divided into two fields:

- \* 14-bit Registered Assigning Authority (RAA)
- \* 14-bit Hierarchical HIT Domain Authority (HDA)

The rationale for the 14/14 HID split is described in Appendix B.

#### 3.3.1. The Registered Assigning Authority (RAA)

An RAA is a business or organization that manages a registry of HDAs. For example, the [US Federal Aviation Authority \(FAA\)](#) could be an RAA.

**Commenté [BMI12]:** May be cite another regional authority.

The RAA is a 14-bit field (16,384 RAAs). ~~The -managed-management of this space is further elaborated as described in~~ [drip-registries]. An RAA must provide a set of services to allocate HDAs to organizations. It must have a public policy on what is necessary to obtain an HDA. The RAA need not maintain any HIP related services. It must maintain a DNS zone minimally for discovering HID RVS servers. The zone delegation is also covered in [drip-registries].

As HHITs may be used in many different domains, RAA should be allocated in blocks with consideration on the likely size of a particular usage. Alternatively, different prefixes can be used to separate different domains of use of HHITs.

This DNS zone may be a PTR for its RAA. It may be a zone in an HHIT specific DNS zone. Assume that the RAA is 100. The PTR record could be constructed as follows:

```
100.hhit.arpa    IN PTR      raa.bar.com.
```

#### 3.3.2. The Hierarchical HIT Domain Authority (HDA)

An HDA may be an [Internet Service Provider \(ISP\)](#), [UAS Service Supplier \(USS\)](#), or any third party that takes on the business to provide UAS services management, HIP [rendezvous server \(RVS\)](#), or other needed services such as those required for HHIT and/or HIP-enabled devices.



The HDA is a 14-bit field (16,384 HDAs per RAA). ~~The management of this space is further elaborated assigned by an RAA as described~~ in [drip-registries]. An HDA must maintain public and private UAS registration information and should maintain a set of RVS servers for UAS clients that may use HIP. How this is done and scales to the potentially millions of customers are outside the scope of this document, though covered in [drip-registries]. This service should be discoverable through the DNS zone maintained by the HDA's RAA.

An RAA may assign a block of values to an individual organization. This is completely up to the individual RAA's published policy for delegation. Such policy is out of scope.

#### 3.4. Edward Digital Signature Algorithm for HHITs

The Edwards-Curve Digital Signature Algorithm (EdDSA) [RFC8032] is specified here for use as Host Identities (HIs) per HIPv2 [RFC7401].

The intent in this document is to add EdDSA as a HI algorithm for DETs, but doing so impacts the HIP parameters used in a HIP exchange. As such the following updates HIP parameters. Other than the HIP DNS RR ([Resource Record](#)), these should not be needed in a [DRIP implementation that does not](#) use HIP.

**Commenté [BMI13]:** I wonder if we can say this more loudly early in the document (e.g., introduction)

See Section 3.2 for use of the HIT Suite in the context of ~~this document~~[DRIP](#).

##### 3.4.1. HOST\_ID

The HOST\_ID parameter specifies the public key algorithm, and for elliptic curves, a name. The HOST\_ID parameter is defined in Section 5.2.19 of [RFC7401].

Algorithm profiles	Values
EdDSA	TBD1 (suggested value 13) [RFC8032] (RECOMMENDED)

##### 3.4.1.1. HIP Parameter support for EdDSA

The addition of EdDSA as a HI algorithm requires a subfield in the HIP HOST\_ID parameter (Section 5.2.9 of [RFC7401]) as was done for ECDSA when used in a HIP exchange.

For HIP hosts that implement EdDSA as the algorithm, the following EdDSA curves are represented by the following fields:

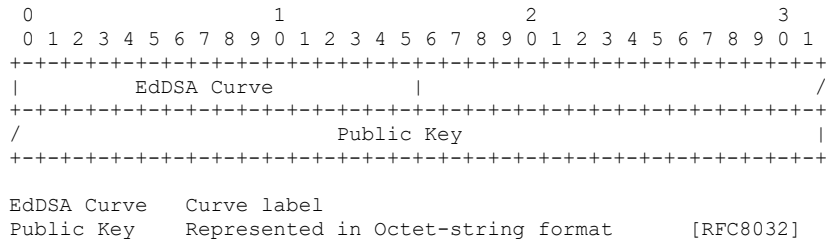


Figure 2

For hosts that implement EdDSA as a HIP algorithm the following EdDSA curves are required:

Algorithm	Curve	Values	
EdDSA	RESERVED	0	
EdDSA	EdDSA25519	1 [RFC8032]	(RECOMMENDED)
EdDSA	EdDSA25519ph	2 [RFC8032]	
EdDSA	EdDSA448	3 [RFC8032]	(RECOMMENDED)
EdDSA	EdDSA448ph	4 [RFC8032]	

3.4.1.2. HIP DNS RR support for EdDSA

The HIP DNS RR ~~(Resource Record)~~ is defined in [RFC8005]. It uses the values defined for the 'Algorithm Type' of the IPSECKEY RR [RFC4025] for its PK Algorithm field.

The new EdDSA HI ~~will~~ uses [RFC8080] for the IPSECKEY RR encoding:

Value	Description
TBD2 (suggested value 4)	An EdDSA key is present, in the format defined in [RFC8080]

3.4.2. HIT\_SUITE\_LIST

The HIT\_SUITE\_LIST parameter contains a list of the supported HIT suite IDs of the HIP Responder. Based on the HIT\_SUITE\_LIST, the HIP Initiator can determine which source HIT Suite IDs are supported by the Responder. The HIT\_SUITE\_LIST parameter is defined in Section 5.2.10 of [RFC7401].

The following HIT Suite ID is defined, and the relationship between the ~~four~~4-bit ID value used in the OGA ID field and the ~~eight~~8-bit encoding within the HIT\_SUITE\_LIST ID field is clarified:

Commenté [BMI14]: Where ?

HIT Suite	Value
EdDSA/cSHAKE128	TBD3 (suggested value 5) (RECOMMENDED)

[Table 1](#)The following table provides more detail on the above HIT Suite combination.

The output of cSHAKE128 is variable per the needs of a specific ORCHID construction. It is at most 96 bits long and is directly used in the ORCHID (without truncation).

Index	Hash function	HMAC	Signature algorithm family	Description
5	cSHAKE128	KMAC128	EdDSA	EdDSA HI hashed with cSHAKE128, output is variable

Table 1: HIT Suites

### 3.5. ORCHIDs for Hierarchical HITs

This section improves on ORCHIDv2 [RFC7343] with three enhancements:

- \* Optional ["Info"](#) field between the Prefix and OGA ID.
- \* Increased flexibility on the length of each component in the ORCHID construction, provided the resulting ORCHID is 128 bits.
- \* Use of cSHAKE, NIST SP 800-185 [NIST.SP.800-185], for the hashing function.

The Keccak [Keccak] based cSHAKE XOF hash function is a variable output length hash function. As such it does not use the truncation operation that other hashes need. The invocation of cSHAKE specifies the desired number of bits in the hash output. Further, cSHAKE has a parameter 'S' as a customization bit string. This parameter will be used for including the ORCHID Context Identifier in a standard fashion.

This ORCHID construction includes the fields in the ORCHID in the hash to protect them against substitution attacks. It also provides for inclusion of additional information, in particular the hierarchical bits of the Hierarchical HIT, in the ORCHID generation. This should be viewed as an addendum to ORCHIDv2 [RFC7343], as it can produce ORCHIDv2 output.

## 3.5.1. Adding Additional Information to the ORCHID

ORCHIDv2 [RFC7343] is defined as consisting of three components:

ORCHID := Prefix | OGA ID | Encode\_96( Hash )

where:

Prefix : A constant 28-bit-long bitstring value  
(~~IANA~~ IPv6 ~~assigned~~).

OGA ID : A 4-bit long identifier for the Hash\_function  
in use within the specific usage context. When  
used for HIT generation this is the HIT Suite ID.

Encode\_96( ) : An extraction function in which output is obtained  
by extracting the middle 96-bit-long bitstring  
from the argument bitstring.

This addendum will be constructed as follows:

ORCHID := Prefix (p) | Info (n) | OGA ID (o) | Hash (m)

where:

Prefix (p) : An ~~IANA~~ IPv6 ~~assigned~~ prefix (max 28-bit-long).

Info (n) : 'n' bits of information that define a use of the  
ORCHID. 'n' can be zero, that is no additional  
information.

OGA ID (o) : A 4 or 8-bit long identifier for the Hash\_function  
in use within the specific usage context. When  
used for HIT generation this is the HIT Suite ID.  
When used for HHIT generation this is the  
HHIT Suite ID.

Hash (m) : An extraction function in which output is 'm' bits.

$p + n + o + m = 128$  bits

With a 28-bit IPv6 ~~Prefix~~ prefix, the remaining 100 bits can be divided  
in any manner between the additional information ("Info"), OGA ID, and  
the hash output. Care must be considering the size of the hash portion,  
taking into account risks like pre-image attacks. ~~Thus~~ 64 bits, as  
used in Hierarchical HITs, may be as small as is acceptable. The size  
of 'n' is determined as what is left; in the case of the 8-bit OGA  
used for HHIT, this is 28 bits.

Commenté [BMI15]: We cover also network specific  
prefix

a mis en forme : Surlignage

### 3.5.2. ORCHID Encoding

This addendum adds a different encoding process to that currently used in ORCHIDv2. The input to the hash function explicitly includes all the header content plus the Context ID. The header content consists of the Prefix, the [Additional Information](#), and OGA ID (HIT Suite ID). Secondly, the length of the resulting hash is set by sum of the length of the ORCHID header fields. For example, a 28-bit prefix with 28 bits for the HID and 8 bits for the OGA ID leaves 64 bits for the hash length.

To achieve the variable length output in a consistent manner, the cSHAKE hash is used. For this purpose, cSHAKE128 is appropriate. The cSHAKE function call for this addendum is:

```
cSHAKE128(Input, L, "", Context ID)
```

```
Input      := Prefix | Additional Information | OGA ID | HOST_ID
L          := Length in bits of hash portion of ORCHID
```

For full Suite ID support (those that use fixed length hashes like SHA256), the following hashing can be used (Note: this does not produce output identical to ORCHIDv2 for a /28 prefix and Additional Information of zero-length):

```
Hash[L](Context ID | Input)
```

```
Input      := Prefix | Additional Information | OGA ID | HOST_ID
L          := Length in bits of hash portion of ORCHID
```

```
Hash[L]    := An extraction function in which output is obtained
               by extracting the middle L-bit-long bitstring
               from the argument bitstring.
```

[Hierarchical HITs use the same context](#) as HIPv2 HIT as the ORCHID generation is clearly separated by the distinct Prefix in HHIT.

#### 3.5.2.1. Encoding ORCHIDs for HIPv2

This section discusses how to provide backwards compatibility for ORCHIDv2 [RFC7343] as used in HIPv2 [RFC7401].

For HIPv2, the Prefix is 2001:20::/28. 'Info' is zero-length (i.e., not included), and OGA ID is 4-bit. Thus, the HI Hash is [length](#) 96-bit [length](#). Further, the Prefix and OGA ID are not included in the hash calculation. Thus, the following ORCHID calculations for fixed output length hashes are used:

Commenté [BMI16]: Info ?

Commenté [BMI17]: Isn't the following context that is used?

0xF0EF F02F BFF4 3D0F E793 0C3C 6E61 74EA

Hash[L](Context ID | Input)

Input := HOST\_ID

L := 96

Context ID := 0xF0EF F02F BFF4 3D0F E793 0C3C 6E61 74EA

Hash[L] := An extraction function in which output is obtained by extracting the middle L-bit-long bitstring from the argument bitstring.

For variable output length hashes use:

Hash[L](Context ID | Input)

Input := HOST\_ID

L := 96

Context ID := 0xF0EF F02F BFF4 3D0F E793 0C3C 6E61 74EA

Hash[L] := The L-bit output from the hash function

Then, the ORCHID is constructed as follows:

Prefix | OGA ID | Hash Output

### 3.5.3. ORCHID Decoding

With this addendum, the decoding of an ORCHID is determined by the Prefix and OGA ID. ORCHIDv2 [RFC7343] decoding is selected when the Prefix is: 2001:20::/28.

For Hierarchical HITs, the decoding is determined by the presence of the HHIT Prefix as specified in Section 9.5.

### 3.5.4. Decoding ORCHIDs for HIPv2

This section is included to provide backwards compatibility for ORCHIDv2 [RFC7343] as used for HIPv2 [RFC7401].

HITs are identified by a Prefix of 2001:20::/28. The next 4 bits are the OGA ID. The remaining 96 bits are the HI Hash.

## 4. Hierarchical HITs as Remote ID DRIP Entity Tags (DETs)

Hierarchical HITs are a refinement on the Host Identity Tag (HIT) of HIPv2. HHITs require a new ORCHID mechanism as described in Section 3.5.

HHITs for UAS ID (called, DETs) also use the new EdDSA/SHAKE128 HIT suite defined in Section 3.4 (GEN-2 in [RFC9153]). This hierarchy, cryptographically embedded within the HHIT, provides the information for finding the UA's HHIT registry (ID-3 in [RFC9153]).

As per [20212022](#), ASTM Standard Specification for Remote ID and Tracking

[F3411] specifies four UAS ID types:

TYPE-1 A static, manufacturer assigned, hardware serial number per ANSI/CTA-2063-A "Small Unmanned Aerial System Serial Numbers" [CTA2063A].

TYPE-2 A [Civil Aviation Authority \(CAA\)](#) assigned (presumably static) ID.

TYPE-3 An [UAS Traffic Management \(UTM\)](#) system assigned UUID [RFC4122]. These can be dynamic, but do not need to be.

TYPE-4 Specific Session ID (SSI)

Note that Types 1 - 3 allow for an UAS ID with a maximum length of 20 bytes, the SSI (Type 4) uses the first byte of the ID for the SSI value, thus restricting the UAS ID to a maximum of 19 bytes. The SSI values initially assigned (as per [20212022](#)) are:

ID 1 IETF - DRIP Drone Remote Identification Protocol (DRIP) entity ID.

ID 2 3GPP - IEEE 1609.2-2016 HashedID8

#### 4.1. Nontransferability of DETs

A HI and its HHIT SHOULD NOT be transferable between UA or even between replacement electronics (e.g., replacement of damaged controller CPU) for a UA. The private key for the HI SHOULD be held in a cryptographically secure component.

#### 4.2. Encoding HHITs in CTA 2063-A Serial Numbers

In some cases, it is advantageous to encode HHITs as a CTA 2063-A Serial Number [CTA2063A]. For example, the FAA Remote ID Rules [FAA RID] state that a Remote ID Module (i.e., not integrated with UA controller) must only use "the serial number of the unmanned aircraft"; CTA 2063-A meets this requirement.

Encoding an HHIT within the CTA 2063-A format is not simple. The CTA 2063-A format is defined as [follows](#):

Serial Number := MFR Code | Length Code | MFR SN

where:

MFR Code : 4 character code assigned by ICAO  
(International Civil Aviation Organization,  
a UN Agency).

Length Code : 1 character Hex encoding of MFR SN length (1-F).

MFR SN : Alphanumeric code (0-9, A-Z except O and I).  
Maximum length of 15 characters.

There is no place for the HID; there will need to be a mapping service from Manufacturer Code to HID. The HHIT Suite ID and ORCHID hash will take the full 15 characters (as described below) of the MFR SN field.

A character in a CTA 2063-A Serial Number "shall include any combination of digits and uppercase letters, except the letters O and I, but may include all digits". This would allow for a Base34 encoding of the binary HHIT Suite ID and ORCHID hash in 15 characters. Although, programmatically, such a conversion is not hard, other technologies (e.g., credit card payment systems) that have used such odd base encoding have had performance challenges. Thus, here a Base32 encoding will be used by also excluding the letters Z and S (too similar to the digits 2 and 5).

The low-order 72 bits (HHIT Suite ID | ORCHID hash) of the HHIT SHALL be left-padded with 3 bits of zeros. This 75-bit number will be encoded into the 15-15-character MFR SN field using the digit/letters above. The manufacturer MUST use a Length Code of F (15).

Using the sample DET from Section 5 that is for HDA=20 under RAA=10 and having the ICAO CTA MFR Code of 8653, the 20-character CTA 2063-A Serial Number would be:

8653F02T7B8RA85D19LX

A mapping service (e.g., DNS) MUST provide a trusted (e.g., via DNSSEC) conversion of the 4-character Manufacturer Code to high-order 58 bits (Prefix | HID) of the HHIT. Definition of this mapping service is currently out of scope of this document.

Commenté [BMI18]: Please add a pointer

It should be noted that this encoding would only be used in the Basic ID Message (Section 2.2 of [RFC9153]). The ~~HHIT-DET will-is still-be~~ used in the Authentication

Messages (i.e., the messages that provide framing for authentication data only).



#### 4.3. Remote ID DET as one ~~Ce~~lass of Hierarchical HHITs

UAS Remote ID DET may be one of a number of uses of HHITs. However, it is out of the scope of the document to elaborate on other uses of HHITs. As such, these follow-on uses need to be considered in allocating the RAAs (Section 3.3.1) or HHIT prefix assignments (Section 9).

#### 4.4. Hierarchy in ORCHID Generation

ORCHIDS, as defined in [RFC7343], do not cryptographically bind an IPv6 prefix nor the ~~Orechid~~-ORCHID Generation Algorithm (OGA) ID (the HHIT Suite ID) to the hash of the HI. The rationale at the time of developing ORCHID was attacks against these fields are Denial-of-Service (DoS) attacks against protocols using ORCHIDs and, thus, up to those protocols to address the issue.

HHITs, as defined in Section 3.5, cryptographically bind all content in the ORCHID through the hashing function. A recipient of a DET that has the underlying HI can directly trust and act on all content in the HHIT. This provides a strong, self-attestation for using the hierarchy to find the DET Registry based on the HID ([Section 4.5](#)).

#### 4.5. DRIP Entity Tag (DET) Registry

DETs are registered to HDAs. A registration process, [drip-registries], ensures DET global uniqueness (ID-4 in [RFC9153]). It also provides the mechanism to create UAS public/private data that are associated with the DET (REG-1 and REG-2 in [RFC9153]).

The two levels of hierarchy within the DET allows for CAAs to have their own ~~Registered Assigning Authority (RAA)~~ for their [National Air Space \(NAS\)](#). Within the RAA, the CAAs can delegate HDAs as needed. There may be other RAAs allowed to operate within a given NAS; this is a policy decision of each CAA.

#### 4.6. Remote ID Authentication using DETs

The EdDSA25519 HI (Section 3.4) underlying the DET can be used in an 84-byte self-proof attestation (timestamp, HHIT, and signature of these) to provide proof of Remote ID ownership (GEN-1 in [RFC9153]). In practice, the Wrapper and Manifest authentication formats ~~in the ASTM Authentication Message (Msg Type 0x2)~~ ([Sections 6.3.3 and 6.3.4 of](#) [drip-authentication]) implicitly provide this self-attestation. A lookup service like DNS can provide the HI and registration proof (GEN-3 in [RFC9153]).

Similarly, for Observers without Internet access, a 200-byte offline self-attestation could provide the same Remote ID ownership proof. This attestation would contain the HDA's signing of the UA's HHIT, itself signed by the UA's HI. Only a small cache that contains the HDA's HI/HHIT and HDA meta-data is needed by the Observer. However, such an object would just fit in the ASTM Authentication Message with no room for growth. In practice, [drip-authentication] provides this offline self-attestation in two authentication messages: the HDA's certification of the UA's HHIT registration in a Link authentication message whose hash is sent in a Manifest authentication message.

Hashes of any previously sent ASTM messages can be placed in a Manifest authentication message (GEN-2 in [RFC9153]). When a Location/Vector Message (~~Msg Type 0x1~~i.e., a message that provides UA location, altitude, heading, speed, and status) hash along with the hash of

the HDA's UA HHIT attestation are sent in a Manifest authentication message and the Observer can visually see a UA at the claimed location, the Observer has a very strong proof of the UA's Remote ID.

All this behavior and how to mix these authentication messages into the flow of UA operation messages are detailed in [drip-authentication].

## 5. DRIP Entity Tags (DETs) in DNS

There are two approaches for storing and retrieving DETs using DNS. The following are examples of how this may be done. This will serve as guidance to the actual deployment of DETs in DNS. However, this document does not intent to provide a recommendation. Further DNS-related considerations are covered in [drip-registries].

\* As FQDNs, for example, ".icao.int."

\* Reverse DNS lookups as IPv6 addresses per [RFC8005].

A DET can be used to construct an FQDN that points to the USS that has the public/private information for the UA (REG-1 and REG-2 in [RFC9153]). For example, the USS for the HHIT could be found via the following: Assume the RAA is 100 and the HDA is 50. The PTR record is constructed as follows:

```
100.50.det.uas.icao.int    IN PTR    foo.uss.icao.int.
```

The individual DETs may be potentially too numerous (e.g., 60 - 600M) and dynamic (e.g., new DETs every minute for some HDAs) to store in a signed, DNS zone. The HDA SHOULD provide DNS service for its zone and provide the HHIT detail response. A secure connection (e.g., ~~DNS-over-TLS~~ [RFC7858]) to the authoritative zone may be a viable alternative to DNSSEC.

Commenté [BMI19]: Or per rfc8501?

Commenté [BMI20]: Please update the references accordingly

The DET reverse lookup can be a standard IPv6 reverse look up, or it can leverage off the HHIT structure. If we assume a prefix of 2001:30::/28, the RAA is 10 and the HDA is 20, the DET is:

2001:30:280:1405:a3ad:1952:ad0:a69e

A DET reverse lookup could be to:

a69e.ad0.1952.a3ad.1405.280.30.2001.20.10.det.arpa.

or:

a3ad1952ad0a69e.5.20.10.30.2001.det.remoteid.icao.int.

A 'standard' ip6.arpa RR has the advantage of only one Registry service supported.

\$ORIGIN 5.0.4.1.0.8.2.0.0.3.0.0.1.0.0.2.ip6.arpa.  
e.9.6.a.0.d.a.0.2.5.9.1.d.a.3.a IN PTR

#### 6. Other UTM Uses of HHITs ~~beyond~~Beyond DET

HHITs might be used within the UTM architecture beyond DET (and USS in UA ID registration and authentication), for example, as a Ground Control Station (GCS) HHIT

ID. The GCS may use its ~~HHIT~~HHIT if it is the source of Network Remote

ID for securing the transport and for secure Command and Control (C2) transport (e.g., [drip-secure-nrid-c2]).

Observers may have their own HHITs to facilitate UAS information retrieval (e.g., for authorization to private UAS data). They could also use their HHIT for establishing a HIP connection with the UA Pilot for direct communications per authorization. Details about such ~~(this use is issues are currently outside out of~~ the scope of this document). ~~Further, they can be used by FINDER observers, (e.g., [crowd-sourced-rid]).~~

Commenté [BMI21]: Not sure this is needed.

#### 7. Summary of Addressed DRIP Requirements

This document provides the details to solutions for GEN 1 - 3, ID 1 - 5, and REG 1 - 2 requirements that are described in [RFC9153].

#### 8. DET Privacy

There is no expectation of privacy for DETs; it is not part of the Privacy privacy Normative normative Requirementsrequirements listed in Section 4.3.1, of [RFC9153]. DETs are broadcast in the clear over the open air via Bluetooth and Wi-Fi. They will be collected and collated with other public information about the UAS. This will include DET registration information and location and times of operations for a DET. A DET can be for the

life of a UA if there is no concern about DET/UA activity harvesting.

Further, the MAC address of the wireless interface used for Remote ID broadcasts are a target for UA operation aggregation that may not be mitigated through address randomization. For Bluetooth 4 Remote ID messaging, the MAC address is used by observers to link the Basic ID Message that contains the RID with other Remote ID messages, thus must be constant for a UA operation. This message linkage use of MAC addresses may not be needed with the Bluetooth 5 or Wi-Fi PHYs. These PHYs provide for a larger message payload and can use the Message Pack (Msg Type 0xF) and the Authentication Message to transmit the RID with other Remote ID messages. However, it is not mandatory to send the RID in a Message Pack or Authentication Message, so allowance for using the MAC address for UA message linking must be maintained. That is, the MAC address should be stable for at least a UA operation.

Finally, it is not adequate to simply change the DET and MAC for a UA per operation to defeat historically tracking a UA's activity.

Any changes to the UA MAC may have impacts to C2 setup and use. A constant GCS MAC may well defeat any privacy gains in UA MAC and RID changes. UA/GCS binding is complicated with changing MAC addresses; historically UAS design assumed these to be "forever" and made setup a one-time process. Additionally, if IP is used for C2, a changing MAC may mean a changing IP address to further impact the UAS bindings. Finally, an encryption wrapper's identifier (such as ESP [RFC4303] SPI) would need to change per operation to insure operation tracking separation.

Creating and maintaining UAS operational privacy is a multifaceted problem. Many communication pieces need to be considered to truly create a separation between UA operations. Simply changing the UAS RID only starts the changes that need to be implemented.

## 9. IANA Considerations

### 9.1. New IANA DRIP Registry

This document requests IANA to create a new registry titled "Drone Remote Identification Protocol" registry. The following two subregistries should be created under that registry.

#### Hierarchical HIT (HHIT) Prefixes:

Initially, for DET use, one 28-bit prefix should be assigned out of the IANA IPv6 Special Purpose Address Block, namely 2001::/23, as per [RFC6890]. Future additions to this subregistry are to be made through Expert Review (Section 4.5 of [RFC8126]). Entries with network-specific prefixes may be present in the registry.

HHIT Use	Bits	Value
DET	28	TBD6 (suggested value 2001:30::/28)

#### Hierarchical HIT (HHIT) Suite ID:

This 8-bit valued subregistry is a superset of the 4/8-bit "HIT Suite ID" subregistry of the "Host Identity Protocol (HIP) Parameters" registry in [IANA-HIP]. The following HHIT Suite IDs are defined:

HHIT Suite	Value
RESERVED	0
RSA, DSA/SHA-256	1 [RFC7401]
ECDSA/SHA-384	2 [RFC7401]
ECDSA LOW/SHA-1	3 [RFC7401]
EdDSA/cSHAKE128	TBD3 (suggested value 5) (RECOMMENDED)
RESERVED	16
HDA Assigned 1	TBD4 (suggested value 254)
HDA Assigned 2	TBD5 (suggested value 255)

### 9.2. IANA CGA Registry Update

This document requests IANA to make the following change to the IANA "CGA Extension Type Tags registry [IANA-CGA] registry:

#### Context ID:

The Context ID (Section 3) shares the namespace introduced for CGA Type Tags. Defining new Context IDs follow the rules in Section 8 of [RFC3972]:

Context ID := 0x00B5 A69C 795D F5D5 F008 7F56 843F 2C40

### 9.3. IANA HIP Registry Updates

This document requests IANA to make the following changes to the IANA "Host Identity Protocol (HIP) Parameters" [IANA-HIP] registry:

**Host ID:**

This document defines the new EdDSA Host ID with value TBD1 (suggested: 13) (Section 3.4.1) in the "HI Algorithm" subregistry of the "Host Identity Protocol (HIP) Parameters" registry.

Algorithm profiles	Values
EdDSA	TBD1 (suggested value 13) [RFC8032] (RECOMMENDED)

**EdDSA Curve Label:**

This document specifies a new algorithm-specific subregistry named "EdDSA Curve Label". The values for this subregistry are defined in Section 3.4.1.1.

Algorithm	Curve	Values
EdDSA	RESERVED	0
EdDSA	EdDSA25519	1 [RFC8032] (RECOMMENDED)
EdDSA	EdDSA25519ph	2 [RFC8032]
EdDSA	EdDSA448	3 [RFC8032] (RECOMMENDED)
EdDSA	EdDSA448ph	4 [RFC8032]

**HIT Suite ID:**

This document defines the new HIT Suite of EdDSA/cSHAKE with value TBD3 (suggested: 5) (Section 3.4.2) in the "HIT Suite ID" subregistry of the "Host Identity Protocol (HIP) Parameters" registry.

HIT Suite	Value
EdDSA/cSHAKE128	TBD3 (suggested value 5) (RECOMMENDED)

**9.4. IANA IPSECKEY Registry Update**

This document requests IANA to make the following change to the "IPSECKEY Resource Record Parameters" [IANA-IPSECKEY] registry:

**IPSECKEY:**

This document defines the new IPSECKEY value TBD2 (suggested: 4) (Section 3.4.1.2) in the "Algorithm Type Field" subregistry of the "IPSECKEY Resource Record Parameters" registry.

Value	Description
-------	-------------

TBD2 (suggested value 4)	
--------------------------	--

An EdDSA key is present, in the format defined in [RFC8080]	
---	--

#### 9.5. New Well-Known IPv6 prefix for DETs

Since the DET format is not compatible with [RFC7343], IANA is requested to allocate a new prefix following this template for the IPv6 Special-Purpose Address Registry.

Address Block:

IANA is requested to allocate a new 28-bit prefix out of the IANA IPv6 Special Purpose Address Block, namely 2001::/23, as per [RFC6890] (suggested: 2001:30::/28).

Name:

This block should be named "DRIP Device Entity Tags (DETs) Prefix".

RFC:

This document.

Allocation Date:

Date this document published.

Termination Date:

Forever.

Source:

False.

Destination:

False.

Forwardable:

False.

Globally Reachable:

False.

Reserved-by-Protocol:

False?

## 10. Security Considerations

The 64-bit hash in HHITs presents a real risk of second pre-image cryptographic hash attack Section 10.2. There are no known (to the authors) studies of hash size to cryptographic hash attacks. A Python script is available to randomly generate 1M HHITs that did not produce a hash collision which is a simpler attack than a first or second pre-image attack.

However, with today's computing power, producing  $2^{64}$  EdDSA keypairs and then generating the corresponding HHIT is economically feasible. Consider that a \*single\* bitcoin mining ASIC can do on the order of  $2^{46}$  sha256 hashes a second or about  $2^{62}$  hashes in a single day. The point being,  $2^{64}$  is not prohibitive, especially as this can be done in parallel.

Now it should be noted that the  $2^{64}$  attempts is for stealing a specific HHIT. Consider a scenario of a street photography company with 1,024 UAs (each with its own HHIT); you'd be happy stealing any one of them. Then rather than needing to satisfy a 64-bit condition on the cSHAKE128 output, you need only satisfy what is equivalent to a 54-bit condition (since [you have there are](#)  $2^{10}$  more opportunities for success).

Thus, although the probability of a collision or pre-image attack is low in a collection of 1,024 HHITs out of a total population of  $2^{64}$ , per Section 10.2, it is computationally and economically feasible. Therefore, the HHIT registration and HHIT/HI registration validation is strongly recommended.

The DET Registry services effectively block attempts to "take over" or "hijack" a DET. It does not stop a rogue attempting to impersonate a known DET. This attack can be mitigated by the receiver of the DET using DNS to find the HI for the DET. As such, use of DNSSEC and [DNS-DNS-over-over-TLS](#) by the DET registries is recommended.

The 60-bit hash for DETs with 8-bit OGAs have a greater hash attack risk. As such its use should be restricted to testing and to small, well managed UAS/USS.

Another mitigation of HHIT hijacking is if the HI owner (UA) supplies an object containing the HHIT and signed by the HI private key of the HDA such as discussed in Section 4.6.

The two risks with hierarchical HITs are the use of an invalid HID and forced HIT collisions. The use of a DNS zone (e.g., "det.arpa.") is a strong protection against invalid HIDs. Querying an HDA's RVS for a HIT under the HDA protects against talking to unregistered



clients. The Registry service [drip-registries], through its HHIT uniqueness enforcement, provides against forced or accidental HHIT hash collisions.

Cryptographically Generated Addresses (CGAs) provide an assurance of uniqueness. This is two-fold. The address (in this case the UAS ID) is a hash of a public key and a Registry hierarchy naming. Collision resistance (more important than it implied second-preimage resistance) makes it statistically challenging to attacks. A registration process [drip-registries] within the HDA provides a level of assured uniqueness unattainable without mirroring this approach.

The second aspect of assured uniqueness is the digital signing (attestation) process of the DET by the HI private key and the further signing (attestation) of the HI public key by the Registry's key. This completes the ownership process. The observer at this point does not know what owns the DET, but is assured, other than the risk of theft of the HI private key, that this UAS ID is owned by something and is properly registered.

#### 10.1. DET Trust

The DET in the ASTM Basic ID Message (Msg Type 0x0, the actual Remote ID message) does not provide any assertion of trust. The best that might be done within this Basic ID Message is 4 bytes truncated from a HI signing of the HHIT (the UA ID field is 20 bytes and a HHIT is 16). This is not trustable; that is, too open to a hash attack. Minimally, it takes 84 bytes (Section 4.6) to prove ownership of a DET with a full EdDSA signature. Thus, no attempt has been made to add DET trust directly within the very small Basic ID Message.

The ASTM Authentication Message (Msg Type 0x2) as shown in Section 4.6 can provide practical actual ownership proofs. These attestations include timestamps to defend against replay attacks. But in themselves, they do not prove which UA sent the message. They could have been sent by a dog running down the street with a Broadcast Remote ID module strapped to its back.

Proof of UA transmission comes when the Authentication Message includes proofs for the ASTM Location/Vector Message (Msg Type 0x1) and the observer can see the UA or that information is validated by ground multilateration [\[crowd-sourced-rid\]](#). Only then does an observer gain full trust in the DET of the UA.

DETs obtained via the Network RID path provides a different approach to trust. Here the UAS SHOULD be securely communicating to the USS ([see e.g., \[drip-secure-nrid-c2\]](#)), thus asserting DET trust.

Commenté [BMI22]: Why do we need to cite this document?

## 10.2. Collision Risks with DETs

The 64-bit hash size does have an increased risk of collisions over the 96-bit hash size used for the other HIT Suites. There is a 0.01% probability of a collision in a population of 66 million. The probability goes up to 1% for a population of 663 million. See Appendix C for the collision probability formula.

However, this risk of collision is within a single "Additional Information" value, i.e., a RAA/HDA domain. The UAS/USS registration process should include registering the DET and MUST reject a collision, forcing the UAS to generate a new HI and thus HHIT and reapplying to the DET registration process.

## 11. References

### 11.1. Normative References

- [IANA-CGA] IANA, "Cryptographically Generated Addresses (CGA) Message Type Name Space", <<https://www.iana.org/assignments/cga-message-types/cga-message-types.xhtml>>.
- [IANA-HIP] IANA, "Host Identity Protocol (HIP) Parameters", <<https://www.iana.org/assignments/hip-parameters/hip-parameters.xhtml>>.
- [IANA-IPSECKEY]  
IANA, "IPSECKEY Resource Record Parameters",  
<<https://www.iana.org/assignments/ipseckey-rr-parameters/ipseckey-rr-parameters.xhtml>>.
- [NIST.FIPS.202]  
Dworkin, M., "SHA-3 Standard: Permutation-Based Hash and Extendable-Output Functions", National Institute of Standards and Technology report,  
DOI 10.6028/nist.fips.202, July 2015,  
<<https://doi.org/10.6028/nist.fips.202>>.
- [NIST.SP.800-185]  
Kelsey, J., Change, S., and R. Perlner, "SHA-3 derived functions: cSHAKE, KMAC, TupleHash and ParallelHash", National Institute of Standards and Technology report,  
DOI 10.6028/nist.sp.800-185, December 2016,  
<<https://doi.org/10.6028/nist.sp.800-185>>.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC6890] Cotton, M., Vegoda, L., Bonica, R., Ed., and B. Haberman, "Special-Purpose IP Address Registries", BCP 153, RFC 6890, DOI 10.17487/RFC6890, April 2013, <<https://www.rfc-editor.org/info/rfc6890>>.
- [RFC7343] Laganier, J. and F. Dupont, "An IPv6 Prefix for Overlay Routable Cryptographic Hash Identifiers Version 2 (ORCHIDv2)", RFC 7343, DOI 10.17487/RFC7343, September 2014, <<https://www.rfc-editor.org/info/rfc7343>>.
- [RFC7401] Moskowitz, R., Ed., Heer, T., Jokela, P., and T. Henderson, "Host Identity Protocol Version 2 (HIPv2)", RFC 7401, DOI 10.17487/RFC7401, April 2015, <<https://www.rfc-editor.org/info/rfc7401>>.
- [RFC8005] Laganier, J., "Host Identity Protocol (HIP) Domain Name System (DNS) Extension", RFC 8005, DOI 10.17487/RFC8005, October 2016, <<https://www.rfc-editor.org/info/rfc8005>>.
- [RFC8126] Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", BCP 26, RFC 8126, DOI 10.17487/RFC8126, June 2017, <<https://www.rfc-editor.org/info/rfc8126>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

## 11.2. Informative References

- [cfrg-comment] "A CFRG review of draft-ietf-drip-rid", September 2021, <[https://mailarchive.ietf.org/arch/msg/cfrg/tAJJq60W6TlUv7\\_pde5cw5TDTCU/](https://mailarchive.ietf.org/arch/msg/cfrg/tAJJq60W6TlUv7_pde5cw5TDTCU/)>.
- [corus] CORUS, "U-space Concept of Operations", September 2019, <<https://www.sesarju.eu/node/3411>>.

- [crowd-sourced-rid] Moskowitz, R., Card, S. W., Wiethuechter, A., Zhao, S., and H. Birkholz, "Crowd Sourced Remote ID", Work in Progress, Internet-Draft, draft-moskowitz-drip-crowd-sourced-rid-06, 26 May 2021, <<https://datatracker.ietf.org/doc/html/draft-moskowitz-drip-crowd-sourced-rid-06>>.
- [CTA2063A] ANSI/CTA, "Small Unmanned Aerial Systems Serial Numbers", September 2019, <<https://shop.cta.tech/products/small-unmanned-aerial-systems-serial-numbers>>.
- [drip-authentication] Wiethuechter, A., Card, S., and R. Moskowitz, "DRIP Authentication Formats & Protocols for Broadcast Remote ID", Work in Progress, Internet-Draft, draft-ietf-drip-auth-05, 7 March 2022, <<https://datatracker.ietf.org/doc/html/draft-ietf-drip-auth-05>>.
- [drip-registries] Wiethuechter, A., Card, S., Moskowitz, R., and J. Reid, "DRIP Registries", Work in Progress, Internet-Draft, draft-ietf-drip-registries-01, 7 March 2022, <<https://datatracker.ietf.org/doc/html/draft-ietf-drip-registries-01>>.
- [drip-secure-nrid-c2] Moskowitz, R., Card, S. W., Wiethuechter, A., and A. Gurtov, "Secure UAS Network RID and C2 Transport", Work in Progress, Internet-Draft, draft-moskowitz-drip-secure-nrid-c2-04, 21 October 2021, <<https://datatracker.ietf.org/doc/html/draft-moskowitz-drip-secure-nrid-c2-04>>.
- [F3411] ASTM International, "Standard Specification for Remote ID and Tracking", <<http://www.astm.org/cgi-bin/resolver.cgi?F3411>>.
- [FAA\_RID] United States Federal Aviation Administration (FAA), "Remote Identification of Unmanned Aircraft", 2021, <<https://www.govinfo.gov/content/pkg/FR-2021-01-15/pdf/2020-28948.pdf>>.
- [hhit-gen] "Python script to generate HHITs", September 2021, <<https://github.com/ietf-wg-drip/draft-ietf-drip-rid/blob/master/hhit-gen.py>>.

- [Keccak] Bertoni, G., Daemen, J., Peeters, M., Van Assche, G., and R. Van Keer, "The Keccak Function", <<https://keccak.team/index.html>>.
- [RFC3972] Aura, T., "Cryptographically Generated Addresses (CGA)", RFC 3972, DOI 10.17487/RFC3972, March 2005, <<https://www.rfc-editor.org/info/rfc3972>>.
- [RFC4025] Richardson, M., "A Method for Storing IPsec Keying Material in DNS", RFC 4025, DOI 10.17487/RFC4025, March 2005, <<https://www.rfc-editor.org/info/rfc4025>>.
- [RFC4122] Leach, P., Mealling, M., and R. Salz, "A Universally Unique Identifier (UUID) URN Namespace", RFC 4122, DOI 10.17487/RFC4122, July 2005, <<https://www.rfc-editor.org/info/rfc4122>>.
- [RFC4303] Kent, S., "IP Encapsulating Security Payload (ESP)", RFC 4303, DOI 10.17487/RFC4303, December 2005, <<https://www.rfc-editor.org/info/rfc4303>>.
- [RFC5280] Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., and W. Polk, "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile", RFC 5280, DOI 10.17487/RFC5280, May 2008, <<https://www.rfc-editor.org/info/rfc5280>>.
- [RFC7484] Blanchet, M., "Finding the Authoritative Registration Data (RDAP) Service", RFC 7484, DOI 10.17487/RFC7484, March 2015, <<https://www.rfc-editor.org/info/rfc7484>>.
- [RFC8004] Laganier, J. and L. Eggert, "Host Identity Protocol (HIP) Rendezvous Extension", RFC 8004, DOI 10.17487/RFC8004, October 2016, <<https://www.rfc-editor.org/info/rfc8004>>.
- [RFC8032] Josefsson, S. and I. Liusvaara, "Edwards-Curve Digital Signature Algorithm (EdDSA)", RFC 8032, DOI 10.17487/RFC8032, January 2017, <<https://www.rfc-editor.org/info/rfc8032>>.
- [RFC8080] Sury, O. and R. Edmonds, "Edwards-Curve Digital Security Algorithm (EdDSA) for DNSSEC", RFC 8080, DOI 10.17487/RFC8080, February 2017, <<https://www.rfc-editor.org/info/rfc8080>>.

- [RFC8200] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", STD 86, RFC 8200, DOI 10.17487/RFC8200, July 2017, <<https://www.rfc-editor.org/info/rfc8200>>.
- [RFC9063] Moskowitz, R., Ed. and M. Komu, "Host Identity Protocol Architecture", RFC 9063, DOI 10.17487/RFC9063, July 2021, <<https://www.rfc-editor.org/info/rfc9063>>.
- [RFC9153] Card, S., Ed., Wiethuechter, A., Moskowitz, R., and A. Gurtov, "Drone Remote Identification Protocol (DRIP) Requirements and Terminology", RFC 9153, DOI 10.17487/RFC9153, February 2022, <<https://www.rfc-editor.org/info/rfc9153>>.

#### Appendix A. EU U-Space RID Privacy Considerations

EU is defining a future of airspace management known as U-space within the Single European Sky ATM Research (SESAR) undertaking. Concept of Operation for EuRopean UTM Systems (CORUS) project proposed low-level Concept of Operations [corus] for UAS in EU. It introduces strong requirements for UAS privacy based on European GDPR regulations. It suggests that UAs are identified with agnostic IDs, with no information about UA type, the operators or flight trajectory. Only authorized persons should be able to query the details of the flight with a record of access.

Due to the high privacy requirements, a casual observer can only query U-space if it is aware of a UA seen in a certain area. A general observer can use a public U-space portal to query UA details based on the UA transmitted "Remote identification" signal. Direct remote identification (DRID) is based on a signal transmitted by the UA directly. Network remote identification (NRID) is only possible for UAs being tracked by U-Space and is based on the matching the current UA position to one of the tracks.

The project lists "E-Identification" and "E-Registrations" services as to be developed. These services can follow the privacy mechanism proposed in this document. If an "agnostic ID" above refers to a completely random identifier, it creates a problem with identity resolution and detection of misuse. On the other hand, a classical HIT has a flat structure which makes its resolution difficult. The Hierarchical HITs provide a balanced solution by associating a registry with the UA identifier. This is not likely to cause a major conflict with U-space privacy requirements, as the registries are typically few at a country level (e.g., civil personal, military, law enforcement, or commercial).

Appendix B. The 14/14 HID ~~split~~Split

The following explains the logic behind selecting to divide the 28 bits of the HID into 2 14-bit components.

At this writing ICAO has 273 member "States", each may want to control RID assignment within its ~~National Air Space~~ (NAS). Some members may want separate RAAs to use for Civil, general Government, and Military use. They may also want allowances for competing Civil RAA operations. It is reasonable to plan for 8 RAAs per ICAO member (plus regional aviation organizations like in the European Union). Thus at a start a 4,096 RAA space is advised.

There will be requests by commercial entities for their own, RAA allotments. Examples could include international organizations that will be using UAS and international delivery service associations. These may be smaller than the RAA space needed by ICAO member States and could be met with a 2,048 space allotment, but as will be seen, might as well be 4,096 as well.

This may well cover currently understood RAA entities. There will be future new applications, branching off into new areas. So yet another space allocation should be set aside. If this is equal to all that has been reserved, we should allow for 16,384 ( $2^{14}$ ) RAAs.

The HDA allocation follows a different logic from that of RAAs. Per Appendix C, an HDA should be able to easily assign 63M RIDs and even manage 663M with a "first come, first assigned" registration process. For most HDAs this is more than enough, and a single HDA assignment within their RAA will suffice. Most RAAs will only delegate to a couple HDAs for their operational needs. But there are major exceptions that point to some RAAs needing large numbers of HDA assignments.

Delivery service operators like Amazon (est. 30K delivery vans) and UPS (est. 500K delivery vans) may choose, for anti-tracking reasons, to use unique RIDs per day or even per operation. 30K delivery UA could need 11M upwards to 44M RIDs. Anti-tracking would be hard to provide if the HID were the same for a delivery service fleet, so such a company may turn to an HDA that provides this service to multiple companies so that who's UA is who's is not evident in the HID. A USS providing this service could well use multiple HDA assignments per year, depending on strategy.

Perhaps a single RAA providing HDAs for delivery service (or similar behaving) UAS could 'get by' with a 2048 HDA space (11-bits). So the HDA space could well be served with only 12 bits allocated out of the 28-bit HID space. But as this is speculation, and it will take years of deployment experience, a 14-bit HDA space has been selected.

There may also be 'small' ICAO member States that opt for a single RAA and allocate their HDAs for all UA that are permitted in their NAS. The HDA space is large enough that some to use part for government needs as stated above and for small commercial needs. Or the State may use a separate, consecutive RAA for commercial users. Thus it would be 'easy' to recognize State-approved UA by HID high-order bits.

#### Appendix C. Calculating Collision Probabilities

The accepted formula for calculating the probability of a collision is:

$$p = 1 - e^{-k^2/(2n)}$$

P Collision Probability  
n Total possible population  
k Actual population

The following table provides the approximate population size for a collision for a given total population.

Total Population	Deployed Population With Collision Risk of	
	.01%	1%
2 <sup>96</sup>	4T	42T
2 <sup>72</sup>	1B	10B
2 <sup>68</sup>	250M	2.5B
2 <sup>64</sup>	66M	663M
2 <sup>60</sup>	16M	160M

#### Acknowledgments

Dr. Gurtov is an adviser on Cybersecurity to the Swedish Civil Aviation Administration.



Quynh Dang of NIST gave considerable guidance on using Keccak and the NIST supporting documents. Joan Deamen of the Keccak team was especially helpful in many aspects of using Keccak. Nicholas Gajcowski [cfgrg-comment] provided a concise hash pre-image security assessment via the CFRG list.

Many thanks to Michael Richardson for the iotdir review, Magnus Nystrom for the secdir review and DRIP co-chair and draft shepherd, Mohamed Boucadair for his extensive comments and help on document clarity.

#### Authors' Addresses

Robert Moskowitz  
HTT Consulting  
Oak Park, MI 48237  
United States of America  
Email: rgm@labs.htt-consult.com

Stuart W. Card  
AX Enterprize, LLC  
4947 Commercial Drive  
Yorkville, NY 13495  
United States of America  
Email: stu.card@axenterprize.com

Adam Wiethuechter  
AX Enterprize, LLC  
4947 Commercial Drive  
Yorkville, NY 13495  
United States of America  
Email: adam.wiethuechter@axenterprize.com

Andrei Gurtov  
Linköping University  
IDA  
SE-58183 Linköping  
Sweden  
Email: gurtov@acm.org