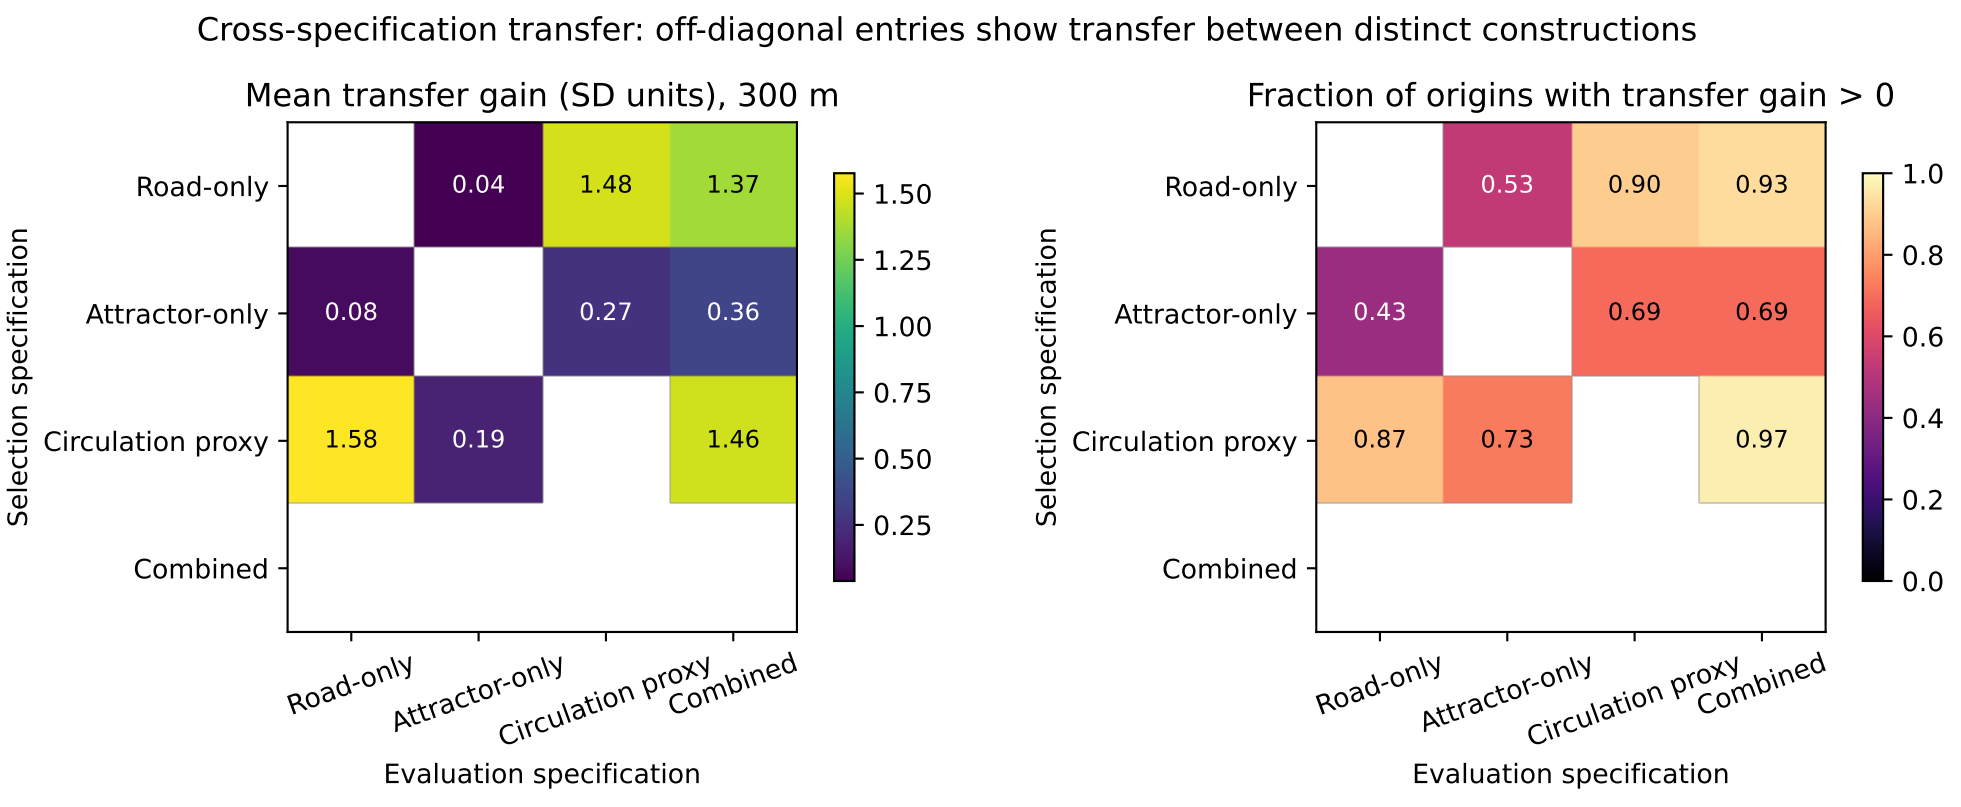
Cross-specification transfer: off-diagonal entries show transfer between distinct constructions
Mean transfer gain (SD units), 300 m
Selection specification
Road-only
Attractor-only
Circulation proxy
Combined
0.04
1.48
1.37
0.08
0.27
0.36
1.58
0.19
1.46
1.50
1.25
1.00
0.75
0.50
0.25
Road-only
Attractor-only
Circulation proxy
Combined
Evaluation specification
Fraction of origins with transfer gain > 0
Selection specification
Road-only
Attractor-only
Circulation proxy
Combined
0.53
0.90
0.93
0.43
0.69
0.69
0.87
0.73
0.97
1.0
0.8
0.6
0.4
0.2
0.0
Road-only
Attractor-only
Circulation proxy
Combined
Evaluation specification