

The LSST Data Management System

Mario Juric,¹ Jeffrey Kantor,² K-T Lim,³ Tim Jenness,² Frossie Economou,²
David L. Nidever,^{2,12} Joshua Hoblitt,² Jonathan Sick,² J. Matt Peterson,²
Angelo Fausti,² Fabio Hernandez,⁴ Željko Ivezić,¹ R. Lynne Jones,¹
Peter Yoachim,¹ Darko Jevremović,⁵ Veljko Vujčić,⁵ Jovan Aleksić,⁵
Richard A. Shaw,⁶ Robert Armstrong,⁷ James Bosch,⁷ Merlin Fisher-Levine,⁸
Vishal P. Kasliwal,^{7,9} Robert H. Lupton,⁷ Nate B. Lust,⁷
Lauren A. MacArthur,⁷ Paul A. Price,⁷ Michael A. Strauss,⁷
John D. Swinbank,⁷ Jacek Becla,³ Fabrice Jammes,¹⁰ Matias Carrasco Kind,¹¹
Hsin-Fang Chiang,¹¹ Donald Petravick,¹¹ Stephen R. Pietrowicz,¹¹
Yusra AlSayyad,¹ Andrew C. Becker,¹ Rahul Biswas,¹ Andrew J. Connolly,¹
Scott F. Daniel,¹ J. Bryce Kalmbach,¹ K. Simon Krughoff,¹ John Lurie,¹
Joachim Moeyens,¹ Russell Owen,¹ John K Parejko,¹ David J. Reiss,¹
Colin T. Slater,¹ Ian S. Sullivan¹

¹*University of Washington, Seattle, WA, U.S.A; mjuric@astro.washington.edu*

²*LSST Project Management Office, Tucson, AZ, U.S.A.*

³*SLAC National Laboratory, Menlo Park, CA, U.S.A.*

⁴*IN2P3 Computing Center, CNRS, Lyon-Villeurbanne, France*

⁵*Astronomical Observatory, Belgrade, Serbia*

⁶*NOAO, Tucson, AZ, U.S.A.*

⁷*Princeton University, Princeton, NJ, U.S.A.*

⁸*Brookhaven National Laboratory, Upton, NY, U.S.A.*

⁹*University of Pennsylvania, Philadelphia, PA, U.S.A.*

¹⁰*LPC, IN2P3, Clermont-Ferrand, France*

¹¹*National Center for Supercomputing Applications, Urbana, IL, U.S.A.*

¹²*University of Arizona, Tucson, AZ, U.S.A.*

Abstract.

The Large Synoptic Survey Telescope (LSST; <http://lsst.org>) is a planned, large-aperture, wide-field, ground-based telescope that will survey approximately 10,000 deg² of the sky every few nights in six optical bands from 320 to 1050 nm. It will explore a wide range of astrophysical questions, ranging from discovering “killer” asteroids, to examining the nature of Dark Energy.

The LSST will produce on average 15 terabytes of data per night, yielding an (uncompressed) processed data set of ~ 500 petabytes at the end of its 10-year mission and over eleven Data Releases. To enable the wide variety of planned science, the LSST Project is leading the construction of a new, general-purpose, high-performance, scalable, well documented, open source data processing software stack for O/IR sur-

veys. Prototypes of this stack are already capable of processing data from existing cameras (e.g., SDSS, DECam, MegaCam), and form the basis of the Hyper Supreme-Cam (HSC) Survey data reduction pipeline. In the 2020's, running on dedicated HPC facilities, this system will enable us to process the LSST data stream in near real time, with full-dataset reprocessings annually.

In this paper, we review the science goals and the technical design of the LSST, focusing on the data management system. We describe its software stack and the data products it will generate. Finally, we discuss the exciting opportunities this new code-base represents both for LSST, and the astronomical software community as a whole.

1. The Large Synoptic Survey Telescope

The Large Synoptic Survey Telescope (LSST; <http://lsst.org>) is an automated astronomical survey system that will survey approximately $10,000 \text{ deg}^2$ of the sky every few nights in six optical bands from 320 to 1050 nm (Ivezic et al. 2008), covering about $18,000 \text{ deg}^2$ over 800 times over its 10-year lifetime. It will explore a wide range of astrophysical questions, ranging from discovering “killer” asteroids, to examining the nature of Dark Energy.

The LSST consists of a large-aperture, wide-field, ground-based telescope currently being constructed on the El Peñón peak of Cerro Pachón in the Chilean Andes, a 3.2 gigapixel camera, presently being constructed by a collaboration of institutions led by the SLAC National Laboratory, and a data management system, also currently under construction.

The LSST will produce on average 15 terabytes of data per night, yielding an (uncompressed) data set of over 100 petabytes at the end of its 10-year mission. To enable the wide variety of planned science, the LSST Project is leading the construction of a new, general-purpose, high-performance, scalable, well documented, open source data processing software stack for O/IR surveys. Prototypes of this stack are already capable of processing data from existing cameras (e.g., SDSS, DECam, MegaCam), and form the basis of the Hyper Supreme-Cam (HSC) Survey data reduction pipeline. In the 2020's, running on dedicated HPC facilities, this system will enable us to process the LSST data stream in near real time, with full-dataset reprocessings on annual scale.

2. The LSST Data Management System

The rapid cadence and scale of the LSST observing program will produce approximately 15 TB per night of raw imaging data¹. The large data volume, the real-time aspects, and the complexity of processing involved makes it impractical to defer the data reduction to the LSST end-users. Instead, the data collected by the LSST system will be automatically reduced to scientifically useful catalogs and images by the LSST Data Management (DM) system.

The principal functions of the LSST Data Management system are to:

¹For comparison, the volume of all imaging data collected over a decade and published in SDSS Data Release 7 (Abazajian et al. 2009) is approximately 16 TB.

- Process, in real time, the incoming stream of images generated by the camera system during observing by archiving raw images, generating alerts to new sources or sources whose properties have changed significantly, and updating the relevant catalogs (“Level 1” data products; § 4).
- Periodically process the accumulated survey data to provide a uniform photometric and astrometric calibration, measure the properties of all detected objects, and characterize objects based on their time-dependent behavior. The results of such a processing run form a *Data Release* (DR), which is a static, self-consistent data set suitable for use in performing scientific analyses of LSST data and publication of the results (the “Level 2” data products; § 4). All data releases will be archived for the entire operational life of the LSST archive (though only the two most recent releases will be available online).
- Facilitate the creation of added-value (“Level 3”; § 4) data products, by providing suitable software, application programming interfaces (APIs), and computing infrastructure at the LSST data access centers.
- Make all LSST data available to the community through an interface that utilizes community-based standards to the maximum possible extent. Provide enough processing, storage, and network bandwidth to enable user analyses of the data without the need for petabyte-scale data transfers.

Over the ten years of LSST operations and 11 data releases, this processing will result in a cumulative *processed* data size approaching 500 petabytes (PB) for imaging, and over 50 PB for the catalog databases. The final data release catalog database alone is expected to be approximately 15 PB in size.

The data management system is conceptually divided into three layers: an infrastructure layer consisting of the computing, storage, and networking hardware and system software; a middleware layer, which handles distributed processing, data access, user interface, and system operations services; and an applications layer, which includes the data pipelines and products and the science data archives (see Fig. 1).

Physically, the DM system components will span four key facilities on three continents: the Summit Facility at Cerro Pachón (where the initial detector cross-talk correction will be performed), the Base Facility in La Serena (which will serve as a retransmission hub for data uploads to North America, as well as the data access center for the Chilean community), the central Archive Facility at the National Center for Supercomputing Applications (NCSA) in Champaign, Illinois, and a satellite data processing center at Centre de Calcul de l’Institut National de Physique Nucléaire et de Physique des Particules (CC-IN2P3) in Lyon, France. All Level 1 (nightly) and 50% of Level 2 (data release) processing will take place at the Archive Facility, which will also serve as a data access center for the US community. The remaining 50% of data processing will be performed at the satellite center in Lyon.

The data will be transported between the centers over existing and new high-speed optical fiber links from South America to the U.S. (see Fig. 2). Although the data processing center will have substantial computing power (e.g., the central facility will peak at ~ 1.6 petaflops of compute power), the continuation of current trends suggests that the center will not qualify for the top 500 list by the time of first light, and carry an



Figure 1. The three-layered architecture of the data management system (application [red, top], middleware [purple, middle], and infrastructure [blue, bottom] layers) enables scalability, reliability, and evolutionary capability.

small technological risk to the project.

A novel aspect of the LSST DM system will be its “Level 3” capabilities, allowing the end-users to create, store, and share custom data products not created by standard LSST processing. These could be new catalogs created by simple post-processing of the LSST data release catalogs, or entirely new data products generated by running custom code on raw LSST data. The LSST software stack (described below) will be made available to LSST end-users, as a basis on which to quickly build such code. Approximately 10% of the total budget for the LSST Archive Center compute and storage capacity has been reserved for end-user, Level 3, processing support infrastructure².

²Furthermore, the data management system architecture will enable Level 3 tasks to “piggyback” onto annual Level 2 reprocessings, leveraging considerable I/O and computing resources employed in the production of a data release.

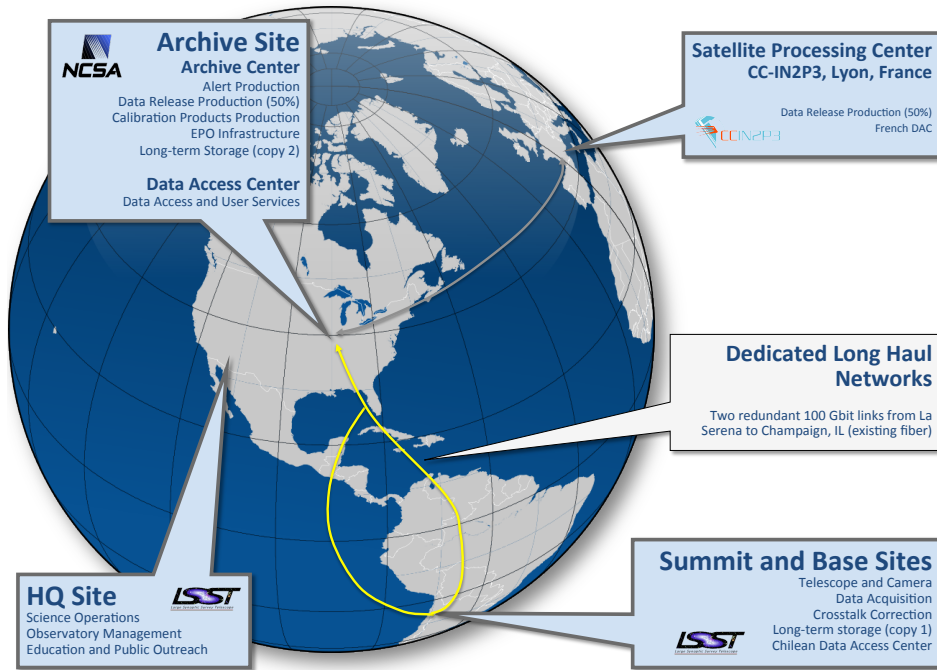


Figure 2. The LSST data flow from the mountain summit/base facility in Chile to the data access center and archive centers in the U.S. and France.

3. The LSST software stack

The *LSST Software Stack* aspires to be a well documented, state-of-the-art, high-performance, scalable, multi-camera, open source, O/IR survey data processing and analysis system, built to enable LSST survey data reduction and the writing of custom, user-driven, code for Level 3 processing. Once completed, it will comprise of all science pipelines needed to accomplish LSST data processing tasks (e.g., calibration, single frame processing, co-addition, image differencing, multi-epoch measurement, asteroid orbit determination, etc.), the necessary data access and orchestration middleware, as well as the database and user interface components.

Algorithm development for the LSST software is building on the expertise and experience of prior large astronomical surveys, such as SDSS (York et al. 2000), Pan-STARRS (Magnier 2006), DES (Petravick et al.), SuperMACHO (Becker et al. 2005), ESSENCE (Miknaitis et al. 2007), DLS (Wittman et al. 2002), CFHT-LS (Heymans et al. 2012; Miller et al. 2013; Gwyn 2012), and UKIDSS (Lawrence et al. 2007) to name a few, as well as software tools (e.g., SExtractor, Bertin & Arnouts 1996). The pipelines written for these surveys have demonstrated that it is possible to carry out largely autonomous data reduction of large data sets, automated detection of sources and objects, and the extraction of scientifically useful characteristics of those objects. While firmly footed in this prior history, the LSST software stack has largely been written anew, for reasons of performance, extendability, and maintainability. All LSST codes are being developed with the intent of following software engineering best prac-

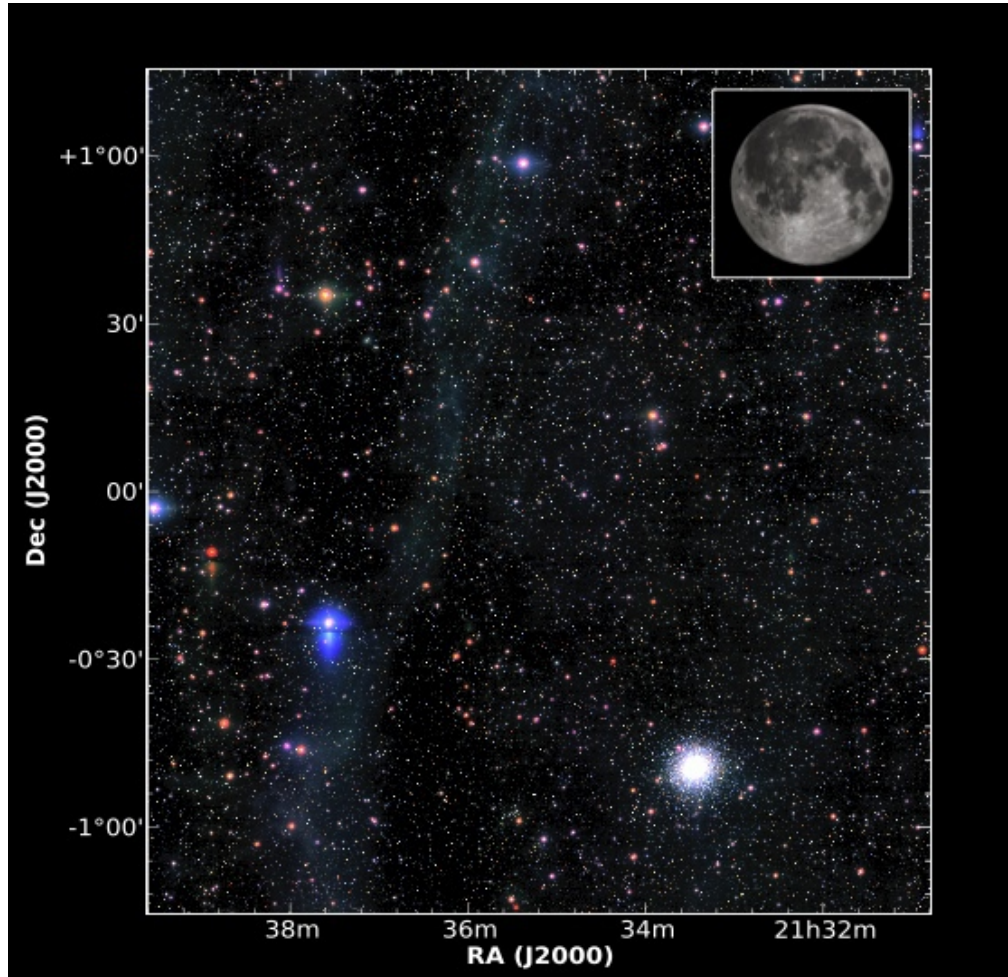


Figure 3. A *gri* color composite of a small region in the vicinity of globular cluster M2, taken from a co-add of SDSS Stripe 82 data produced with LSST software stack prototypes. The co-addition employs a novel “background matching” technique (Huff et al. 2014) that improves background estimation and preserves the diffuse structures in the resulting co-add. The image of the Moon has been inserted for scale. The full co-add can be browsed at <http://moe.astro.washington.edu/sdss>.

tices, including modularity, clear definition of interfaces, continuous integration, utilization of unit testing, a single set of documentation and coding standards, and others. The primary user-facing implementation language is Python and, where necessary for performance reasons or when the algorithms require access to complex data structures, C++. See the contribution by Jenness (2016) in this conference for more discussion on the architecture of the LSST software stack.

The LSST data management software has been prototyped for over eight years. It has been exercised in eight data challenges, with increasing degrees of complexity. Besides processing simulated LSST data (§ ??), it has been used to process images from CFHTLS and SDSS (Abazajian et al. 2009). As an example, Figure 3 shows a small

region in the vicinity of M2 taken from a large co-addition of SDSS Stripe 82 data, generated with LSST software stack prototypes. Furthermore, the current development versions of the LSST software stack form the basis for the data processing pipelines of the Subaru Hyper-Suprime Cam Survey (?), and have successfully used to produce two data releases of HSC-S data (?).

4. LSST Data Products

Data collected by the LSST telescope and camera will be automatically processed to *data products* – catalogs, alerts, and reduced images – by the LSST Data Management system (§ 2). These products are designed to be sufficient to enable a large majority of LSST science cases, without the need to work directly with the raw pixels. We give a high-level overview of the LSST data products here; further details may be found in the LSST Data Products Definition Document (Juric et al. 2013).

Two major categories of data products will be produced and delivered by LSST DM:

- **Level 1 data products**, designed to support the discovery, characterization, and rapid follow-up of time-dependent phenomena (“transient science”). These will be generated continuously every observing night, by detecting and characterizing sources in images differenced against deep templates. They will include alerts to objects that were newly discovered, or have changed brightness or position at a statistically significant level. The alerts to such events will be published within 60 seconds of observation.

In addition to transient science, Level 1 data products will support discovery and follow-up of objects in the Solar System. Objects with motions sufficient to cause trailing in a single exposure will be identified and flagged as such when the alerts are broadcast. Those that are not trailed will be identified and linked based on their motion from observation to observation, over a period of a few days. Their orbits will be published within 24 hours of identification. The efficiency of linking (and thus the completeness of the resulting orbit catalog) will depend on the final observing cadence chosen for LSST, as well as the performance of the linking algorithm (?).

- **Level 2 data products** are designed to enable systematics- and flux-limited science, and will be made available in annual Data Releases. These will include the (reduced and raw) single-epoch images, deep co-adds of the observed sky, catalogs of objects detected in LSST data, catalogs of sources (the detections and measurements of objects on individual visits), and catalogs of “forced sources” (measurements of flux on individual visits at locations where objects were detected by LSST or other surveys). LSST data releases will also include fully reprocessed Level 1 data products, as well as all metadata and software necessary for the end-user to reproduce any aspect of LSST data release processing.

A noteworthy aspect of LSST Level 2 processing is that it will largely rely on

multi-epoch model fitting, or *MultiFit*, to perform near-optimal characterization of object properties. That is, while the co-adds will be used to perform object *detection*, the *measurement* of their properties will be performed by simultaneously fitting (PSF-convolved) models to single-epoch observations. An extended source model – a constrained linear combination of two Sérsic profiles – and a point source model with proper motion – will generally be fitted to each detected object³.

Secondly, for the extended source model fits, the LSST will characterize and store the shape of the associated likelihood surface (and the posterior), and not just the maximum likelihood values and covariances. The characterization will be accomplished by sampling, with up to ~200 (independent) likelihood samples retained for each object. For storage cost reasons, these samples may be retained only for those bands of greatest interest for weak lensing studies.

While a large majority of science cases will be adequately served by Level 1 and 2 data products, a limited number of highly specialized investigations may require custom, user-driven, processing of LSST data. This processing will be most efficiently performed at the LSST Archive Center, given the size of the LSST data set and the associated storage and computational challenges. To enable such use cases, the LSST DM system will devote the equivalent of 10% of its processing and storage capabilities to creation, use, and federation of **Level 3** (user-created) data products. It will also allow the science teams to use the LSST database infrastructure to store and share their results.

To further enable user-driven Level 3 processing, the LSST software stack has been explicitly designed with reusability and extendability in mind, and will be made available to the LSST user community (§ 3). This will allow the LSST users to more rapidly develop custom Level 3 processing codes, leveraging 15+ years of investment and experience put into LSST codes. In addition to executing such customized codes at the LSST data centers, LSST users will be able to run it on their own computational resources as well.

5. Summary

The LSST has been envisioned as a highly automated survey system, designed to enable investigations of phenomena on timescales ranging from minutes to years, with flux limits from $r \sim 24.5$ (single visit) to 27.5 (coadded), and spanning approximately half the sky (LSST Science Collaboration 2009). A comprehensive data management system, such as the one described in this paper, is necessary to make possible the research expected of such a system.

Though built to enable LSST science, we are hopeful that the individual components of LSST data management system – and especially the software stack – will be of broader utility. The LSST software stack is free software, licensed under the terms of

³For performance reasons, it is likely that only the point source model will be fitted in the most crowded regions of the Galactic plane.

the GNU General Public License, Version 3. The stack prototype code and documentation are available via <http://ls.st/ug>. Its open source nature, an open development process, a long-term project commitment and a design that can be modified for use with other cameras may make it useful for the processing of imaging data beyond LSST.

Acknowledgments. This material is based upon work supported in part by the National Science Foundation through Cooperative Support Agreement (CSA) Award No. AST-1227061 under Governing Cooperative Agreement 1258333 managed by the Association of Universities for Research in Astronomy (AURA), and the Department of Energy under Contract No. DE-AC02-76SF00515 with the SLAC National Accelerator Laboratory. Additional LSST funding comes from private donations, grants to universities, and in-kind support from LSSTC Institutional Members.

References

- Abazajian, K. N., Adelman-McCarthy, J. K., Agüeros, M. A., Allam, S. S., Allende Prieto, C., An, D., Anderson, K. S. J., Anderson, S. F., Annis, J., Bahcall, N. A., & et al. 2009, *ApJS*, 182, 543. 0812.0649
- Becker, A. C., et al. 2005, in *Gravitational Lensing Impact on Cosmology*, edited by Y. Mellier, & G. Meylan, vol. 225 of *IAU Symposium*, 357. [astro-ph/0409167](#)
- Bertin, E., & Arnouts, S. 1996, *A&AS*, 117, 393
- Gwyn, S. D. J. 2012, *AJ*, 143, 38
- Heymans, C., Van Waerbeke, L., Miller, L., Erben, T., Hildebrandt, H., Hoekstra, H., Kitching, T. D., Mellier, Y., Simon, P., Bonnett, C., Coupon, J., Fu, L., Harnois Dérap, J., Hudson, M. J., Kilbinger, M., Kuijken, K., Rowe, B., Schrabback, T., Semboloni, E., van Uitert, E., Vafaei, S., & Velander, M. 2012, *MNRAS*, 427, 146. 1210.0032
- Huff, E. M., Hirata, C. M., Mandelbaum, R., Schlegel, D., Seljak, U., & Lupton, R. H. 2014, *MNRAS*, 440, 1296
- Ivezic, Z., et al. 2008, *ArXiv e-prints*. [arXiv:0805.2366](#)
- Jenness, T. 2016, in *ADASS XXV*, edited by N. P. F. Lorente, & K. Shortridge (San Francisco: ASP), vol. TBD of *ASP Conf. Ser.*, TBD
- Juric, M., et al. 2013, *Large Synoptic Survey Telescope Data Products Definition Document*, LSE-163, <http://ls.st/LSE-163>
- Lawrence, A., et al. 2007, *MNRAS*, 379, 1599. [astro-ph/0604426](#)
- LSST Science Collaboration 2009, *ArXiv e-prints*. [arXiv:0912.0201](#)
- Magnier, E. 2006, in *The Advanced Maui Optical and Space Surveillance Technologies Conference*, 50
- Miknaitis, G., et al. 2007, *ApJ*, 666, 674. [astro-ph/0701043](#)
- Miller, L., Heymans, C., Kitching, T. D., van Waerbeke, L., Erben, T., Hildebrandt, H., Hoekstra, H., Mellier, Y., Rowe, B. T. P., Coupon, J., Dietrich, J. P., Fu, L., Harnois-Déraps, J., Hudson, M. J., Kilbinger, M., Kuijken, K., Schrabback, T., Semboloni, E., Vafaei, S., & Velander, M. 2013, *MNRAS*, 429, 2858. 1210.8201
- Petravick, D., et al. *Dark Energy Survey Data Management*, <https://opensource.ncsa.illinois.edu/confluence/display/DESDM/The+Dark+Energy+Survey+Data+Management+Proj>
- Wittman, D. M., Tyson, J. A., Dell’Antonio, I. P., Becker, A., Margoniner, V., Cohen, J. G., Norman, D., Loomba, D., Squires, G., Wilson, G., Stubbs, C. W., Hennawi, J., Spergel, D. N., Boeshaar, P., Clocchiatti, A., Hamuy, M., Bernstein, G., Gonzalez, A., Guhathakurta, P., Hu, W., Seljak, U., & Zaritsky, D. 2002, in *Survey and Other Telescope Technologies and Discoveries*, edited by J. A. Tyson, & S. Wolff, vol. 4836 of *Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series*, 73. [astro-ph/0210118](#)
- York, D. G., et al. 2000, *AJ*, 120, 1579. [astro-ph/0006396](#)