ASSIGNMENT/ASSESSMENT ITEM COVER SHEET

Student Name:

| **FIRST NAME** | **FAMILY / LAST NAME** |

Student Number: Email:

| **Course Code** | **Course Title** |

(Example)

A	B	C	D	1	2	3	4

(Example)

Intro to University

Campus of Study: (eg Callaghan, Ourimbah, Port Macquarie)

Assessment Item Title: Due Date/Time:

Tutorial Group (If applicable):   Word Count (If applicable):

Lecturer/Tutor Name:

Extension Granted: Yes   No   Granted Until:

Please attach a copy of your extension approval

NB: STUDENTS MAY EXPECT THAT THIS ASSIGNMENT WILL BE RETURNED WITHIN 3 WEEKS OF THE DUE DATE OF SUBMISSION

Please tick box if applicable

Students within the Faculty of Business and Law, Faculty of Science and Information Technology, Faculty of Engineering and Built Environment and the School of Nursing and Midwifery:
I verify that I have completed the online Academic Q c^*¦ã Module and adhered to its principles

Students within the School of Education:
"I understand that a minimum standard of correct referencing and academic literacy is required to pass all written assignments in the School of Education; and I have read and understood the School of Education *Course Outline Policy Supplement,* which includes important information related to assessment policies and procedures.

I declare that this assessment item is my own work unless otherwise acknowledged and is in accordance with the University's academic integrity policy available from the Policy Library on the web at http://www.newcastle.edu.au/policylibrary/000608.html
I certify that this assessment item has not been submitted previously for academic credit in this or any other course. I certify that I have not given a copy or have shown a copy of this assessment item to another student enrolled in the course.

I acknowledge that the assessor of this assignment may, for the purpose of assessing this assignment:
- Reproduce this assessment item and provide a copy to another member of the Faculty; and/or
- Communicate a copy of this assessment item to a plagiarism checking service (which may then retain a copy of the item on its database for the purpose of future plagiarism checking).
- Submit the assessment item to other forms of plagiarism checking.

I certify that any electronic version of this assessment item that I have submitted or will submit is identical to this paper version.

DATE STAMP HERE

Insert this way

Turnitin ID:
(if applicable)

Signature: _____ Date:

Assignment 2

Question 1

a. For the 3 hosts we can choose any figure from 0-24 as the port, provided that each host has a different port.
Host 1: 192.168.1.0
Host 2: 192.168.1.1
Host 3: 192.168.1.2

b. To build the NAT translation table we need the endpoints of each TCP connection. In the example, one endpoint is the home network (hosts) on the LAN side and the other endpoint is sent as a destination address to the ISP.

NAT Translation Table	
WAN side	LAN side
128.120.41.85, 80	192.168.1.0
128.120.41.85, 80	192.168.1.0
128.120.41.85, 80	192.168.1.1
128.120.41.85, 80	192.168.1.1
128.120.41.85, 80	192.168.1.2
128.120.41.85, 80	192.168.1.2

Question 2

Note that for this three-node topology, the value of the costliest path (5) is less than the combined cost of the other 2 paths (4+2). The least costly path will always consist of 1 hop.

Node N1 Table

Cost to

	N1	N2	N3
N1	0	4	5
N2	∞	∞	∞
N3	∞	∞	∞

From

Cost to

	N1	N2	N3
N1	0	4	5
N2	4	0	2
N3	5	2	0

From

Node N2 Table

Cost to

	N1	N2	N3
N1	∞	∞	∞
N2	4	0	2
N3	∞	∞	∞

From

Cost to

	N1	N2	N3
N1	0	4	5
N2	4	0	2
N3	5	2	0

From

Node N3 Table

Cost to

	N1	N2	N3
N1	∞	∞	∞
N2	∞	∞	∞
N3	5	2	0

From

Cost to

	N1	N2	N3
N1	0	4	5
N2	4	0	2
N3	5	2	0

From

Question 3

Dijkstra's Algorithm

N' = the subset of nodes with known least-cost path.
$D(n)$ = current least-cost path from source to destination n.
$c(w,n)$ = link cost from node w to node n.
$p(n)$ = previous node along current last-cost path from source to w.

Initialise:
$N' = \{w\}$
for each node n
    if n adjacent to w, $D(n) = c(w,n)$
    else, $D(n) = \infty$

Loop:
Until all nodes in N':
    Find node o with minimum $D(o)$ and add that to N'.
    Update $D(n)$ for each node n adjacent to o and not in N'.
        $D(n) = min(D(n), D(o) + c(n,o))$

Table of Results

Step	N'	$D(x)$, $p(x)$	$D(u)$, $p(u)$	$D(v)$, $p(v)$	$D(t)$, $p(t)$	$D(y)$, $p(y)$	$D(z)$, $p(z)$
0	w	4,w	1,w	8,w	∞	∞	∞
1	wu			5,u	8,u	∞	∞
2	wux					7,x	5,x
2	wuxv						
3	wuxvz						
4	wuxvzy						
5	wuxvzyt						

Forwarding Table in w

Destination	Link
u	(w, u)
x	(w, x)
v	(w, u)
z	(w, x)
y	(w, x)
t	(w, u)

Question 4

a. The suffixes of the IP addresses of the interfaces can be arbitrarily chosen, as long as they are unique.
   Subnet 1:
   Router -> Subnet 2 = 101.101.101.001
   A = 101.101.101.002
   B = 101.101.101.003

   Subnet 2:
   Router -> Subnet 1 = 102.102.102.001
   C = 102.102.102.002
   D = 102.102.102.003
   Router -> Subnet 3 = 102.102.102.004

   Subnet 3:
   Router -> Subnet 2 = 103.103.103.001
   E = 103.103.103.002
   F = 103.103.103.003

b. MAC addresses are 48-bits long – 6 groups of 2 hexadecimal digits. They can also be arbitrarily chosen, as long as they are unique.
   Subnet 1:
   Left Router – Subnet 1-side = 11-11-11-AA-AA-AA
   Host A = 11-11-11-BB-BB-BB
   Host B = 11-11-11-CC-CC-CC

   Subnet 2:
   Left Router – Subnet 2-side = 22-22-22-AA-AA-AA
   Host C = 22-22-22-BB-BB-BB
   Host D = 22-22-22-CC-CC-CC
   Right Router – Subnet 2-side = 22-22-22-DD-DD-DD

   Subnet 3:
   Right Router – Subnet 3-side = 33-33-33-AA-AA-AA
   Host E = 33-33-33-BB-BB-BB
   Host F = 33-33-33-CC-CC-CC

c. From host B to host F:
   (i)   From host B to left router:
         MAC addresses
             Source: 11-11-11-CC-CC-CC
             Destination: 11-11-11-AA-AA-AA
         IP addresses
             Source: 101.101.101.003
             Destination: 101.101.101.001
   (ii) From left router to right router:
         MAC addresses

> *Source*: 22-22-22-AA-AA-AA
> *Destination*: 22-22-22-DD-DD-DD
> IP addresses
> *Source:* 102.102.102.001
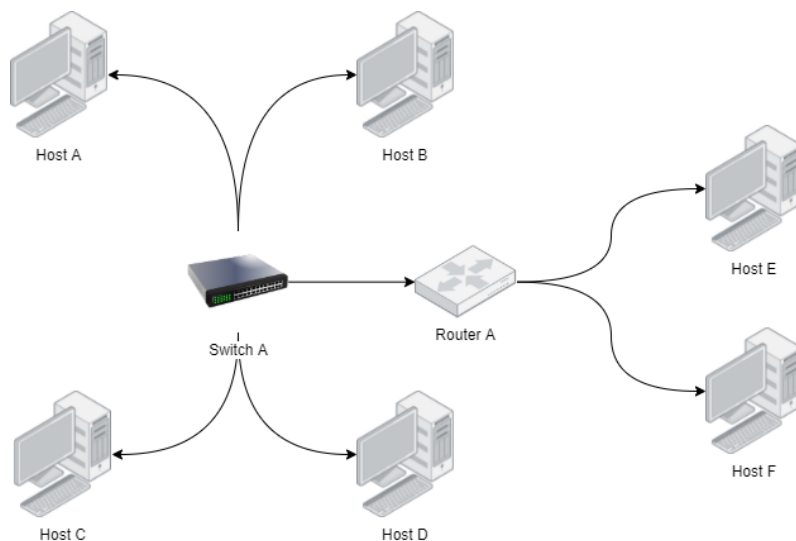> *Destination:* 102.102.102.004

(iii)   From right router to host F:
> MAC addresses
> *Source*: 33-33-33-AA-AA-AA
> *Destination*: 33-33-33-CC-CC-CC
> IP addresses
> *Source:* 103.103.103.001
> *Destination:* 103.103.103.003

d. Switches and routers work similarly as both use a store-and-forward model.
    However, switches are used as a bridge rather than a defined endpoint. They lack
    IP addresses and operate entirely using MAC addresses.
    Updating the model diagram gives us:

Assuming all MAC and IP address remain the same:

(iv) Host B to router:
> MAC addresses
> *Source*: 11-11-11-CC-CC-CC
> *Destination*: 22-22-22-DD-DD-DD
> IP addresses
> *Source:* 101.101.101.003
> *Destination:* 102.102.102.004

(v) Router to Host F:
> MAC addresses
> *Source*: 33-33-33-AA-AA-AA
> *Destination*: 33-33-33-CC-CC-CC
> IP addresses
> *Source:* 103.103.103.001
> *Destination:* 103.103.103.003

Question 5

Physical Layer

The first step is to ensure the host PC is connected to a network. In this case we use an Ethernet cable to connect to the router.

From now the host PC will be referred to as the **client** and the owner of the Webpage will be the **server**.

The host requires a Media Access Control (MAC) address to receive frames/datagrams from other hosts, and an Internet Protocol (IP) address to send and receive requests.

When the host joins the network, it will be dynamically assigned an IP address using the Dynamic Host Configuration Protocol (DHCP). This process consists of 4 messages. Note that if a DHCP server is already known to the host, the first 2 steps can be skipped:

- *DHCP discover:* The host searches for a DNCP server
- *DHCP offer:* A valid DNCP server replies with an offered IP address.
- *DHCP request:* The host requests the address.
- *DHCP ack:* The server sends the address.

MAC addresses will NOT be generated with DHCP, but they can be manually added.

It is important to note that datagrams sent from a local network will have the same IP address. Individual devices are effectively invisible to foreign networks, which is a security boon. The network router/switch will direct responses to the appropriate host.

Before data is exchanged between the endpoints, a connection is established using a transport protocol. The TCP protocol is used for HTTP requests/responses.
First, the client sends a connection request. If the address is accurate and the request is acknowledged, the server will return an "accept" notification to the client. Then the client will send the HTTP request.

The client generates the HTTP request. This request contains information such as the destination address, the request type (GET, POST, PUT, etc.)

The user will input the address of the web page they want to download. For this to be usable, the address name will need to be converted to an IP address. This is where the Domain Name System (DNS) comes into play. The DNS is an application-layer protocol that translates the address entered by humans into the IP address used for address datagrams. It does this by searching server-by-server, either through an iterated or recursive query. If the correct server is tracked down, the IP address of that server is added to the request.

The request will be sent to the destination address through the router/switch. The server will generate a HTTP response containing, amongst other things, the source/destination addresses, response status (such as Success-200, Forbidden-401, etc) and the audio/visual/textual objects that make up the web page.

The response is passed back to the network router. The server containing the webpage does not know the exact port of the recipient, so the router determines the correct host and

sends the reply to them. The client will now be able to load the webpage if the response was successful.

To acquire the MAC address of a host, a broadcast message is sent to the LAN. Using the Address Resolution Protocol (ARP), an ARP table will be consulted. This table matches MAC addresses to IP addresses, allowing datagrams to be sent from the router/switch to specific hosts.