Data Hazards in ALU Instructions

- Consider this sequence:

```
sub $2, $1,$3
and $12,$2,$5
or  $13,$6,$2
add $14,$2,$2
sw  $15,100($2)
```

- We can resolve hazards with forwarding
  - How do we detect when to forward?

CSULB

Dependencies & Forwarding

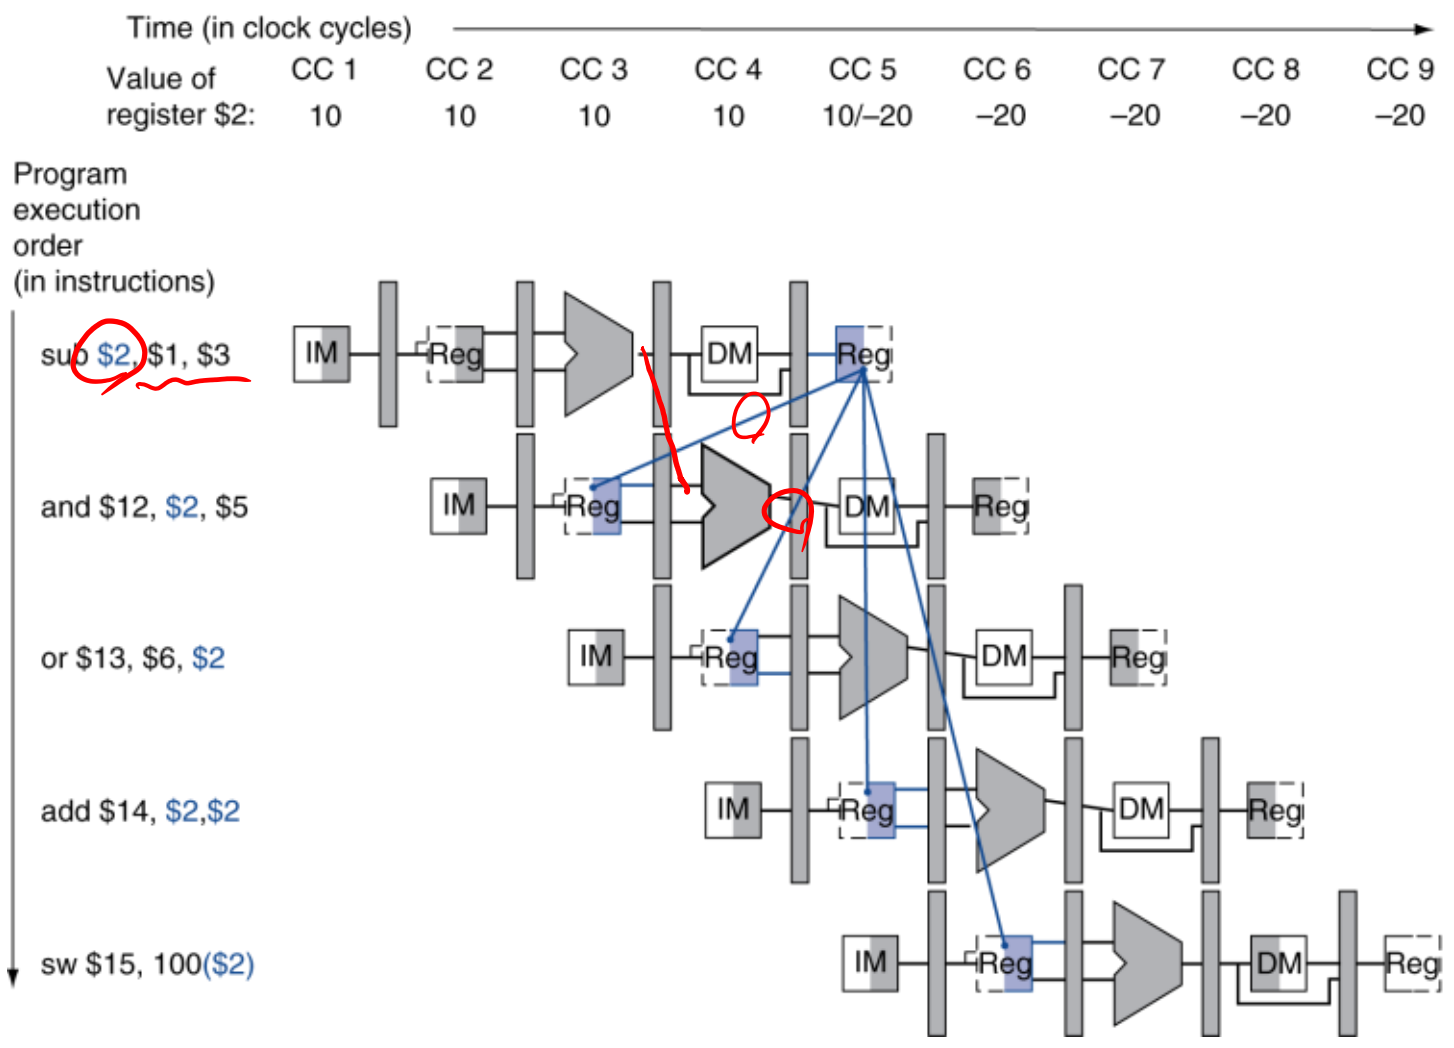

CSULB

Detecting the Need to Forward

- Pass register numbers along pipeline
  - e.g., ID/EX.RegisterRs = register number for Rs sitting in ID/EX pipeline register
- ALU operand register numbers in EX stage are given by
  - ID/EX.RegisterRs, ID/EX.RegisterRt
- Data hazards when
  1a. EX/MEM.RegisterRd = ID/EX.RegisterRs
  1b. EX/MEM.RegisterRd = ID/EX.RegisterRt
  2a. MEM/WB.RegisterRd = ID/EX.RegisterRs
  2b. MEM/WB.RegisterRd = ID/EX.RegisterRt

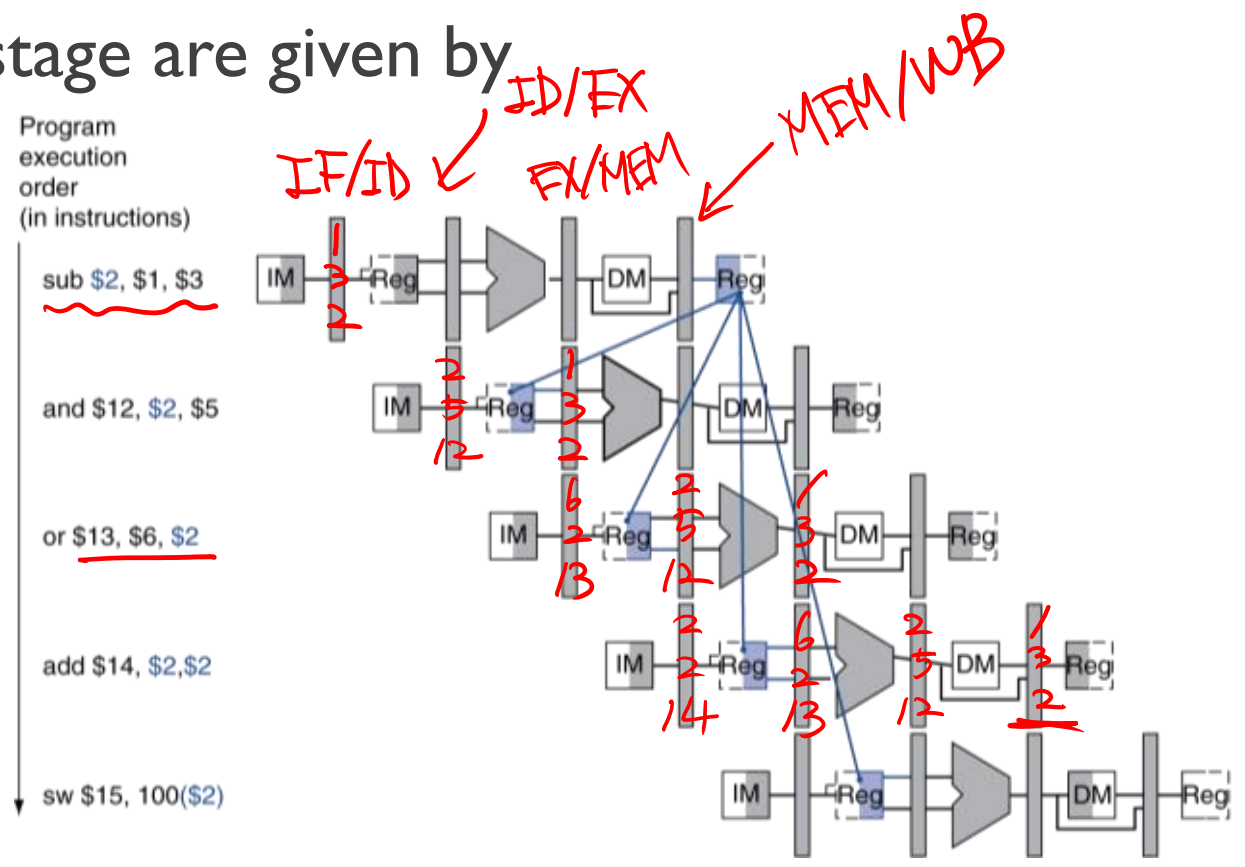

CSULB

Detecting the Need to Forward

- But only if forwarding instruction will write to a register!
  - EX/MEM.RegWrite, MEM/WB.RegWrite
- And only if Rd for that instruction is not $zero
  - EX/MEM.RegisterRd ≠ 0,
    MEM/WB.RegisterRd ≠ 0

CSULB

Forwarding Conditions

- EX hazard
  - if (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 10
  - if (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 10
- MEM hazard
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and (MEM/WB.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 01
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and (MEM/WB.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 01

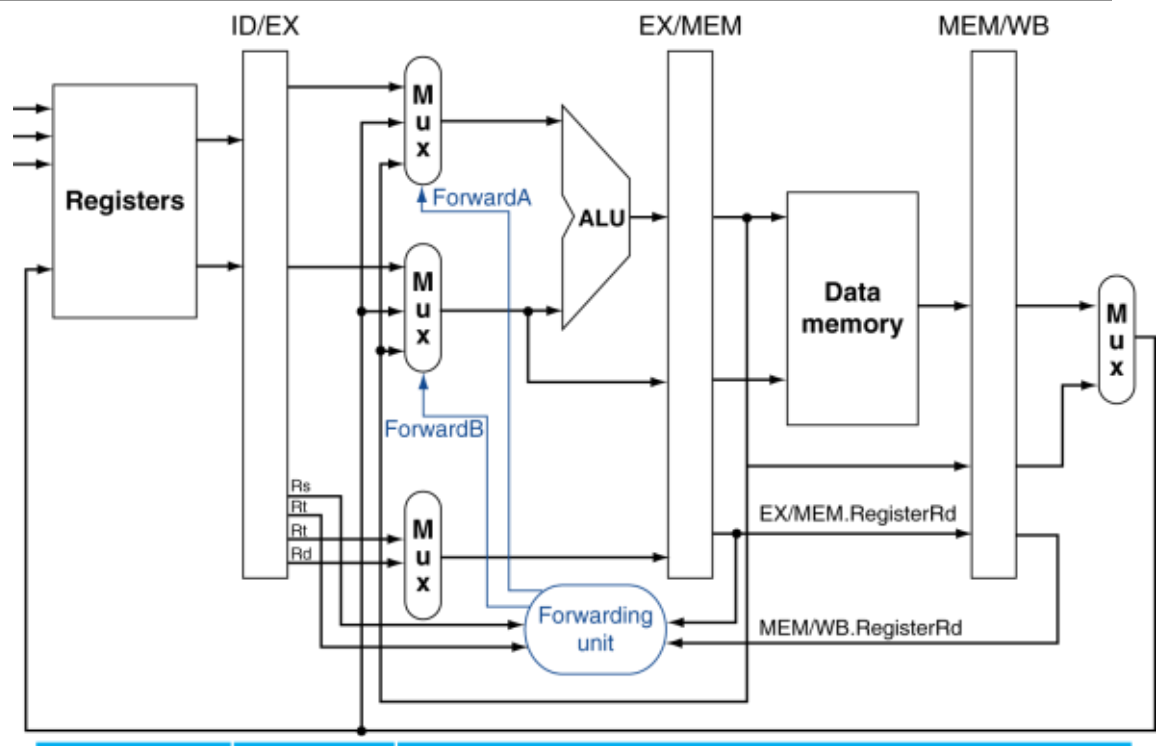

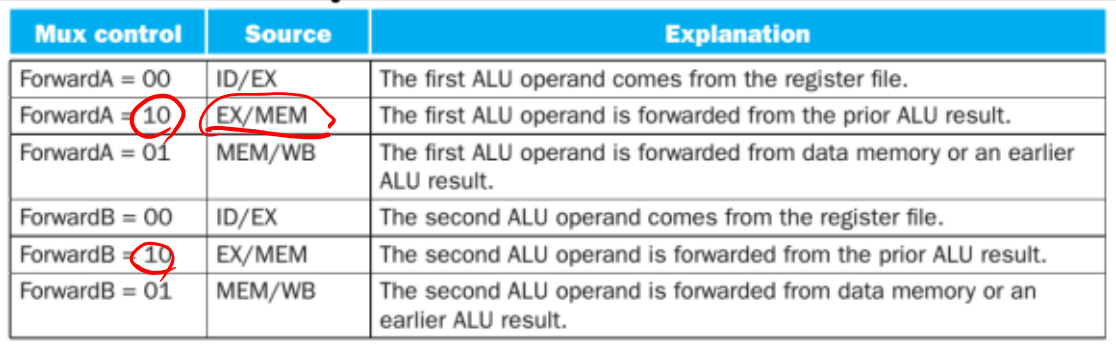

Mux control	Source	Explanation
ForwardA = 00	ID/EX	The first ALU operand comes from the register file.
ForwardA = 10	EX/MEM	The first ALU operand is forwarded from the prior ALU result.
ForwardA = 01	MEM/WB	The first ALU operand is forwarded from data memory or an earlier ALU result.
ForwardB = 00	ID/EX	The second ALU operand comes from the register file.
ForwardB = 10	EX/MEM	The second ALU operand is forwarded from the prior ALU result.
ForwardB = 01	MEM/WB	The second ALU operand is forwarded from data memory or an earlier ALU result.

Double Data Hazard

- Consider the sequence:

```
add $1,$1,$2
add $1,$1,$3
add $1,$1,$4
```

- Both hazards occur
  - Want to use the most recent
- Revise MEM hazard condition
  - Only fwd if EX hazard condition isn’t true

```
add $1,$1,$2
add $1,$1,$3
add $1,$1,$4
```

Revised Forwarding Condition

- MEM hazard
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and not (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRs))
    and (MEM/WB.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 01
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and not (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRt))
    and (MEM/WB.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 01

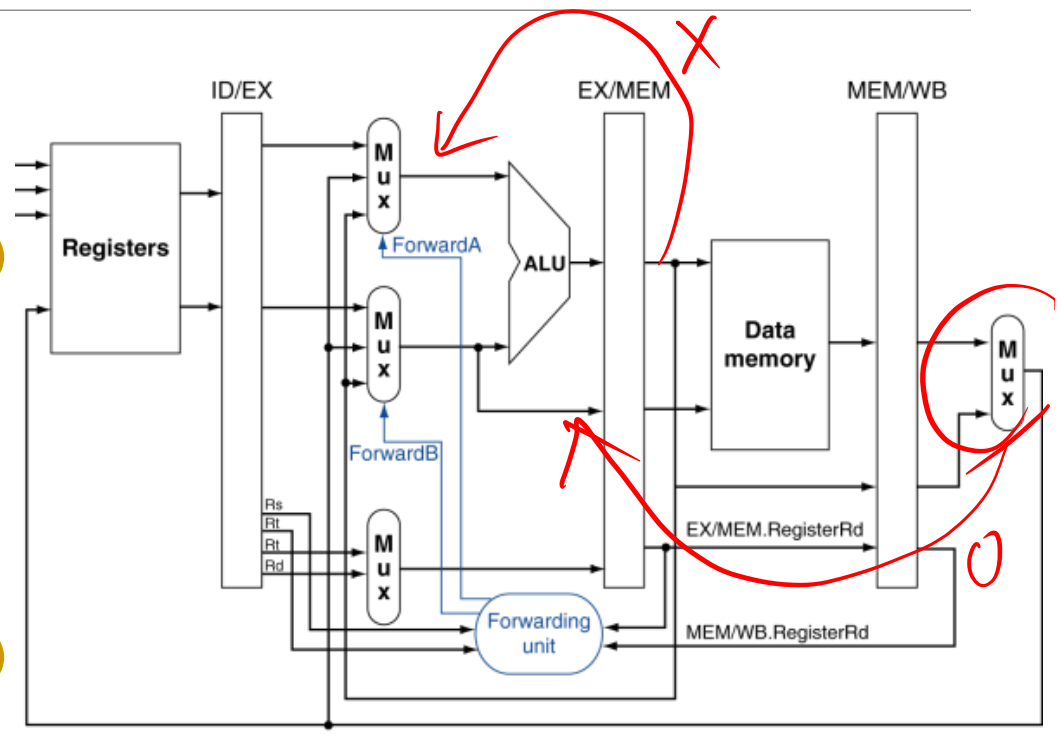

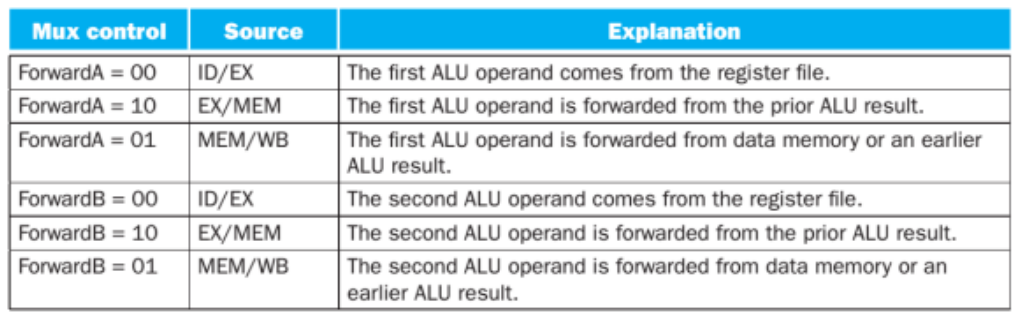

Mux control	Source	Explanation
ForwardA = 00	ID/EX	The first ALU operand comes from the register file.
ForwardA = 10	EX/MEM	The first ALU operand is forwarded from the prior ALU result.
ForwardA = 01	MEM/WB	The first ALU operand is forwarded from data memory or an earlier ALU result.
ForwardB = 00	ID/EX	The second ALU operand comes from the register file.
ForwardB = 10	EX/MEM	The second ALU operand is forwarded from the prior ALU result.
ForwardB = 01	MEM/WB	The second ALU operand is forwarded from data memory or an earlier ALU result.

Datapath with Forwarding

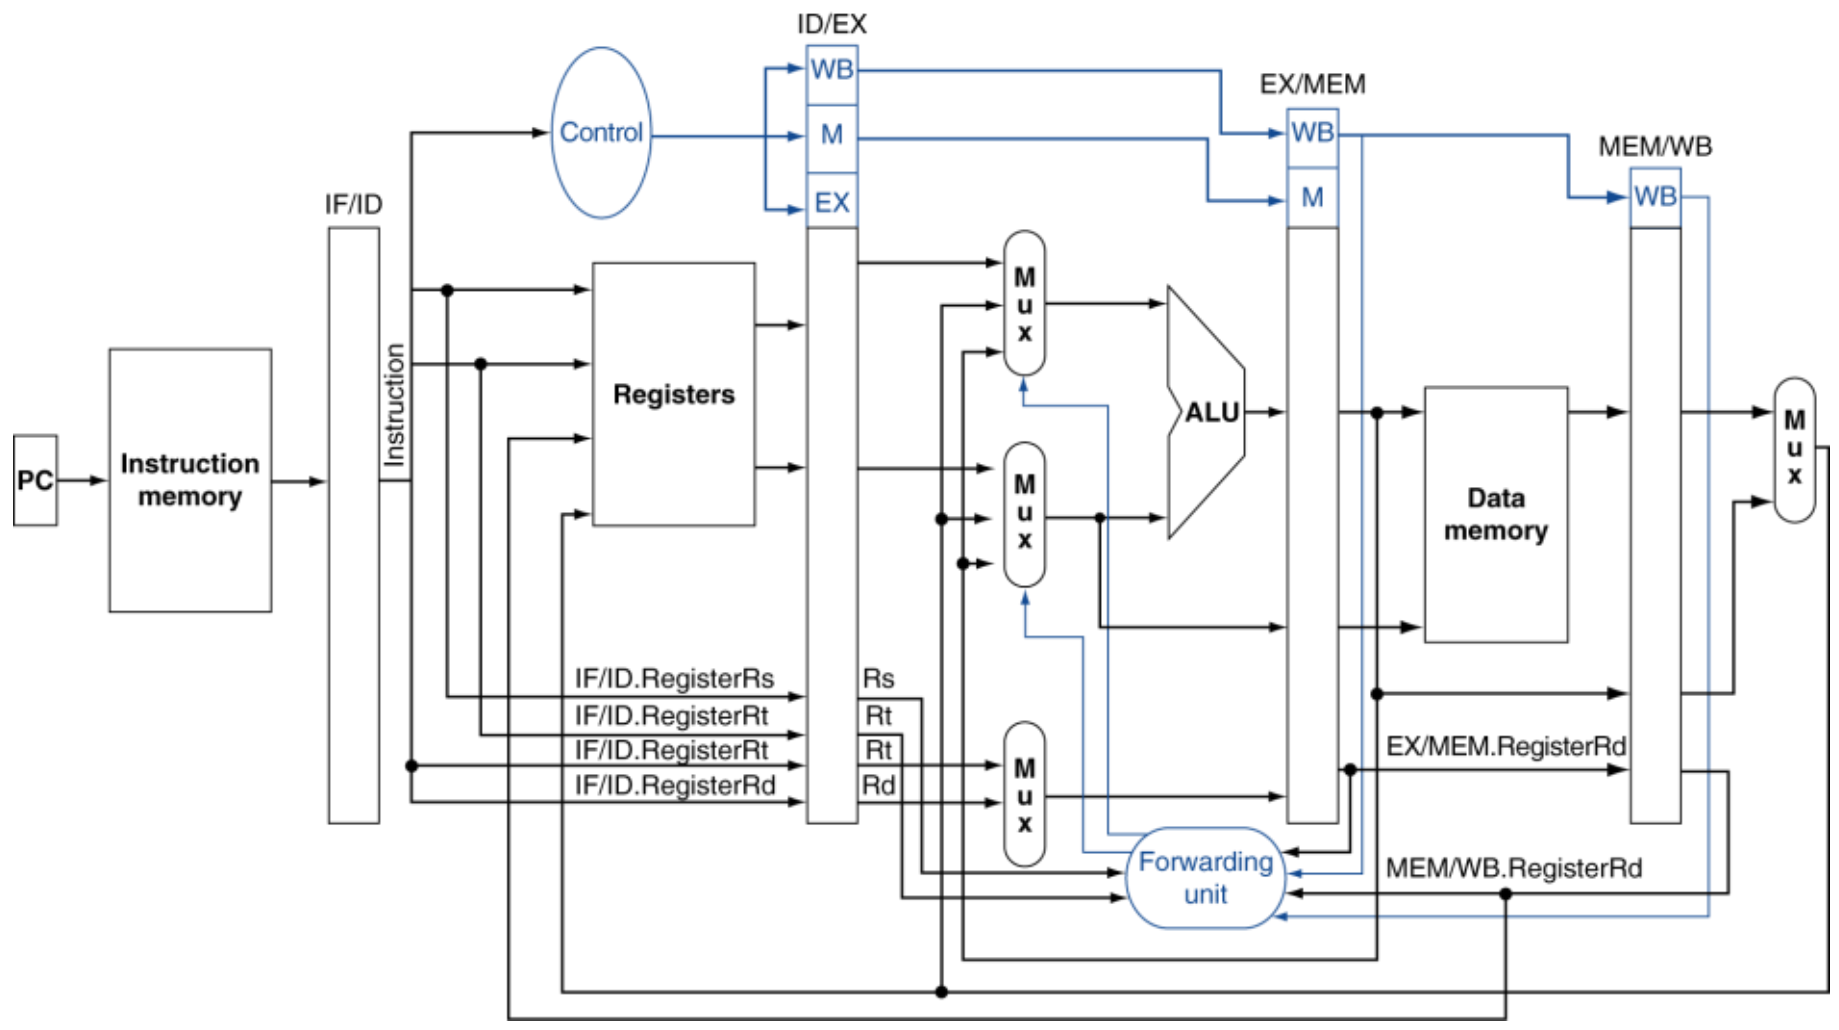

Load-Use Data Hazard

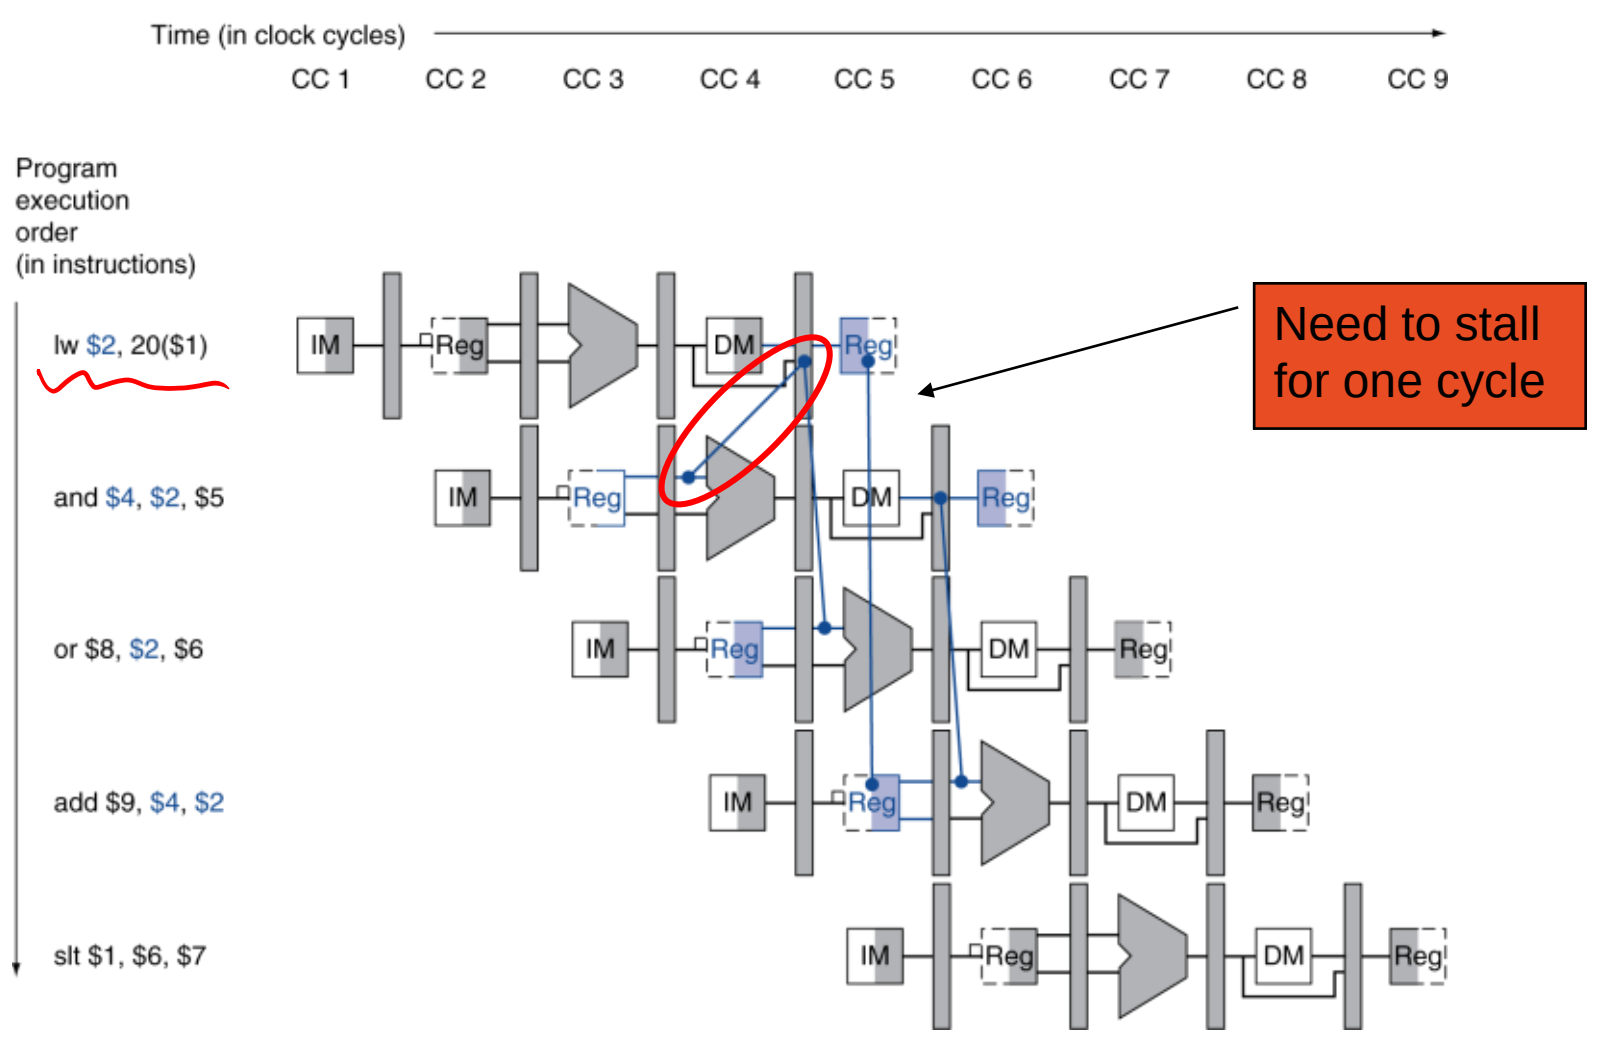

Load-Use Hazard Detection

- Check when using instruction is decoded in ID stage
- ALU operand register numbers in ID stage are given by
  - IF/ID.RegisterRs, IF/ID.RegisterRt
- Load-use hazard when
  - ID/EX.MemRead
    and (
        (ID/EX.RegisterRt = IF/ID.RegisterRs)
        or (ID/EX.RegisterRt = IF/ID.RegisterRt))
- If detected, stall and insert bubble

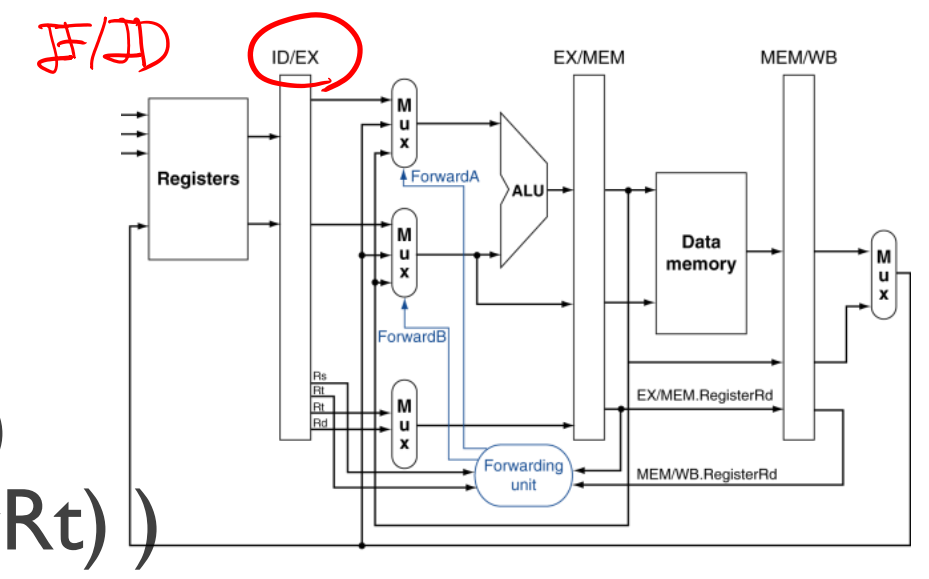

How to Stall the Pipeline

- Force control values in ID/EX register to 0
  - EX, MEM and WB do `nop` (no-operation)
- Prevent update of PC and IF/ID register
  - Using instruction is decoded again
  - Following instruction is fetched again
  - 1-cycle stall allows MEM to read data for `lw`
    - Can subsequently forward to EX stage

CSULB

Stall/Bubble in the Pipeline

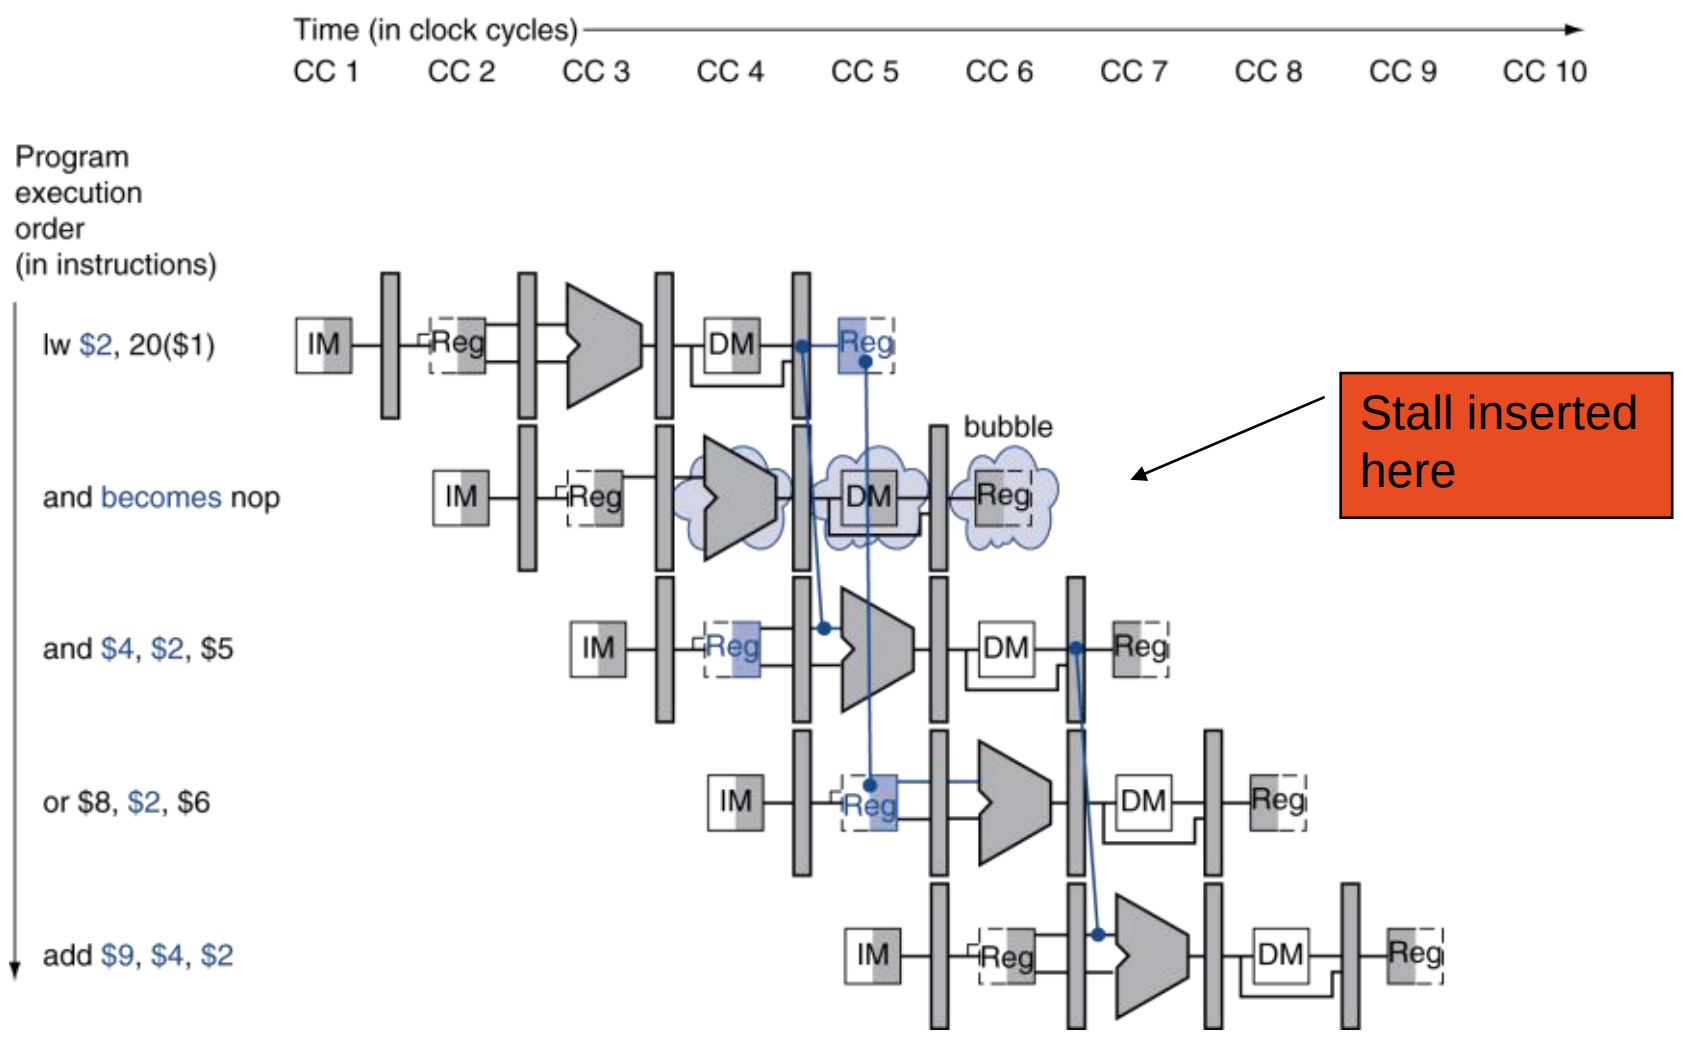

CSULB

Datapath with Hazard Detection

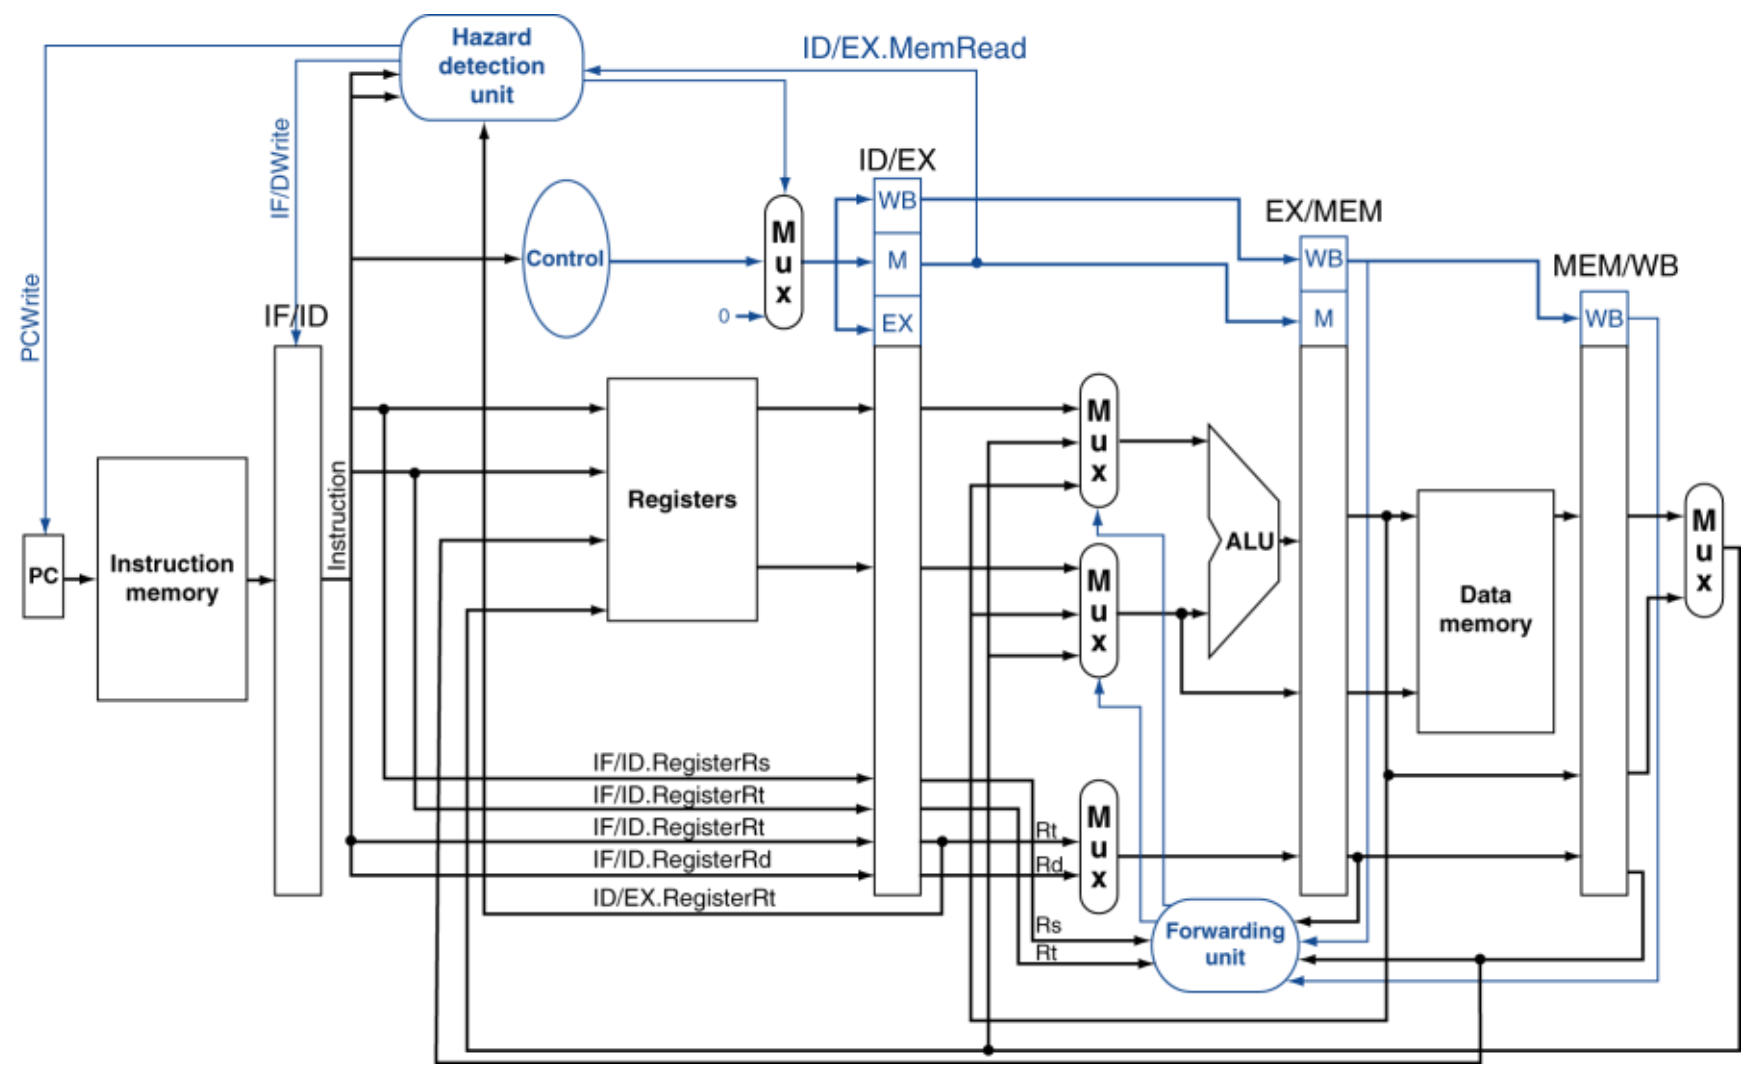

Stalls and Performance

- Stalls reduce performance
  - But are required to get correct results
- Compiler can arrange code to avoid hazards and stalls
  - Requires knowledge of the pipeline structure

Branch Hazards

- If branch outcome determined in MEM

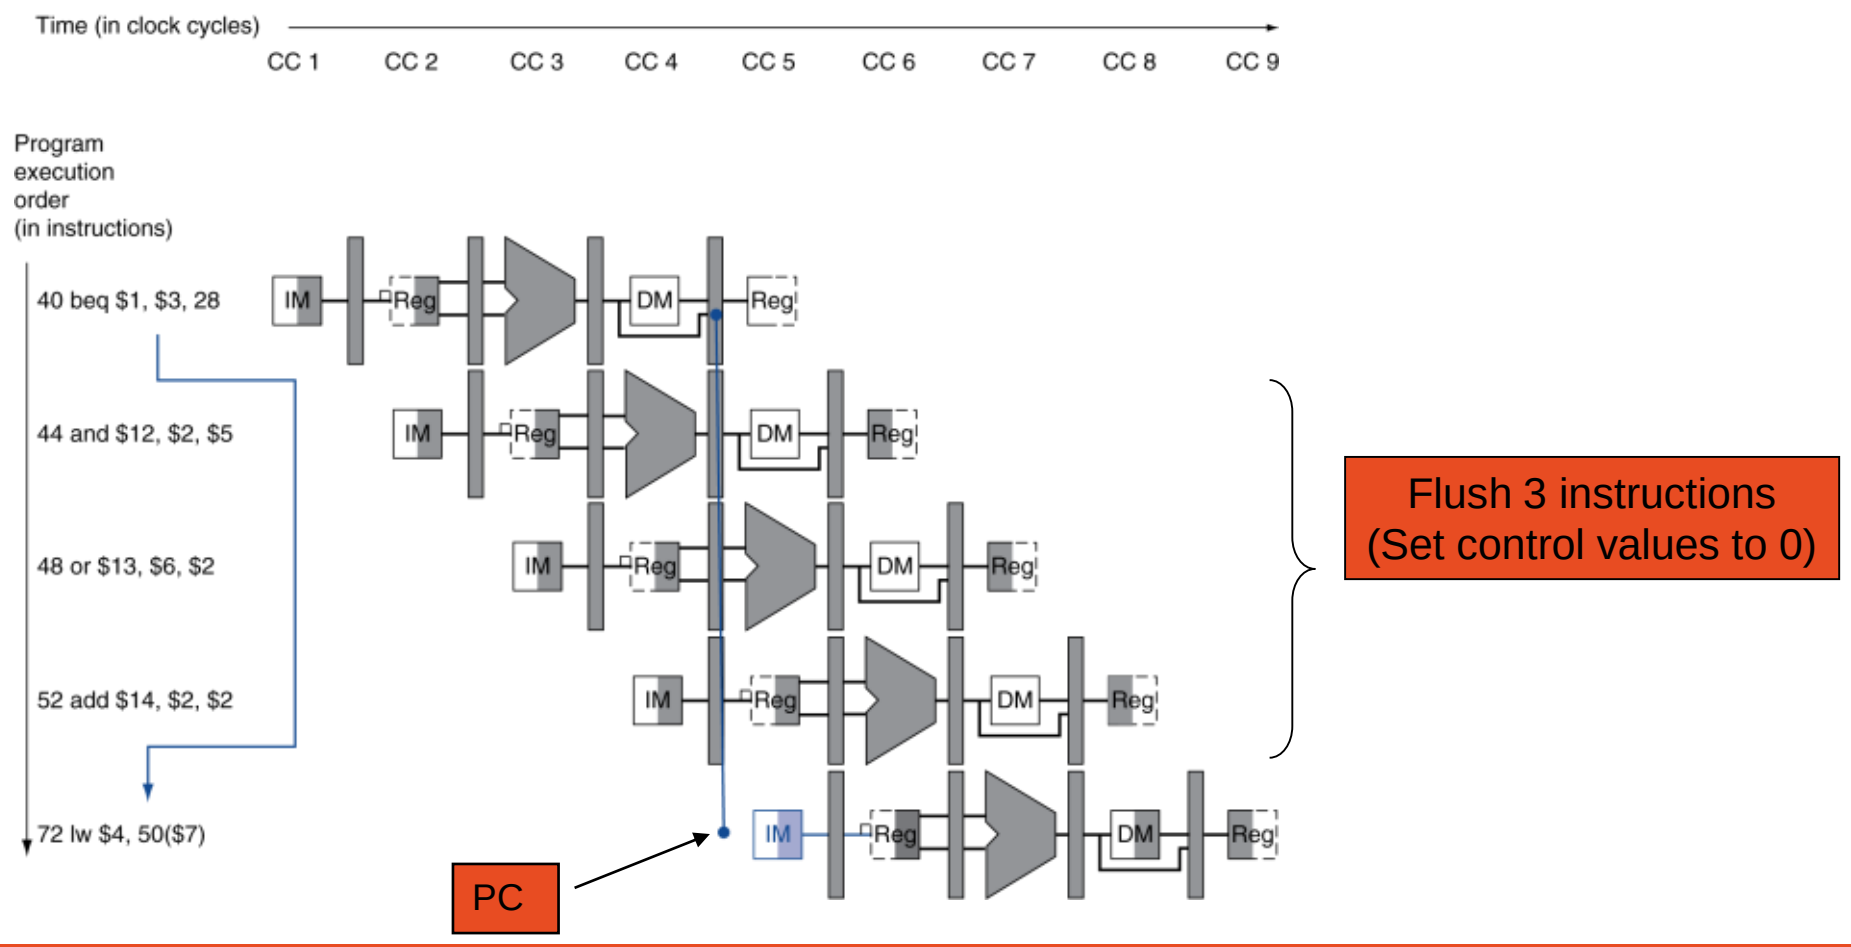

CSULB

Reducing Branch Delay

- Move hardware to determine outcome to ID stage
  - Target address adder
  - Register comparator
- Example: branch taken

```
36:  sub  $10, $4, $8
40:  beq  $1,  $3, 7
44:  and  $12, $2, $5
48:  or   $13, $2, $6
52:  add  $14, $4, $2
56:  slt  $15, $6, $7
     ...
72:  lw   $4, 50($7)
```

CSULB

Example: Branch Taken

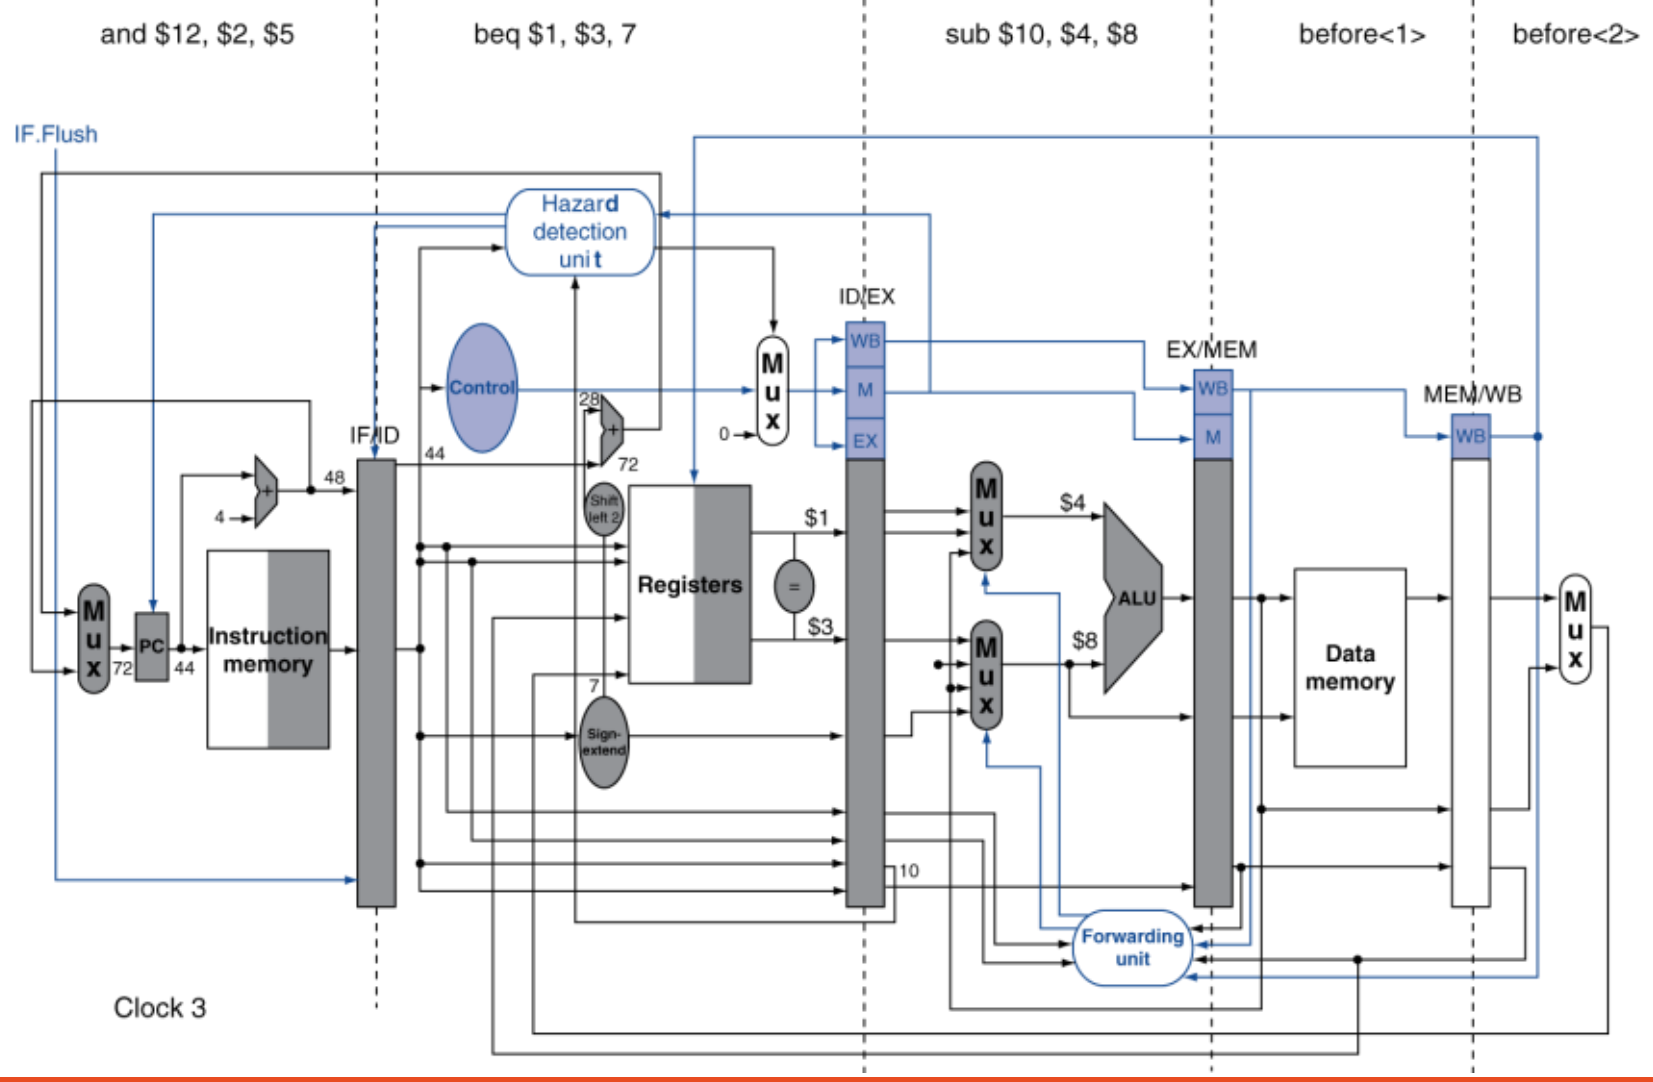

CSULB

Example: Branch Taken

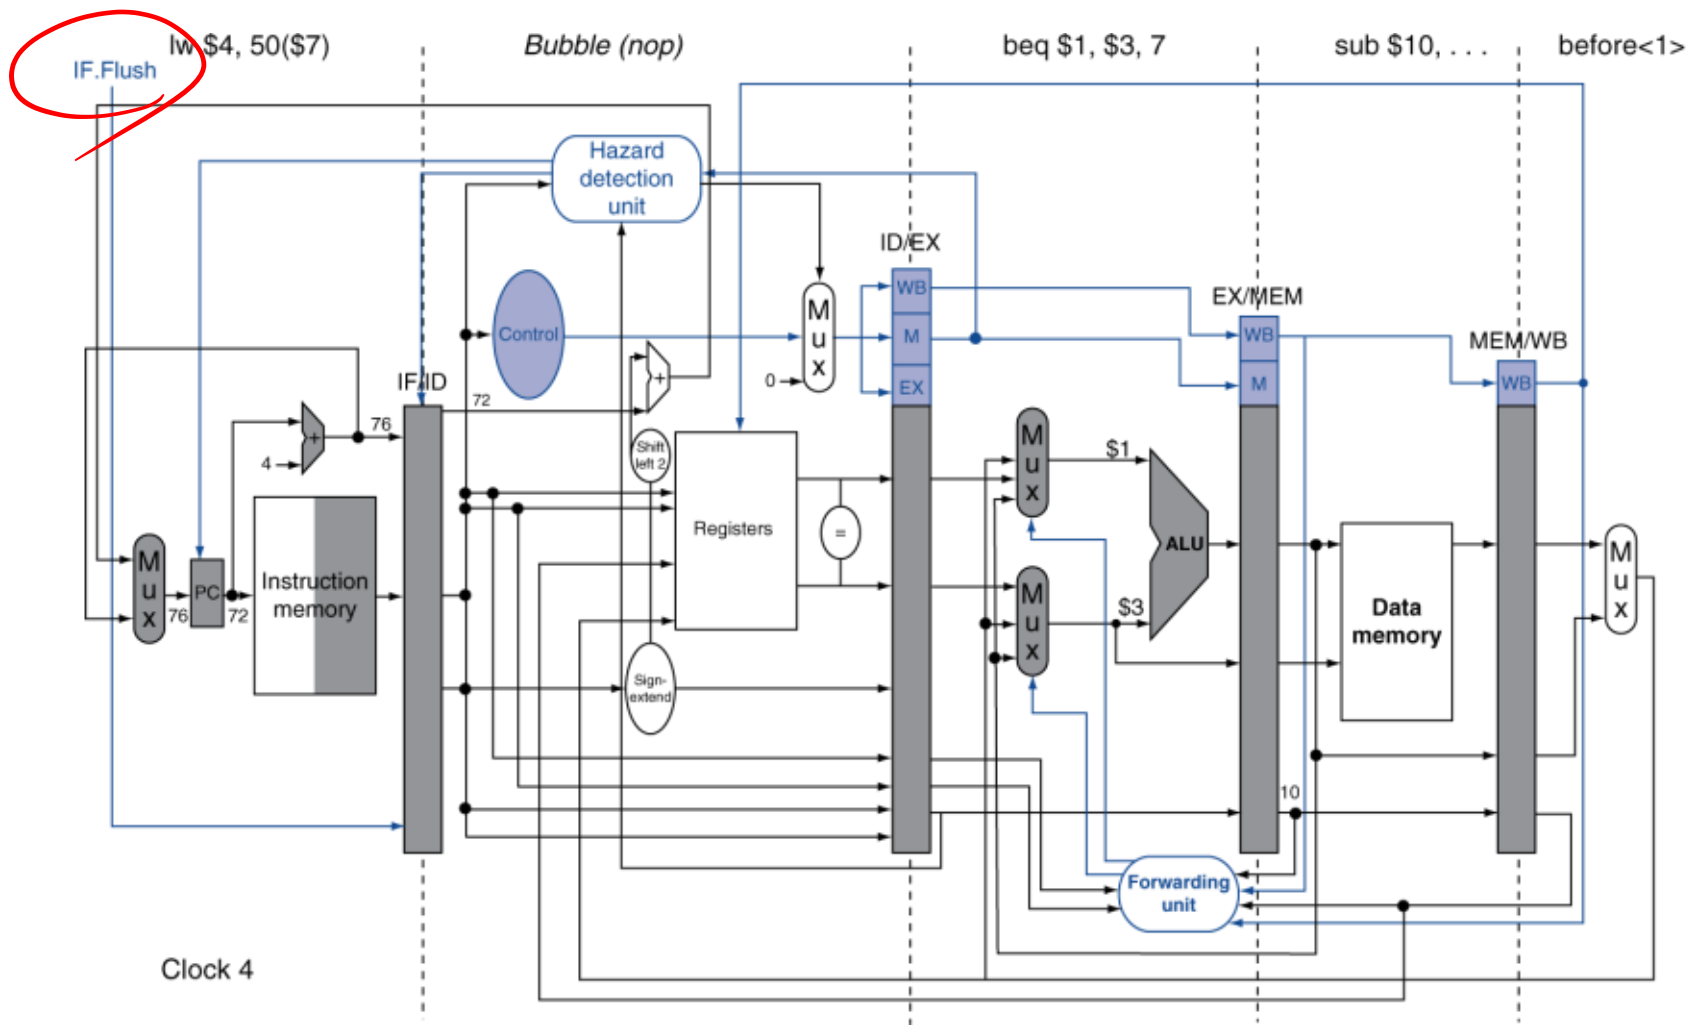

CSULB

Data Hazards for Branches

- If a comparison register is a destination of 2nd or 3rd preceding ALU instruction
  - Can resolve using forwarding

```
add  $1, $2, $3
add  $4, $5, $6
…
beq  $1, $4, target
```

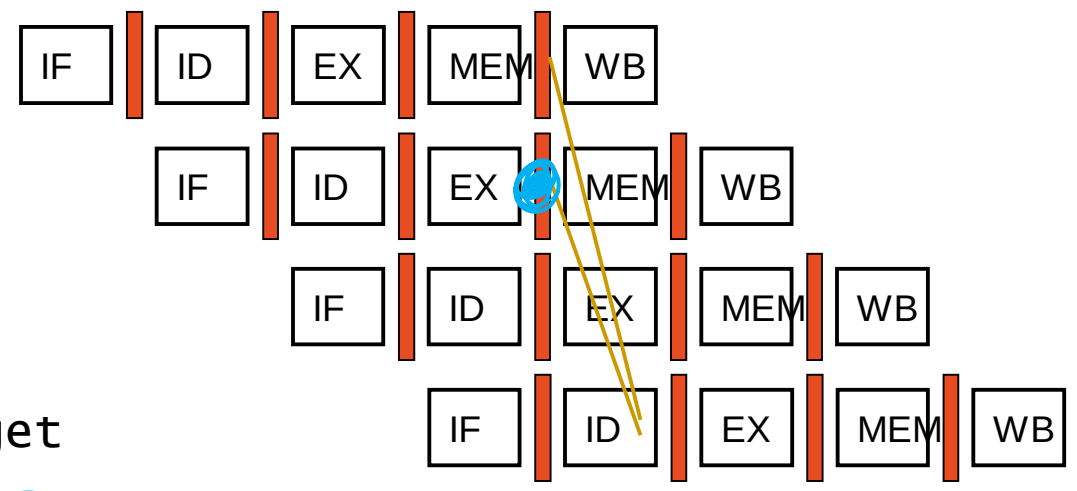

Data Hazards for Branches

- If a comparison register is a destination of preceding ALU instruction or 2nd preceding load instruction
  - Need 1 stall cycle

```
lw   $1, addr
add  $4, $5, $6
beq  stalled
beq  $1, $4, target
```

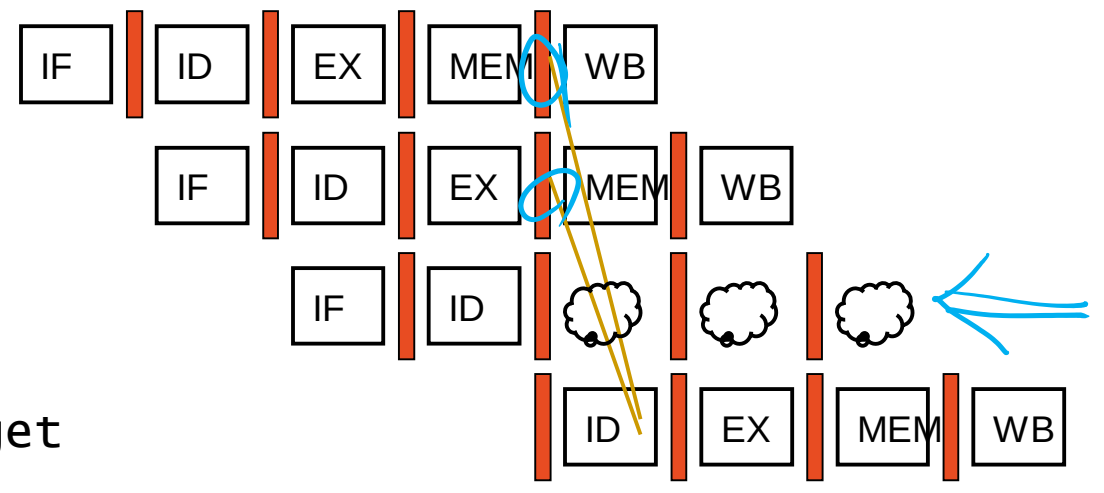

Data Hazards for Branches

- If a comparison register is a destination of immediately preceding load instruction
  - Need 2 stall cycles

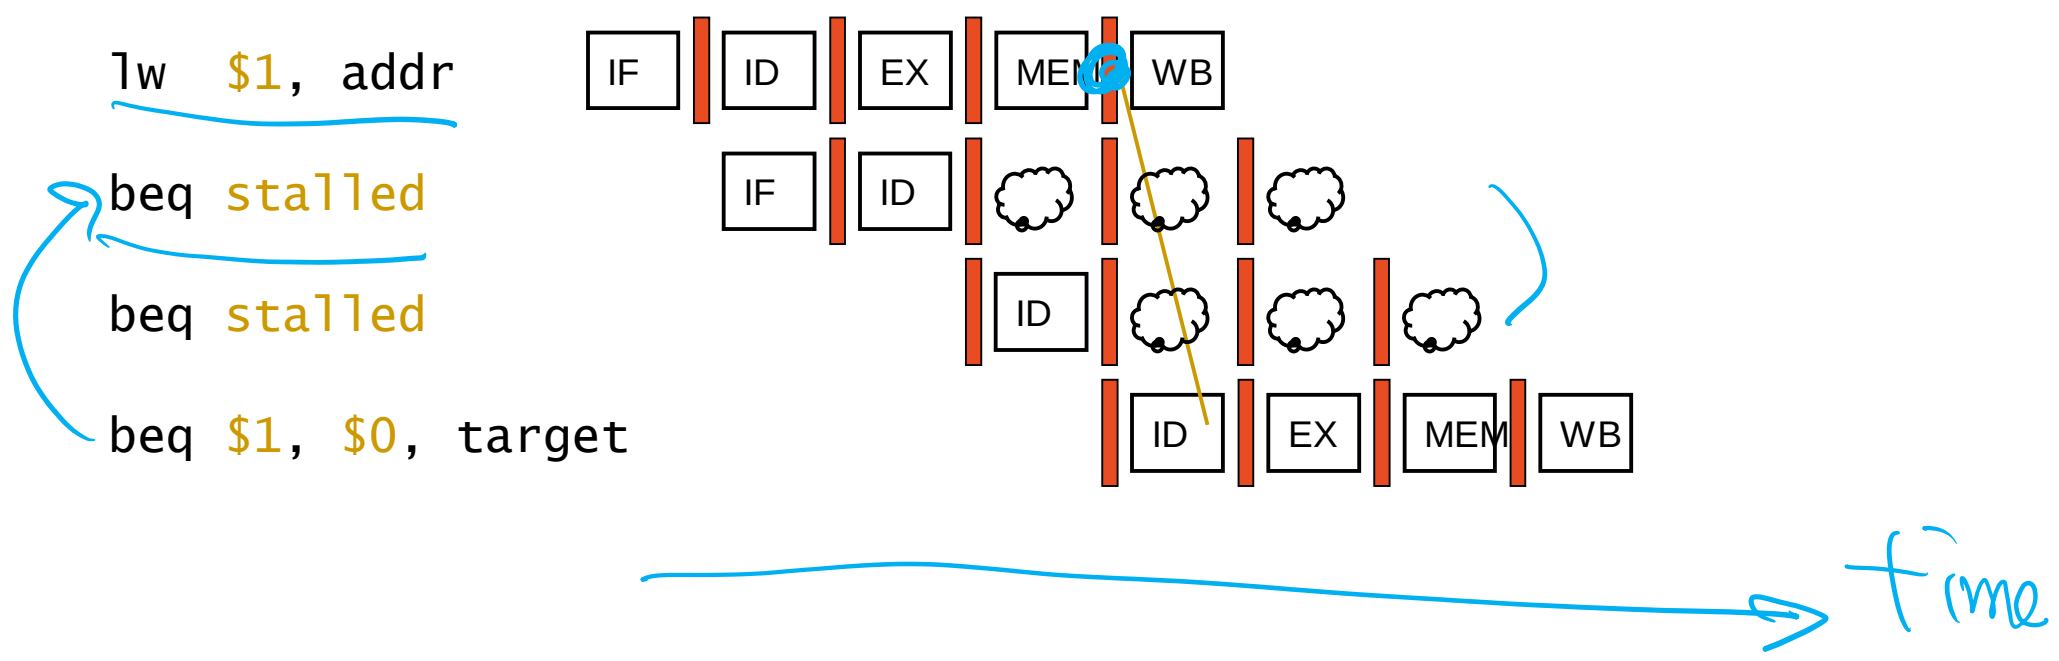
lw $1, addr
beq stalled
beq stalled
beq $1, $0, target
IF
ID
EX
MEM
WB
time