



## USB 3.0 TYPE A CONNECTORS

# MIL-DTL-38999 Series III Type Connectors




233-353 Panel mount receptacles with solder cups



| Part Number Development             |                                             |    |    |     |   |   |   |   |
|-------------------------------------|---------------------------------------------|----|----|-----|---|---|---|---|
| Sample Part Number                  | 233-353                                     | NF | 00 | -15 | 3 | A | N | H |
| Basic Number                        | 233-353                                     |    |    |     |   |   |   |   |
| Finish                              | See Material and Finish table               |    |    |     |   |   |   |   |
| Connector Style <sup>1</sup>        | See Connector Style table                   |    |    |     |   |   |   |   |
| Shell Size                          | 15                                          |    |    |     |   |   |   |   |
| USB Performance                     | 3 = USB 3.0                                 |    |    |     |   |   |   |   |
| USB Interface (Front and Back)      | A = Type A                                  |    |    |     |   |   |   |   |
| Alternate Key Position <sup>1</sup> | A, B, C, D, E, N = Normal per MIL-DTL-38999 |    |    |     |   |   |   |   |
| USB Orientation                     | H = Horizontal    V = Vertical              |    |    |     |   |   |   |   |

### USB Receptacle Orientation Options

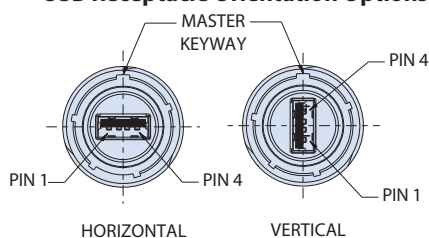


| Material and Finish |                              |
|---------------------|------------------------------|
| NF                  | Aluminum/Cadmium, Olive Drab |
| ME                  | Aluminum/Electroless Nickel  |
| MT                  | Aluminum/Nickel PTFE         |
| ZR                  | Aluminum/Black Zinc-Nickel   |
| AB                  | Marine Bronze                |
| XM                  | Composite/Electroless Nickel |

Additional material / finish options available consult factory

| Connector Style |                                               |
|-----------------|-----------------------------------------------|
| 07              | Rear panel mount, jam nut receptacle          |
| 00              | Wall mount receptacle with slotted holes      |
| D0              | Wall mount receptacle with thru-holes         |
| CM              | Wall mount receptacle with metric clinch nuts |

## 07 - JAM-NUT MOUNT RECEPTACLE

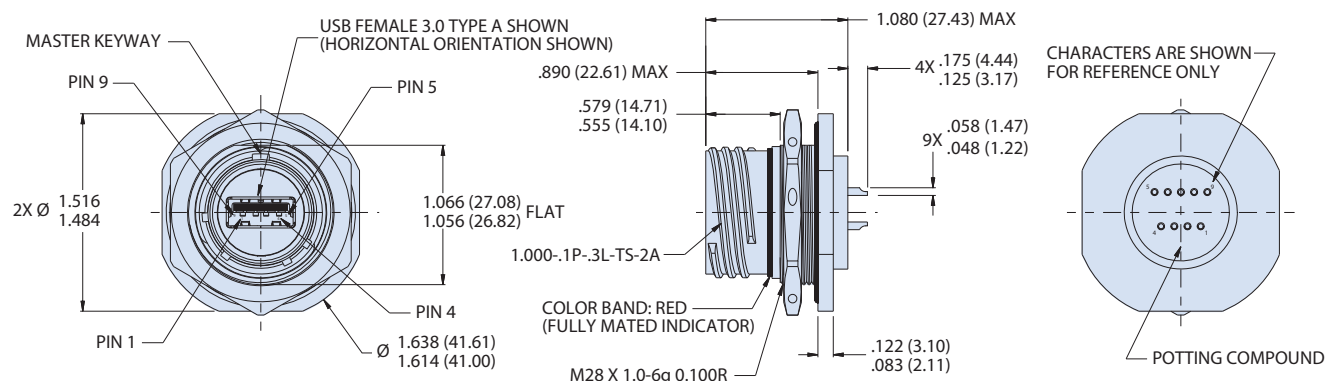

### NOTES

- See Section A for alternate key/keyway positions and panel cutout dimensions
- Meets IP67 in unmated condition, IP68 mated
- USB female port, front
- Rear panel mount only
- Material and Finish
  - Shell, jam nut: al alloy
  - Insulators: high grade rigid dielectric/n.a.
  - Contacts: copper alloy, gold plated
  - Seals: silicone based elastomer

- USB (shell/contacts): copper alloy
- Dielectric: hi-temp thermoplastic PA9T UL94V-0
- Hardware: stainless steel /passivated

*All external dimensions, features, etc. compliant with D38999/20, /24, &/26. Consult factory for additional information.*

| USB 3.0 Wiring |         |              |
|----------------|---------|--------------|
| Pin            | Name    | Description  |
| 1              | (V BUS) | +5 V         |
| 2              | (D-)    | USB 2.0 Data |
| 3              | (D+)    |              |
| 4              | (GND)   | Ground       |
| 5              | (RX-)   | Receiver     |
| 6              | (RX+)   | Receiver     |
| 7              | (GND)   | Ground       |
| 8              | (TX-)   | Transmitter  |
| 9              | (TX+)   | Transmitter  |




## USB 3.0 TYPE A CONNECTORS

# MIL-DTL-38999 Series III Type Connectors




## 233-353 Panel mount receptacles with solder cups

### 00 - WALL MOUNT RECEPTACLE WITH SLOTTED THRU-HOLES

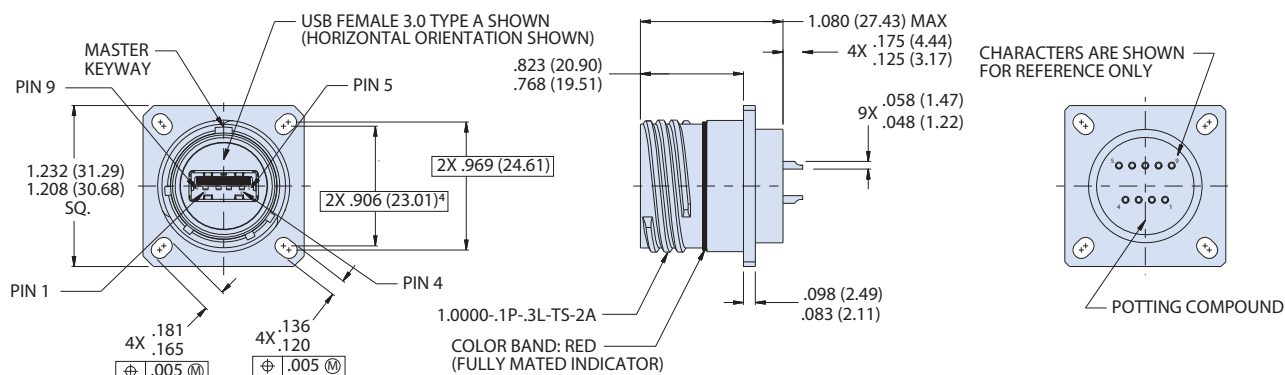

### DO - WALL MOUNT RECEPTACLE WITH ROUND THRU-HOLES

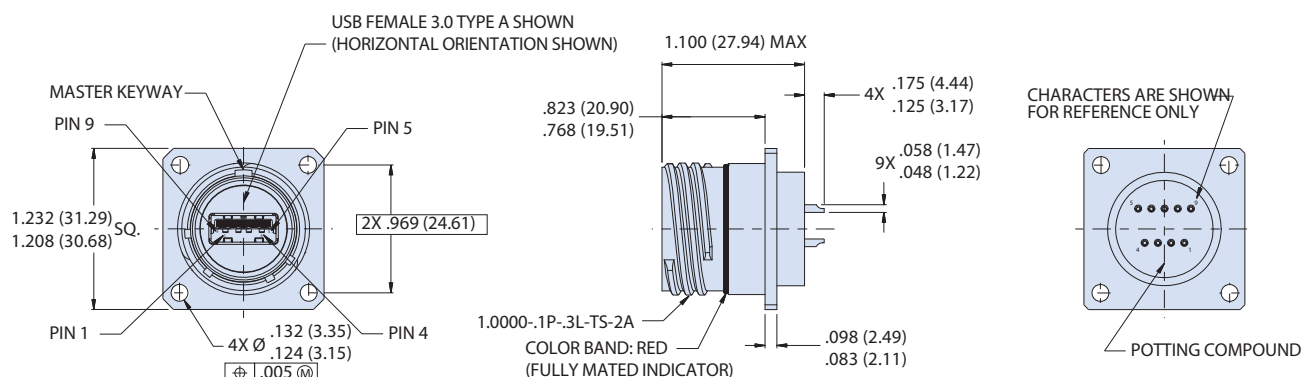

### CM - WALL MOUNT RECEPTACLE WITH METRIC CLINCH NUTS

