


SuperNine® RJ45 CAT 6A


MIL-DTL-38999 Series III Type connectors 233-312 Plug with accessory threads





Part Number Development									
Sample Part Number	233-312				NF	G6	-	17	6A
Series / Basic Part No.	233-312 = Cat 6A interface for D38999 type shell								
Material/Finish	NF = Aluminum/cadmium olive drab MT = Aluminum/nickel PTFE ME = Aluminum/electroless nickel ZR = Aluminum/zinc-nickel				Contact factory for additional options				
Connector Style	G6 = Plug								
Plug Options	(-) = CAT 6A (28 AWG) A = CAT 6A (22-26 AWG)								
Shell Size	17 and 19								
RJ45 Category	6A = Cat 6A								
Alternate Polarization	A, B, C, D, E, N = Normal; Per MIL-DTL-38999								
RJ45 Orientation	1, 2, 3, 4								
Strain Relief Style	A = Accessory threads (accepts standard D38999 backshells) M = Over mold Omit for standard				T = Shrink boot				
Cable OD	W = Large cable OD up to .400 (10.16) Omit for cable OD .187/.312 (4.75/7.92)								

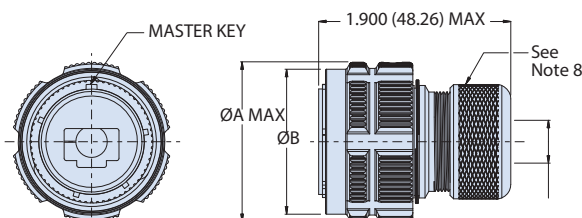


Strain Relief Style: Standard



Strain Relief Style: A - Accessory Threads

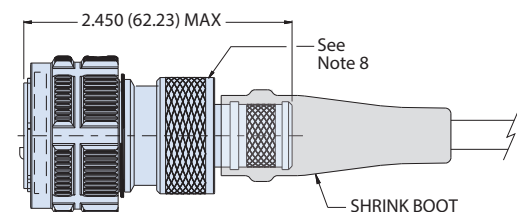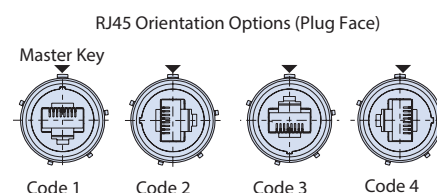

Strain Relief Style: T - Shrink Boot

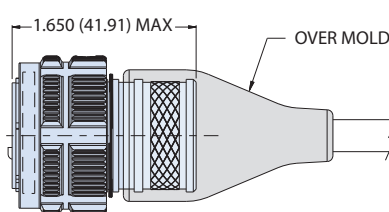

STRAIN RELIEF STYLE: M - OVER MOLD

Dimensions		
Shell Size	ØA Max	ØB
17	1.406 (35.71)	1.276 (32.41) 1.268 (32.21)
19	1.516 (38.51)	1.382 (35.10) 1.374 (34.90)

NOTES

1. Material/finish:

- Barrel, coupling nut: see part number development. Composite coupling nut no plating required.
- Insulators: high grade rigid dielectric/ N.A.
- Seals: silicone based elastomer
- Hardware: stainless steel/passivated

2. RJ45 plug specifications:

- RJ45 plug cable maintains shield continuity
- RoHS compliant

Electrical

- Current rating: 1 amp
- D.W.V.: 1000V DC/min
- I.R.: 500 Mega ohms minimum @ 1000V DC
- Operating temperature range: -20°C to +85°C
- 3. Meets IP68 in mated condition
- 4. Design accommodates cable outside diameter 0.187 (4.750) to 0.400 (10.16)
- 5. Design accommodates CAT 6A RJ45 modular plugs:
(-) = CAT 6A, 28 AWG
A = CAT 6A, 22-26 AWG

6. See assembly instructions AI233-312

- for cable termination and connector assembly. Assembly instructions to be kitted with each shipment
- 7. CAT 6A modular plugs packaged loose for each plug connector.
- 8. Recommended torque value for different cable outside diameter.

Cable OD (in)	.187/.225	.225/.275	.275/.312	.312/.400
Torque (in/lbs)	20.6	18.3	12.6	10