

METRIC


MIL-DTL-38999/49B  
w/AMENDMENT 1  
2 July 2024  
SUPERSEDING  
MIL-DTL-38999/49B  
5 February 2014

## DETAIL SPECIFICATION SHEET

### CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, IN-LINE CABLE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein  
shall consist of this specification sheet and MIL-DTL-38999.

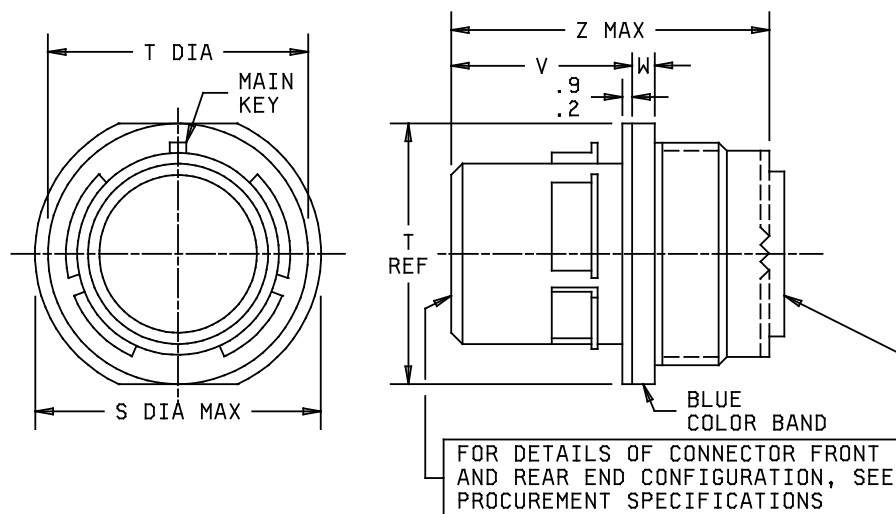

| mm  | Inches |
|-----|--------|
| 0.2 | .008   |
| 0.9 | .035   |

FIGURE 1. Receptacle, classes C, F, R, T, W, X and Z.

MIL-DTL-38999/49B  
w/AMENDMENT 1

| Shell size | Shell size code | S dia max       | T dia                          | V                          | W                         | Z max          |
|------------|-----------------|-----------------|--------------------------------|----------------------------|---------------------------|----------------|
| 11         | B               | 26.78<br>(1.05) | 20.15 / 19.76<br>(.79 / .78)   | 20.8 / 19.2<br>(.82 / .76) | 2.6 / 2.1<br>(.10 / .08 ) | 32.0<br>(1.26) |
| 13         | C               | 31.15<br>(1.23) | 23.35 / 22.96<br>(.92 / .90 )  |                            |                           |                |
| 15         | D               | 34.32<br>(1.35) | 26.52 / 26.13<br>(1.04 / 1.03) |                            |                           |                |
| 17         | E               | 37.50<br>(1.48) | 29.72 / 29.33<br>(1.17 / 1.15) |                            |                           |                |
| 19         | F               | 40.29<br>(1.59) | 32.87 / 32.48<br>(1.29 / 1.28) |                            |                           |                |
| 21         | G               | 43.46<br>(1.71) | 36.05 / 35.66<br>(1.42 / 1.40) |                            |                           |                |
| 23         | H               | 46.64<br>(1.84) | 39.22 /38.83<br>(1.54 / 1.53)  |                            |                           |                |
| 25         | J               | 49.89<br>(1.96) | 42.40 / 42.01<br>(1.67 / 1.65) |                            | 3.4 / 2.9<br>(.13 / .11)  |                |

NOTES:

1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.

FIGURE 1. Receptacle, classes C, F, R, T, W, X and Z – Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999.


This connector mates with MIL-DTL-38999/46 and /47.

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

MIL-DTL-38999/49B  
w/AMENDMENT 1

Part or Identifying Number (PIN) example:

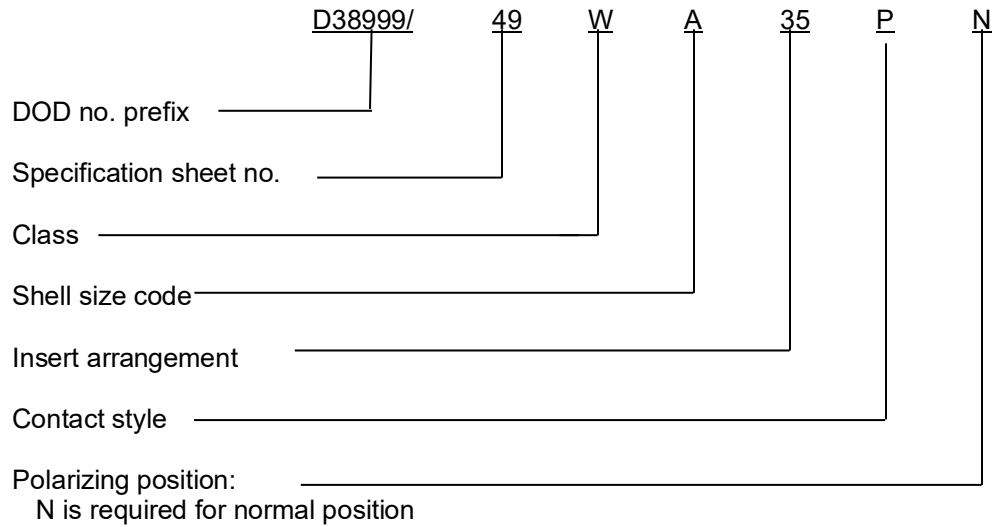

Class F is not for Navy use and is inactive for Air Force new design use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/46  
MIL-DTL-38999/47  
MIL-STD-1560

CONCLUDING MATERIAL

Custodians:

Army – CR  
Navy - AS  
Air Force – 85  
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2024-148)

Review activities:

Army - AR, MI  
Navy - EC, MC, OS  
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.