

INCH-POUND

MS27652B  
W/AMENDMENT 2  
27 June 2025  
SUPERSEDING  
MS27652B  
W/AMENDMENT 1  
8 February 2008

# DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, WALL MOUNTING  
FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I

Inactive for new design after 13 August 1974. For new design,  
use MS27466.

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein  
shall consist of this specification sheet and MIL-DTL-38999.

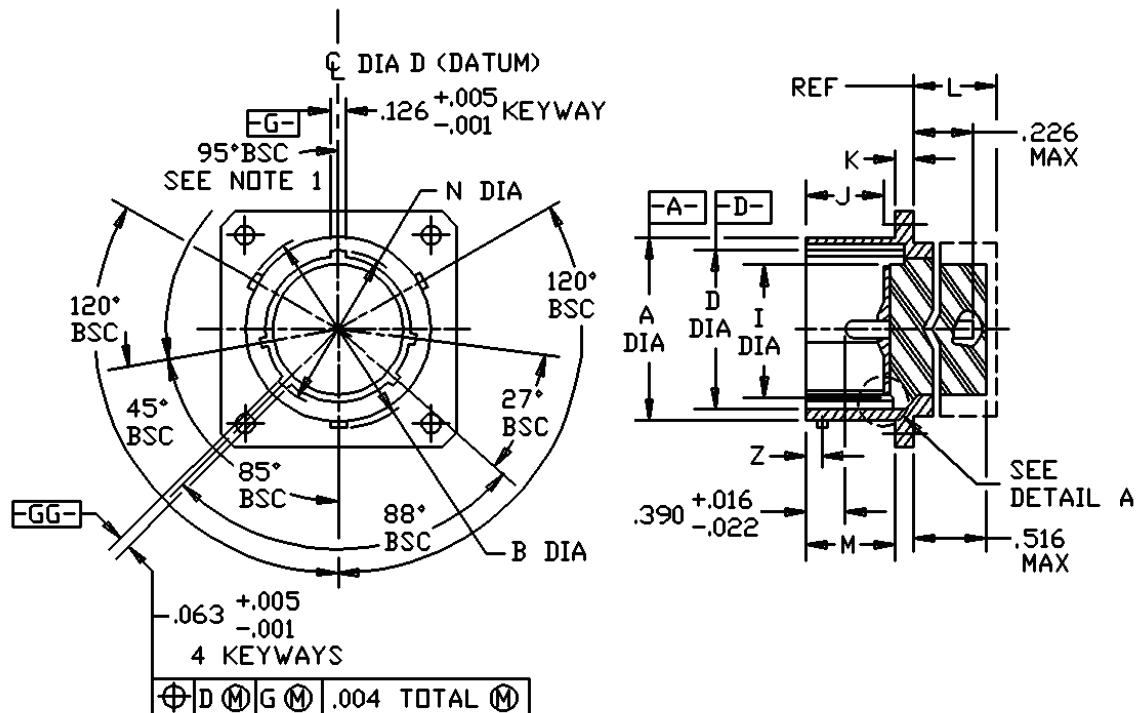


FIGURE 1. Receptacle, classes E and T.

MS27652B  
w/AMENDMENT 2

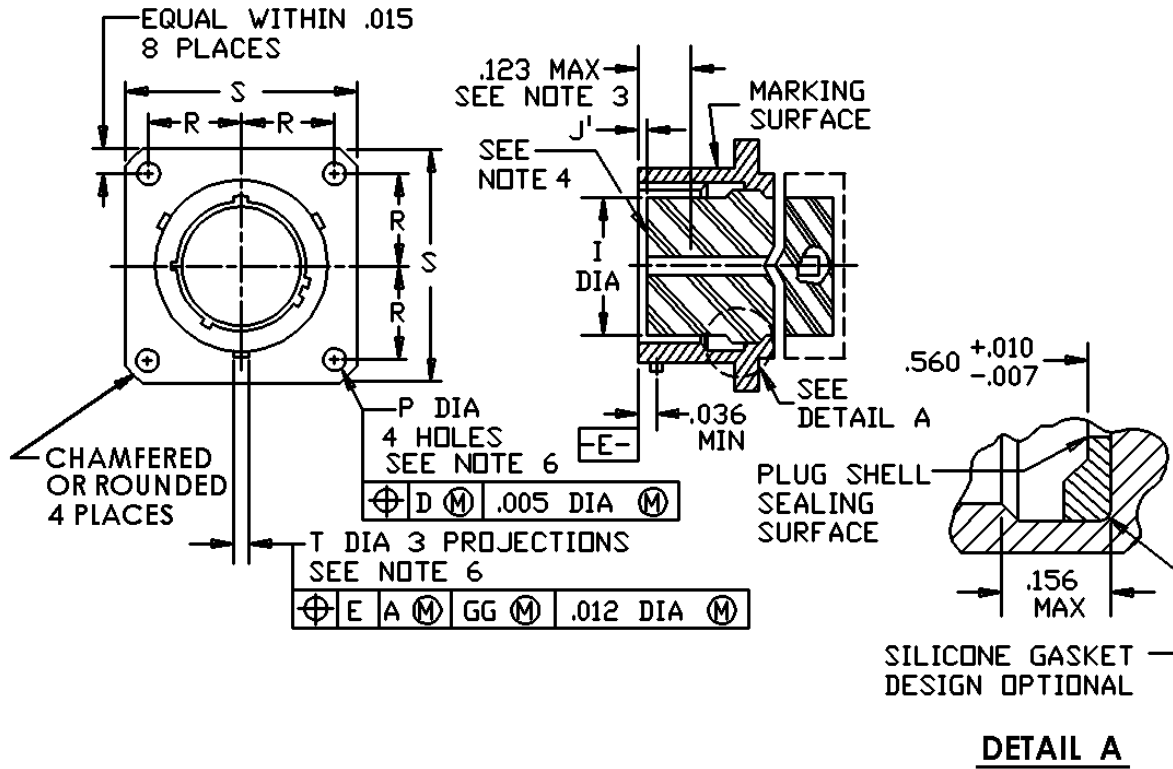


FIGURE 1. Receptacle, classes E and T – Continued.


MS27652B  
w/AMENDMENT 2

| Shell size | A dia<br>+.001<br>-.005 | B dia<br>+.000<br>-.016 | D dia<br>+.005<br>-.001 | I dia<br>max | J<br>+.003<br>-.010<br>pin insert | J <sup>I</sup><br>+.003<br>-.010<br>socket insert | K<br>+.015<br>-.000 | M<br>+.000<br>-.005 |
|------------|-------------------------|-------------------------|-------------------------|--------------|-----------------------------------|---------------------------------------------------|---------------------|---------------------|
| 9          | .572                    | .662                    | .442                    | .290         | .576                              | .020                                              | .085                | .632                |
| 11         | .700                    | .810                    | .570                    | .418         |                                   |                                                   |                     |                     |
| 13         | .850                    | .960                    | .687                    | .532         |                                   |                                                   |                     |                     |
| 15         | .975                    | 1.085                   | .812                    | .657         |                                   |                                                   |                     |                     |
| 17         | 1.100                   | 1.210                   | .937                    | .782         |                                   |                                                   |                     |                     |
| 19         | 1.207                   | 1.317                   | 1.042                   | .871         |                                   |                                                   |                     |                     |
| 21         | 1.332                   | 1.442                   | 1.167                   | .996         |                                   |                                                   | .115                | .602                |
| 23         | 1.457                   | 1.567                   | 1.292                   | 1.121        |                                   |                                                   |                     |                     |
| 25         | 1.582                   | 1.692                   | 1.417                   | 1.246        |                                   |                                                   |                     |                     |

| Shell size | N dia<br>+.005<br>-.006 | P dia<br>+.010<br>-.005 | R BSC | S<br>± .020 | T dia<br>+.010<br>-.005 | Z BSC | For insert arrangement<br>see<br>MIL-STD-1560 |
|------------|-------------------------|-------------------------|-------|-------------|-------------------------|-------|-----------------------------------------------|
| 9          | .492                    | .128                    | .3595 | .938        | .078                    | .100  |                                               |
| 11         | .620                    |                         | .406  | 1.031       |                         |       |                                               |
| 13         | .769                    |                         | .453  | 1.125       |                         |       |                                               |
| 15         | .894                    |                         | .4845 | 1.219       |                         |       |                                               |
| 17         | 1.019                   |                         | .531  | 1.312       |                         |       |                                               |
| 19         | 1.124                   |                         | .578  | 1.438       |                         |       |                                               |
| 21         | 1.249                   | .147                    | .625  | 1.562       |                         |       |                                               |
| 23         | 1.374                   |                         | .6875 | 1.688       | .125                    | .109  |                                               |
| 25         | 1.499                   |                         | .750  | 1.812       |                         |       |                                               |

FIGURE 1. Receptacle, classes E and T – Continued.

MS27652B  
w/AMENDMENT 2

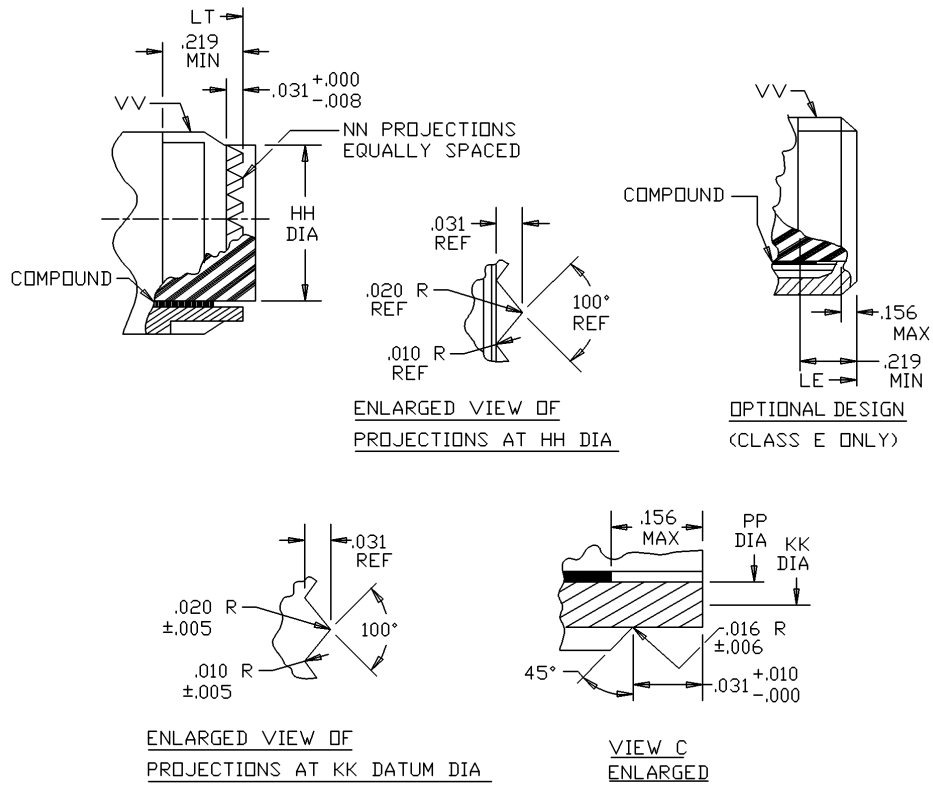

| Inches | mm   | Inches | mm   | Inches | mm    | Inches | mm     |
|--------|------|--------|------|--------|-------|--------|--------|
| .001   | .025 | .010   | .254 | .031   | .787  | .219   | 5.562  |
| .004   | .102 | .012   | .305 | .036   | .914  | .266   | 6.756  |
| .005   | .127 | .015   | .381 | .063   | 1.600 | .390   | 9.906  |
| .006   | .152 | .016   | .406 | .123   | 3.124 | .516   | 13.106 |
| .007   | .178 | .020   | .508 | .126   | 3.200 | .560   | 14.224 |
| .008   | .203 | .022   | .559 | .156   | 3.962 |        |        |

FIGURE 1. Receptacle, classes E and T - Continued.

MS27652B  
w/AMENDMENT 2

| Shell size | HH dia<br>+.001<br>-.005 | KK DATUM dia | NN | PP dia<br>± .003 | LE max length | LT max length | VV Thread class 2A UNEF (plated) |
|------------|--------------------------|--------------|----|------------------|---------------|---------------|----------------------------------|
| 9          | .387                     | .366         | 12 | .344             | .531          | .531          | 7/16-28                          |
| 11         | .515                     | .487         | 16 | .472             |               |               | 9/16-24                          |
| 13         | .628                     | .609         | 20 | .586             |               |               | 11/16-24                         |
| 15         | .754                     | .731         | 24 | .711             |               |               | 13/16-20                         |
| 17         | .879                     | .853         | 28 | .836             |               |               | 15/16-20                         |
| 19         | .985                     | .974         | 32 | .942             |               |               | 1 1/16-18                        |
| 21         | 1.110                    | 1.097        | 36 | 1.067            |               |               | 1 3/16-18                        |
| 23         | 1.235                    | 1.218        | 40 | 1.192            |               |               | 1 5/16-18                        |
| 25         | 1.360                    | 1.340        | 44 | 1.317            |               |               | 1 7/16-18                        |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Normal keyway position. For other keyway positions, see MIL-DTL-38999.
4. Insert front surface shall be flat within .005 Total Indicator Reading (TIR).
5. Diameters A and D shall be concentric within .015 TIR.
6. Diameters D and I shall be concentric within .015 TIR at Maximum Material Condition (MMC).
7. Diameter A with respect to diameter B, and diameter D with respect to diameter N shall be concentric at MMC.
8. The gage features for GG shall be .010 smaller than the MMC size at basic location.
9. The point at which the gage pin, having the same basic diameter as the mating contact and a square face, touches socket contact spring.

FIGURE 1. Receptacle, classes E and T - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.  
Interface dimensions shall conform to MIL-DTL-38999.  
Mating connectors: MS27467, MS27653 and MS27661.  
Insert arrangements: See MIL-STD-1560.

MS27652B  
w/AMENDMENT 2

Part or Identifying Number (PIN) example:

|                                   | <u>MS27652</u> | <u>I</u> | <u>15</u> | <u>E</u> | <u>18</u> | <u>P</u> | <u>A</u> |
|-----------------------------------|----------------|----------|-----------|----------|-----------|----------|----------|
| MS number                         |                |          |           |          |           |          |          |
| Class                             |                |          |           |          |           |          |          |
| Shell size                        |                |          |           |          |           |          |          |
| Finish                            |                |          |           |          |           |          |          |
| Insert arrangement                |                |          |           |          |           |          |          |
| Contact style                     |                |          |           |          |           |          |          |
| Polarizing positions              |                |          |           |          |           |          |          |
| no letter is required for normal. |                |          |           |          |           |          |          |

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560  
MS27466  
MS27467  
MS27653  
MS27661

MS27652B  
w/AMENDMENT 2

CONCLUDING MATERIAL

Custodians:

Army - CR  
Navy - AS  
Air Force - 85  
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2025-054)

Review activities:

Army - AR, MI  
Navy - EC, MC, OS  
Air Force - 19

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.