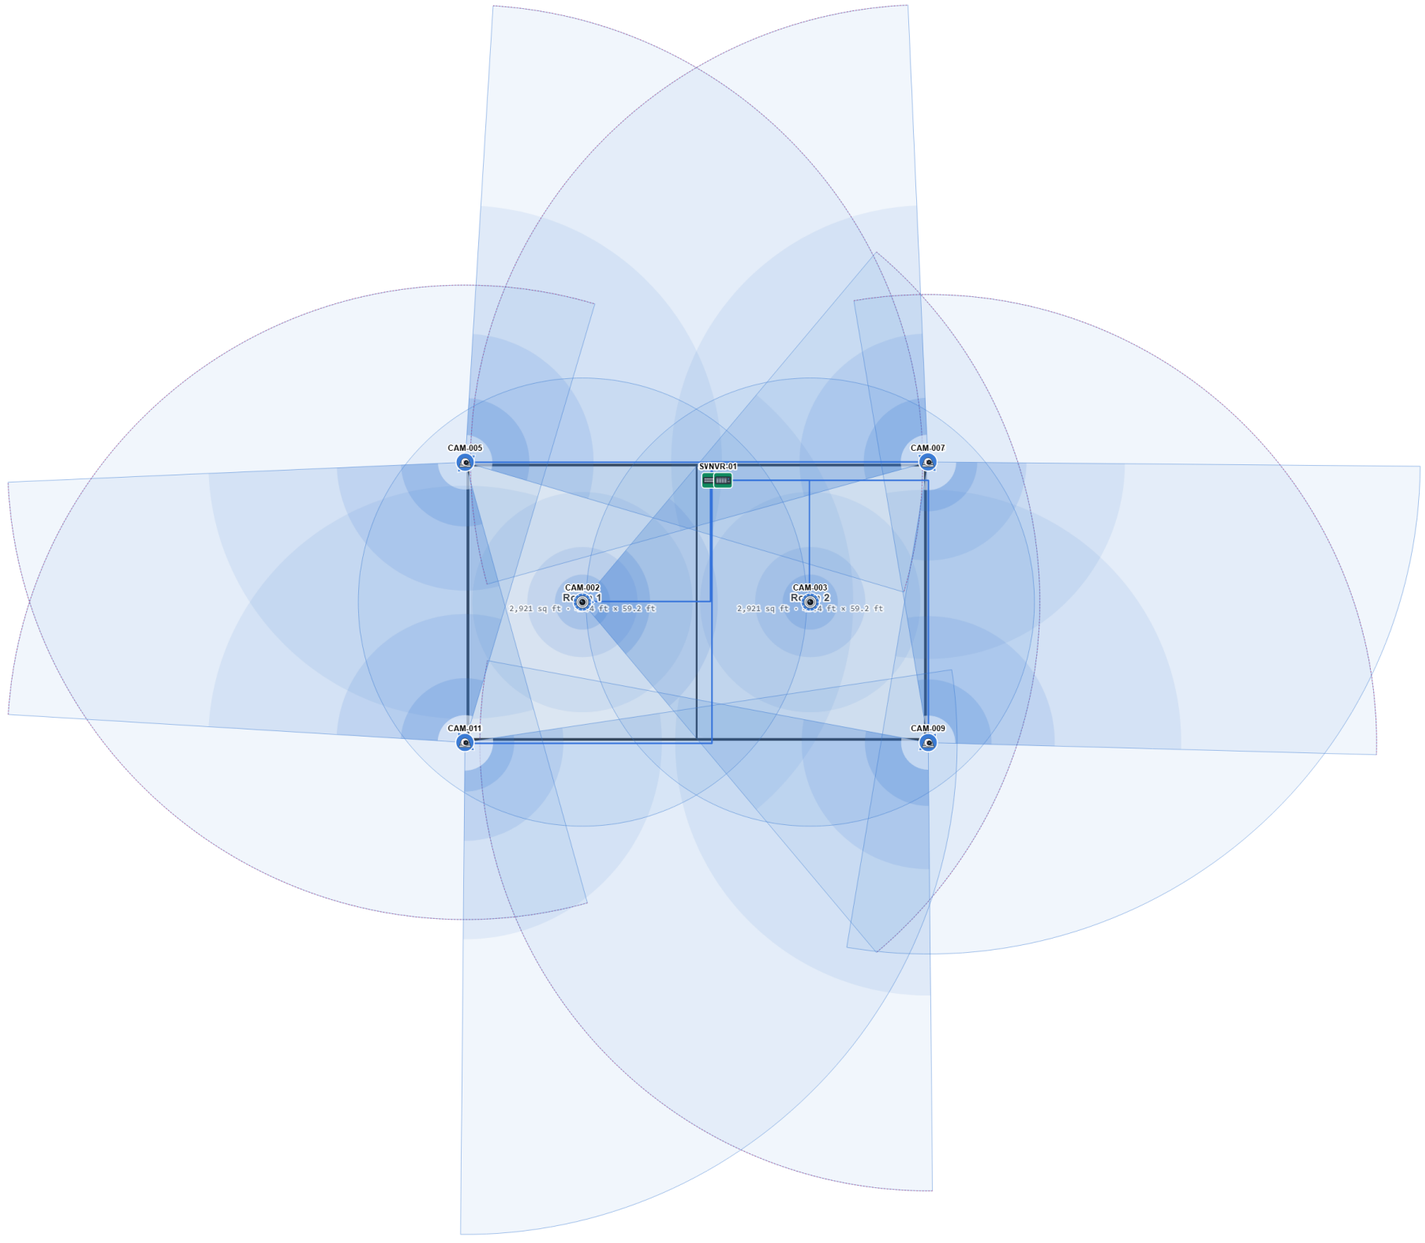


LEGEND

Bullet camera	2
Turret camera	6
Fisheye camera	2
Dome camera	1
NVR	1
PoE switch	1
Camera coverage (DORI bands)	
CAT6	

COMPANY **Your company** DESIGNER —	PROJECT **QA chrome 20261015T1632 Main workflow** CUSTOMER QA Customer (disposable) SITE / ADDRESS 1201 Houston St, Fort Worth, TX	DRAWING **Building A · Floor 1** SCALE 1" = 33.1' (fit to page) DATE 10/15/2026	DRAWING NO. **SEC-001-01** REVISION A SHEET 1 of 1

Assumptions & verification — QA chrome 20261015T1632 Main workflow

- Scale — Building A · Floor 1: Set by two-point calibration (100 ft between two points, 10/15/2026) · 1 dimension check, worst +0.0%.
- Cameras: 11, mounted 9.5–12 ft high as shown; ceiling height assumed 10 ft.
- Coverage target: 90% of each required room at its level (IEC 62676-4 pixel density: detect 25, observe 62.5, recognize 125, identify 250 px/m).
- Recording: 30 days, H265, 15 fps, continuous — about 10.4 TB.
- Products: 3 models checked against manufacturer datasheets, 4 generic placeholders to confirm.
- Coverage is a 2-D estimate from the plan. Shelving, signage, trees, lighting and glare that are not drawn are not modelled — verify on site.