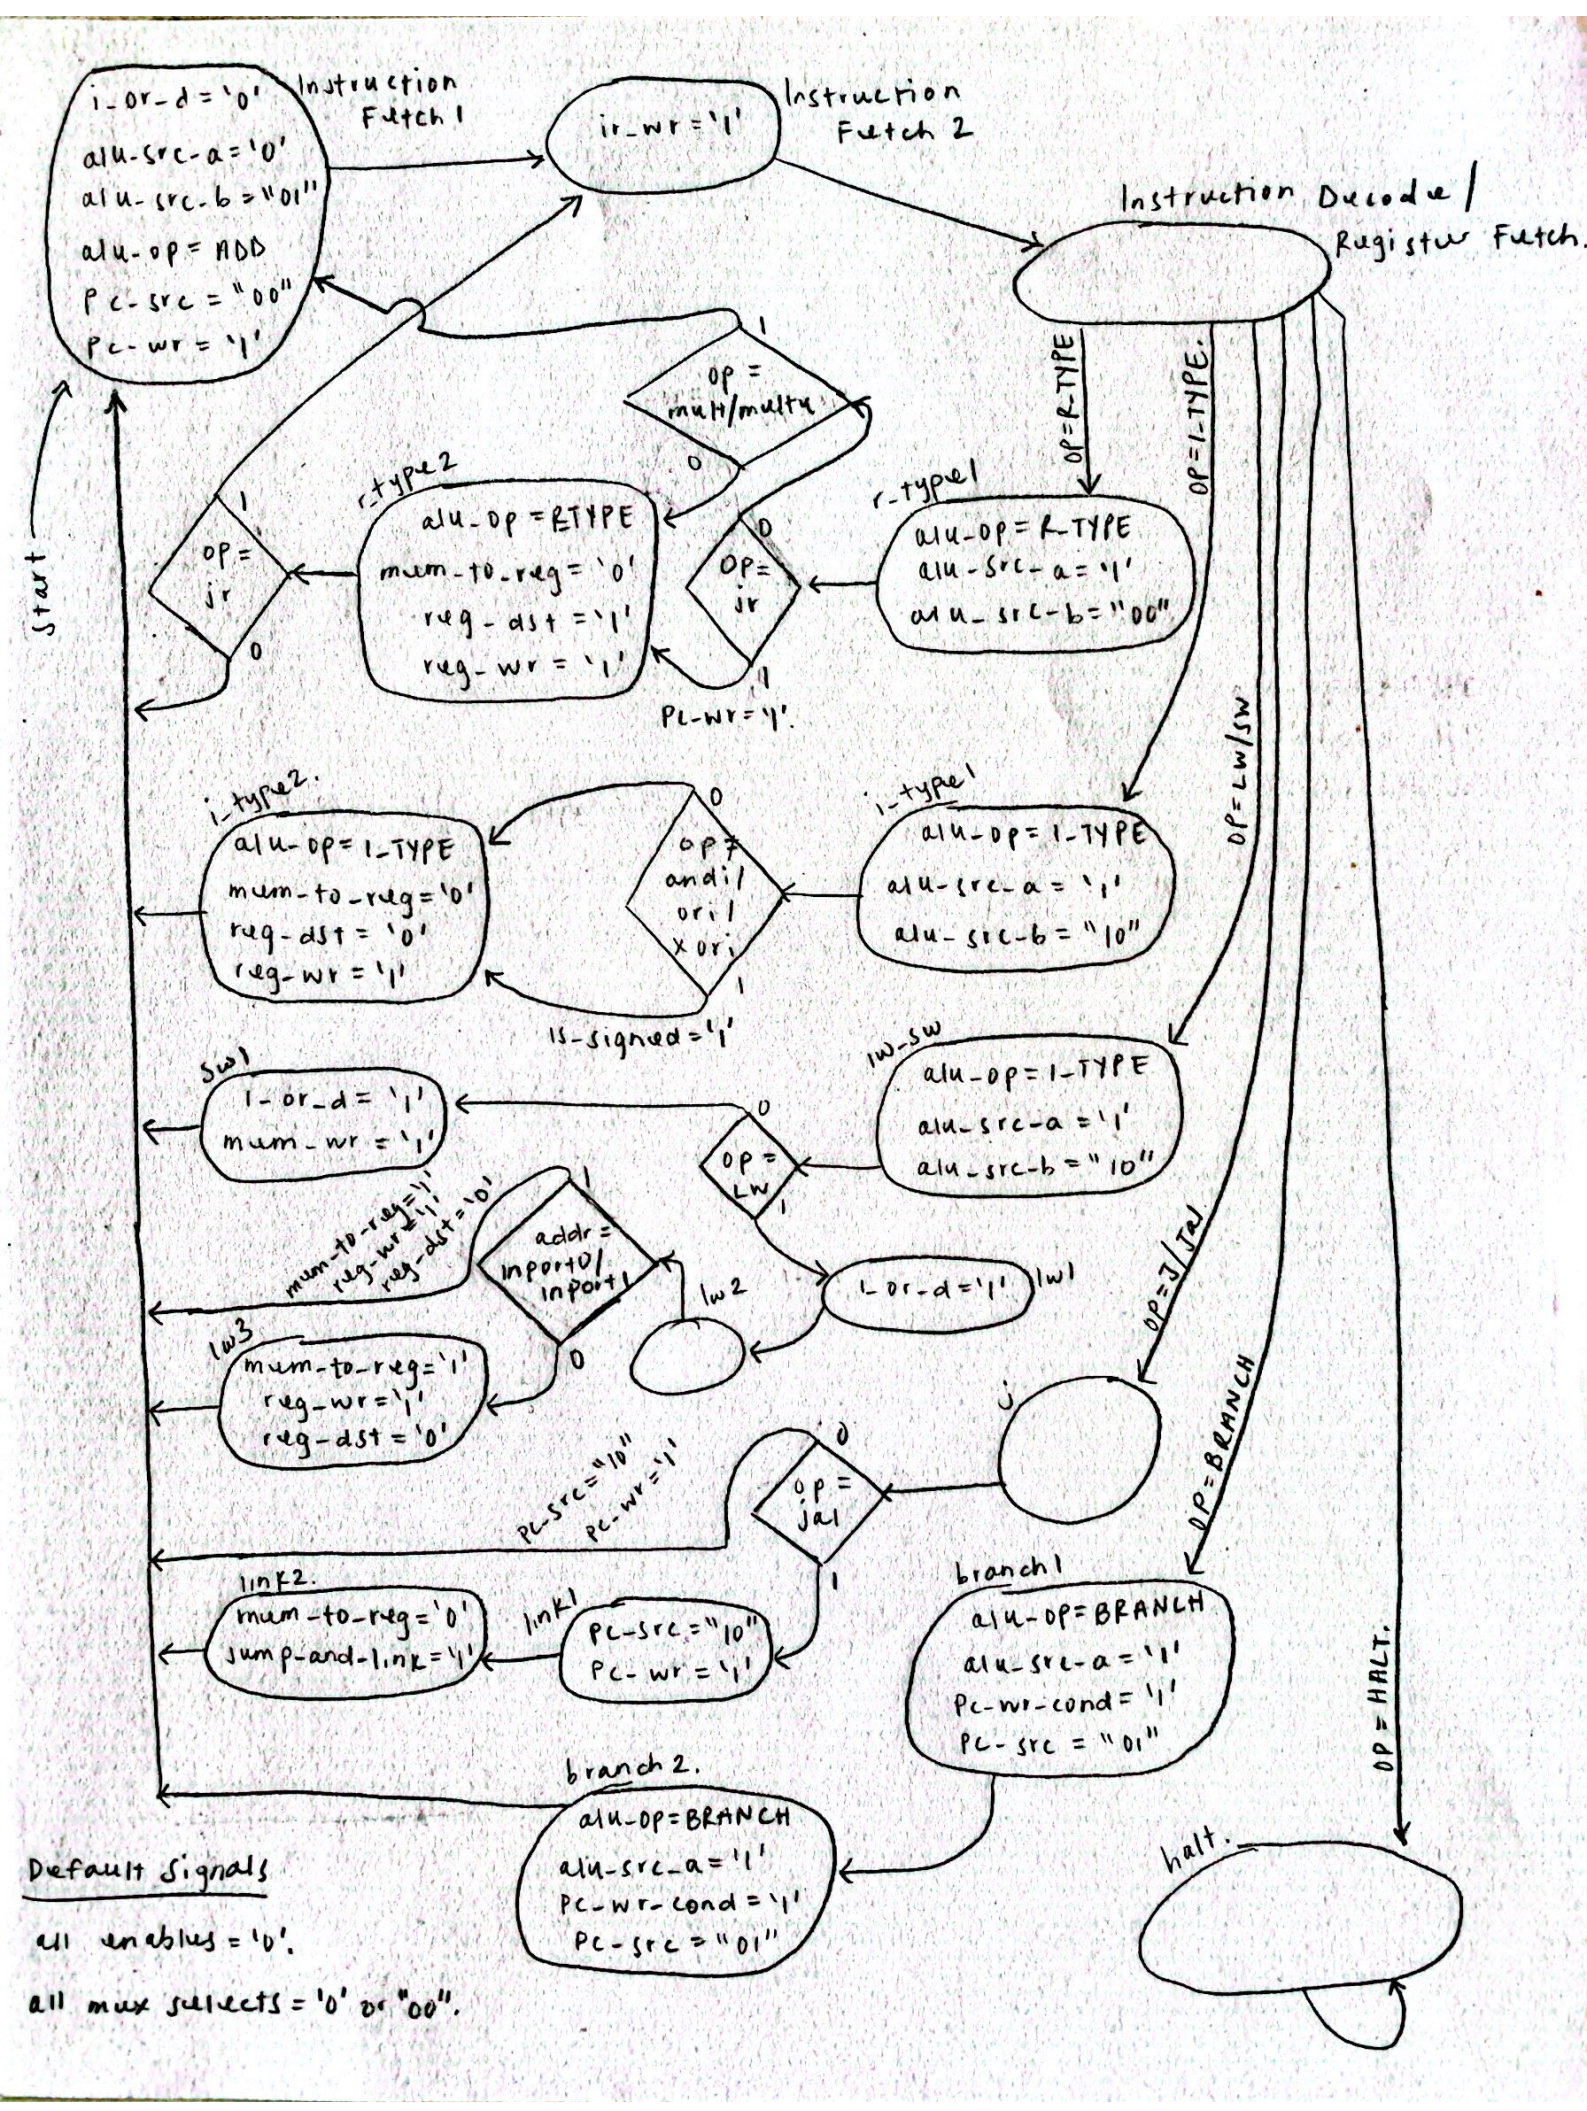

Default Signals

all enables = '0'.

all mux selects = '0' or "00".

Scanned with CamScanner