

F-01 · General arrangement

Walk-in AI sticker booth: machine module (screens, camera, printer) + curtained guest bay



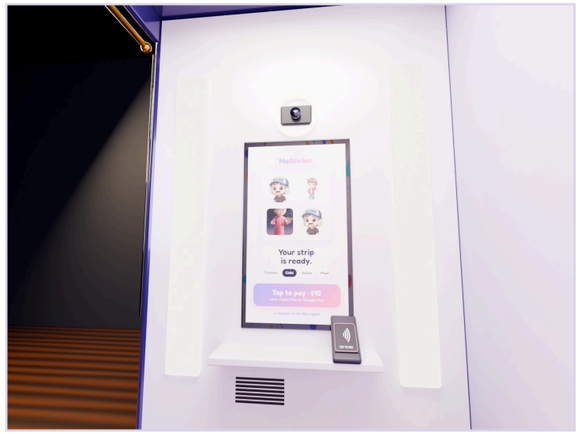

Inside: camera wall

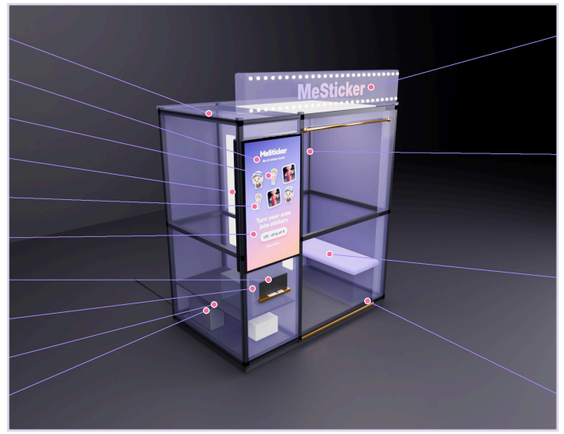

Frame + equipment (x-ray)

OVERALL	MM
Length (machine 600 + bay 1200)	1800
Depth	1100
Body height (incl. 80 plinth)	2000
Height with sign	2310
Curtain opening (w × h)	1000 × 1820
Machine module (rolls in whole)	600 × 1100 × 2000
Guest bay (flat-pack)	1200 × 1100 × 2000
Est. weight, all-in	≈ 180–230 kg


CONSTRUCTION

- Frame: 1.5" (38.1 mm) square steel tube, 16 ga, MIG welded, powder-coated black. See F-05.
- Skins: 3 mm aluminum composite panel (ACM), riveted or VHB-bonded to the frame, gloss plum outside, gloss white on the camera wall. See F-06.
- The machine module is one welded frame on 4 locking casters. The bay is 5 bolt-together sub-frames (end, back, front, floor, roof), joined to the machine posts with M8 bolts. See F-09.
- All electronics live in the machine module, behind a locked service door on its end wall. One power cord goes to the wall. See F-04 and F-08.
- The marquee sign is a separate box that bolts to the roof frame and plugs in.


SHEET INDEX

- F-01 General arrangement · F-02 Front + end elevations · F-03 Plan + back elevation · F-04 Inside elevations (camera wall, machine section)
- F-05 Steel frame + tube cut list · F-06 Panel drawings · F-07 Panel schedule + sheet nesting · F-08 Electrical + data · F-09 Details · F-10 Assembly

F-02 · Front + end elevations

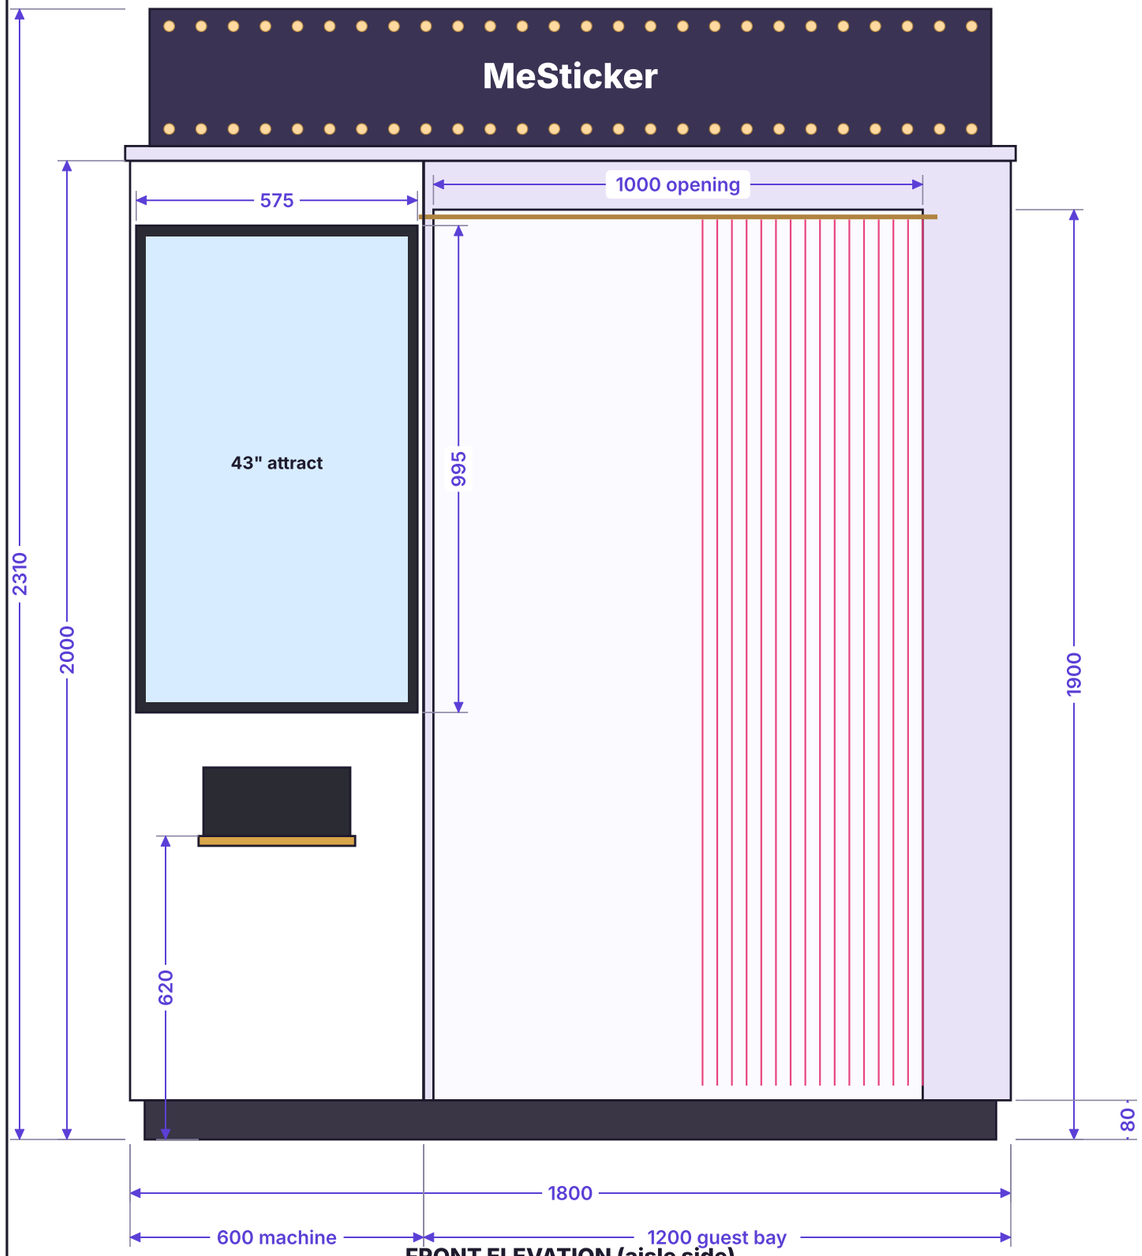

FRONT ELEVATION (aisle side)

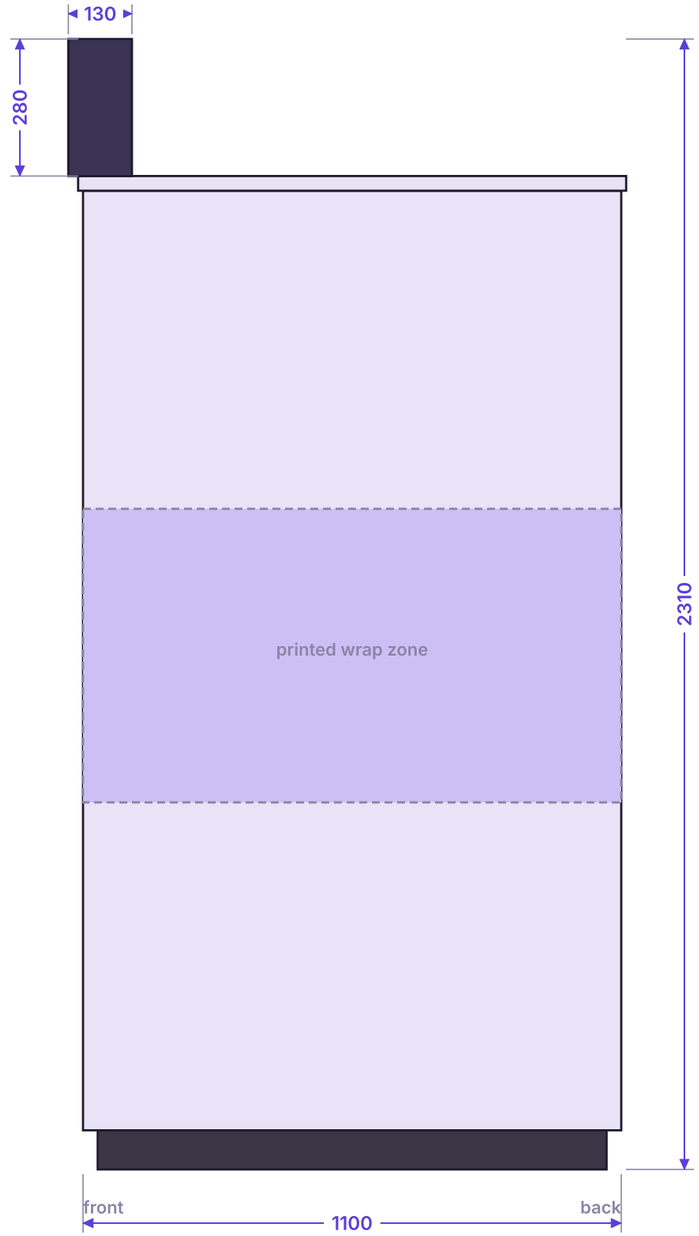

END ELEVATION (bay end)

NOTES


- The sign overhangs the front face by 30 mm.
- The curtain rod is at 1885 mm. The curtain clears the floor by 20 mm.
- The attract display mounts on VESA to the two display stiles (F-05). Its bezel overlaps the panel cutout by 15 mm on each side.
- The pickup tray is a 120 mm deep recess with a brushed brass lip at 600 mm.
- The plinth skirt is inset 30 mm all round and hides the casters and levelers.

MeSticker Photo Booth


Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted

SHEET	TITLE	REV	DATE
F-02	Front + end elevations	A	2026-10-24

F-03 · Plan + back elevation

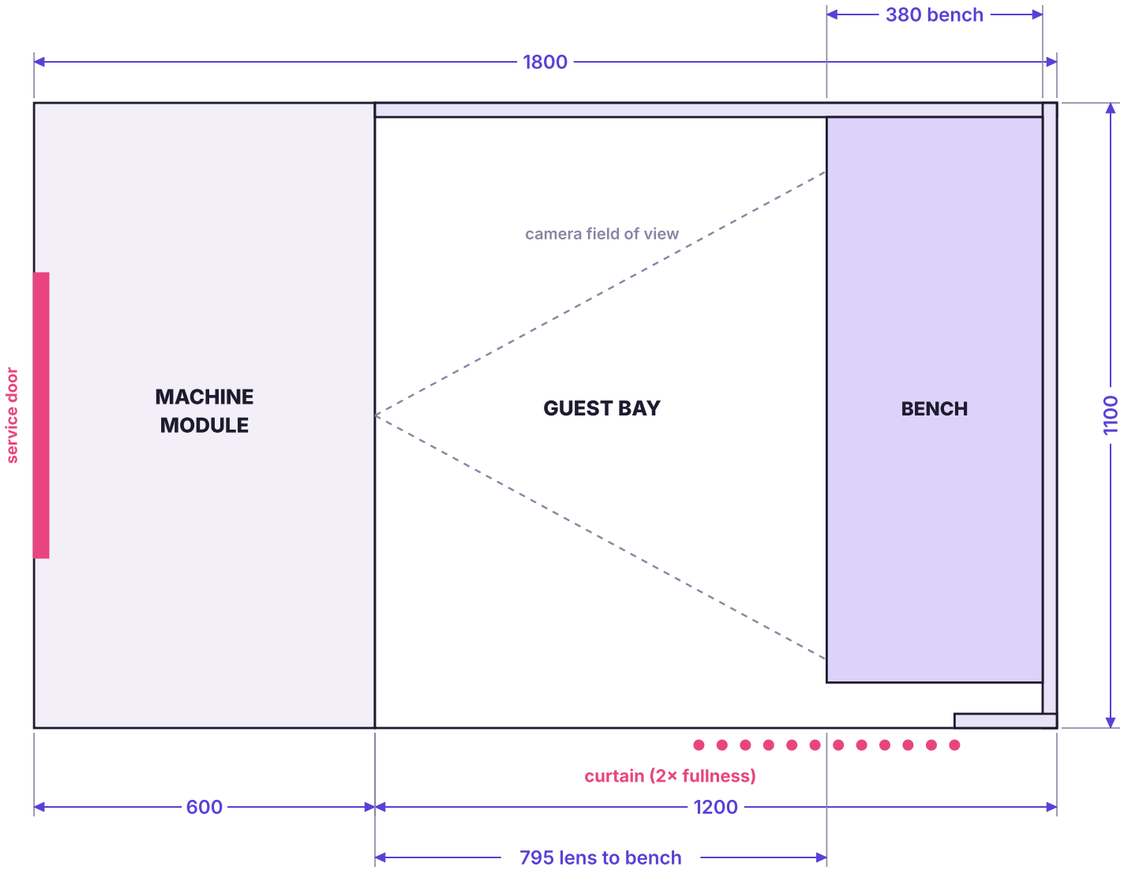

PLAN (roof off, front at bottom)

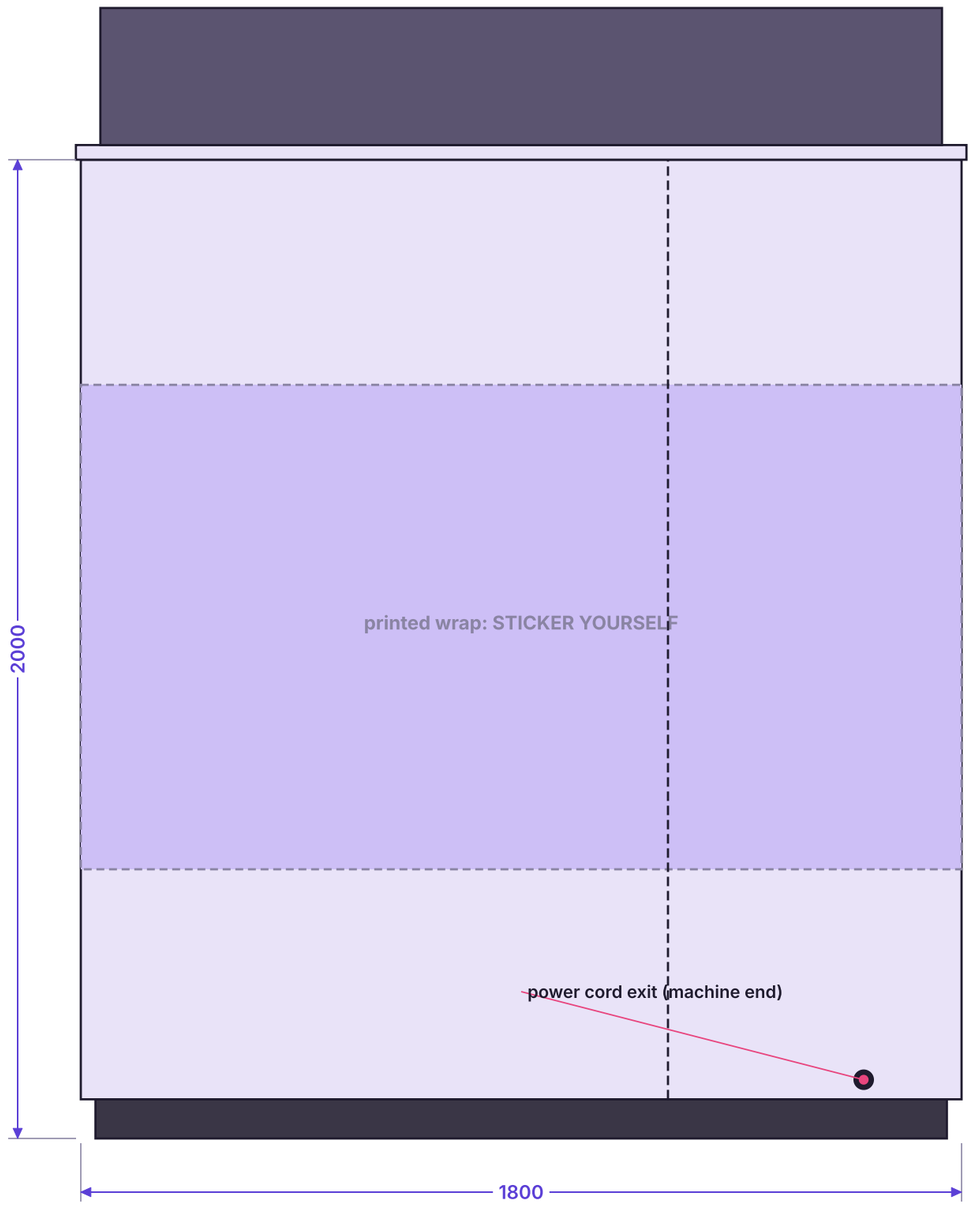

BACK ELEVATION


NOTES

- Leave 300 mm clear behind the booth for the power cord and airflow, and 600 mm at the machine end so the service door can open.
- The camera lens sits 795 mm from the bench front edge. With a 90°+ wide lens, that fits four people on the bench.
- The bay panels join the machine module along the seam at x = 600 (dashed).


MeSticker Photo Booth Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted	SHEET **F-03**	TITLE **Plan + back elevation**	REV **A**	DATE **2026-10-24**

F-04 · Inside elevations

A: camera wall seen from the bench. B: section through the machine module, looking at the end wall

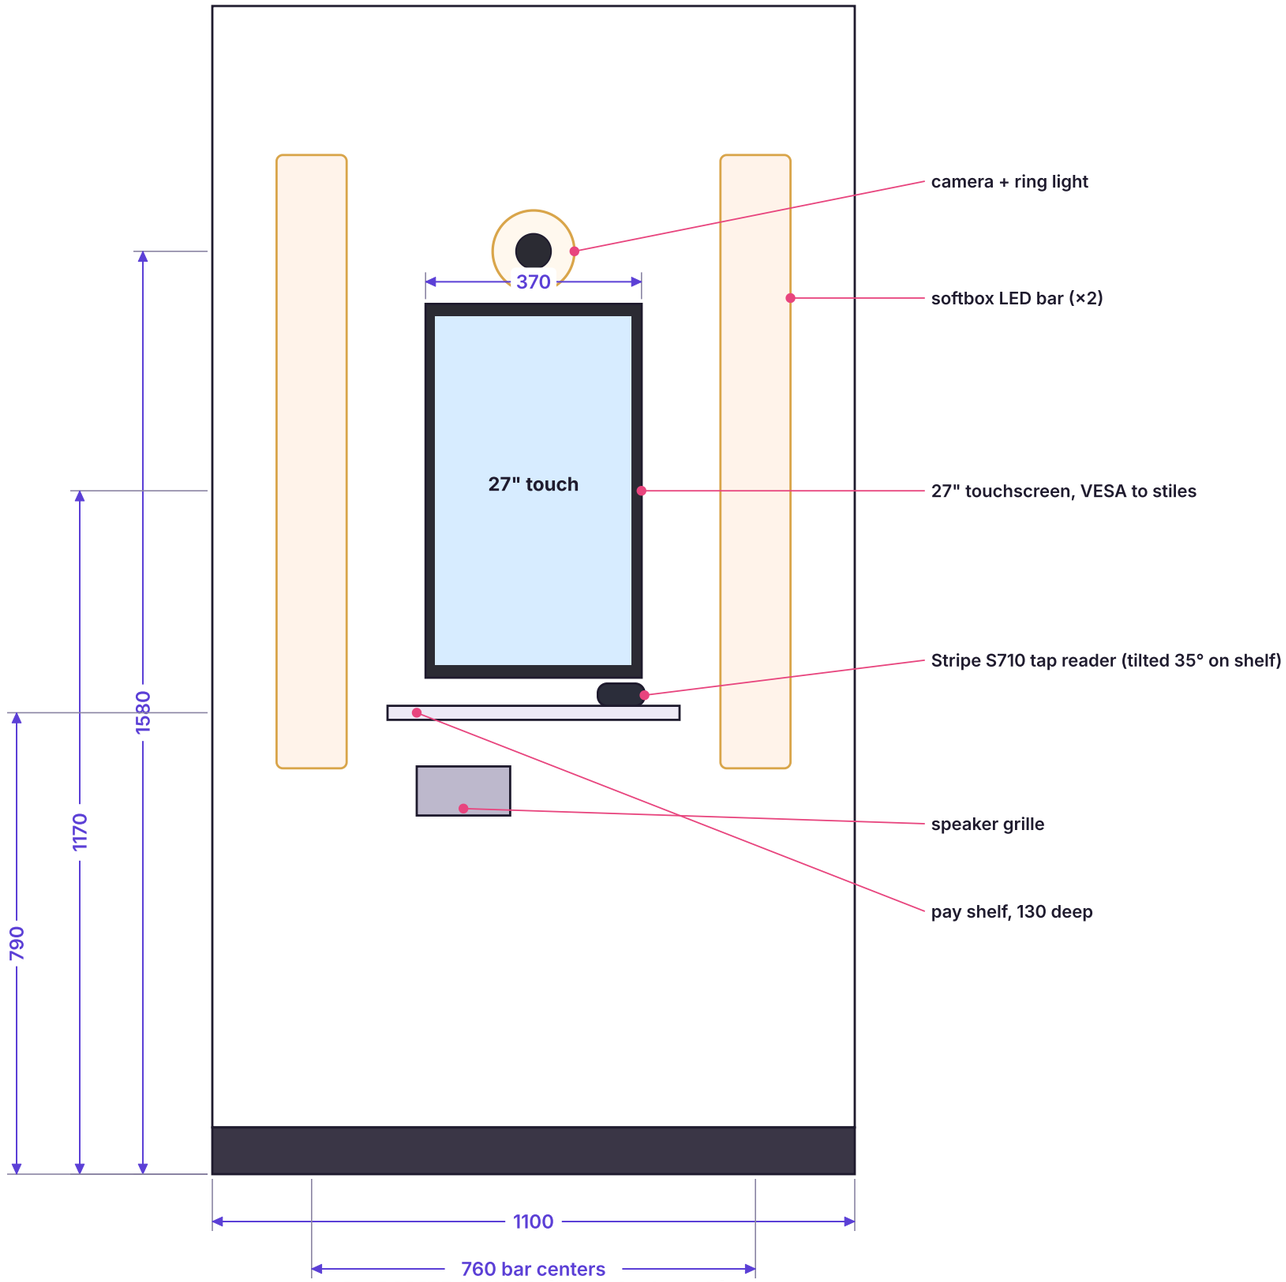

A · CAMERA WALL (from the bench)

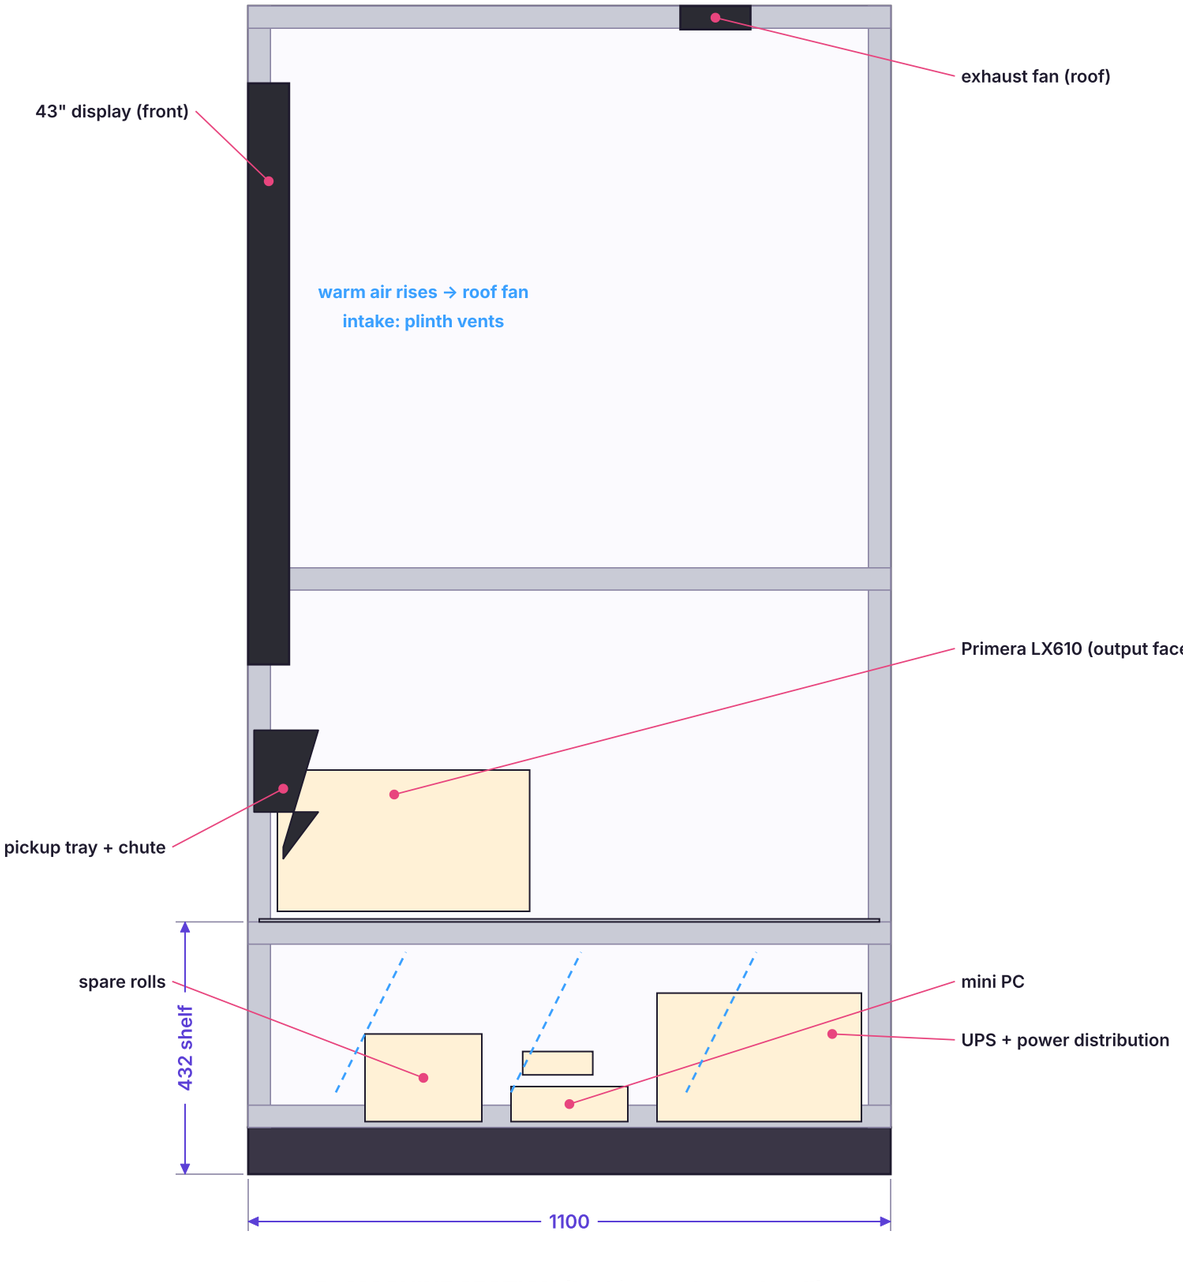

B · MACHINE SECTION (looking at the end wall)

MeSticker Photo Booth


Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted

SHEET	TITLE	REV	DATE
F-04	Inside elevations	A	2026-10-24

F-05 · Steel frame + tube cut list

1.5" (38.1 mm) square tube, 16 ga. M = welded machine module. B-* = bolt-together bay sub-frames

- M · machine module (welded, rolls in whole)
- B-end · bay end wall frame
- B-back · bay back wall frame
- B-front · pillar + header frame
- B-floor · threshold + floor joists
- B-roof · roof joists

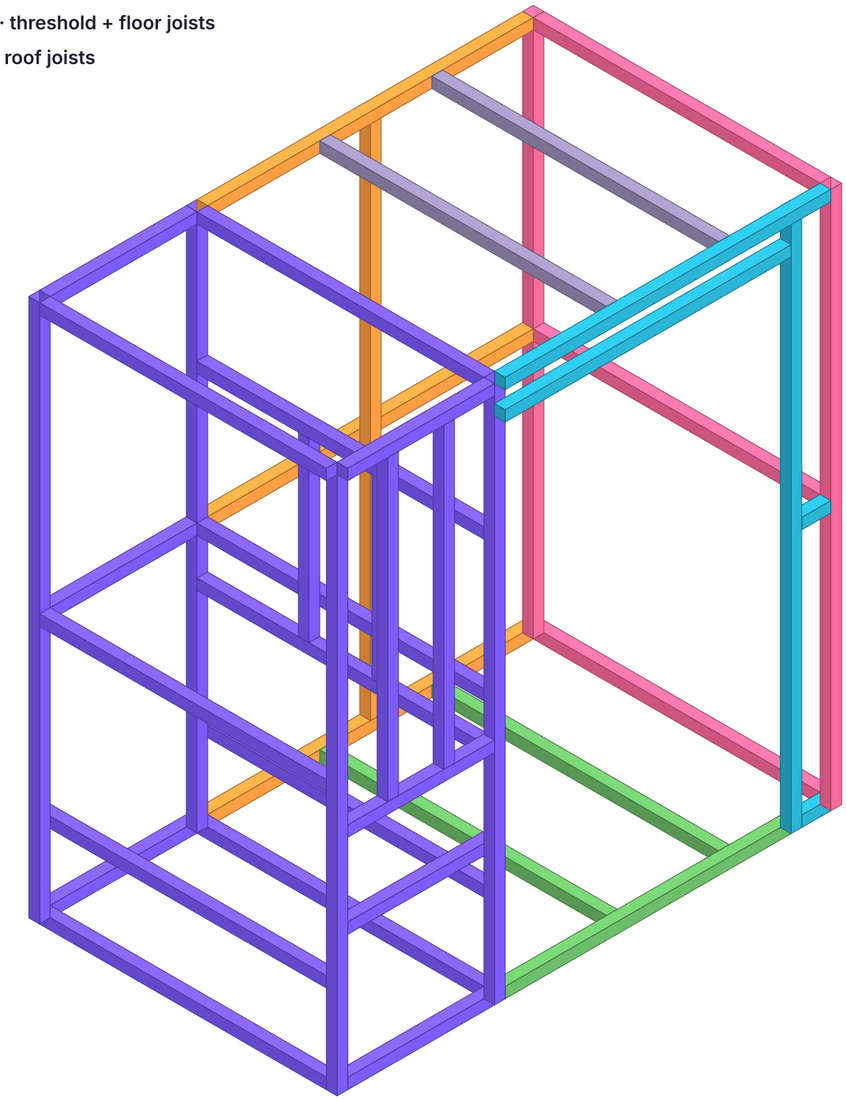

front-left corner (origin)

SUB-FRAME	PART	CUT LENGTH	QTY
B-back	Center stile	1843.8	1
B-back	X rail bottom	1161.9	1
B-back	X rail mid	1161.9	1
B-back	X rail top	1161.9	1
B-end	Post	1920	2
B-end	Y rail bottom	1023.8	1
B-end	Y rail mid	1023.8	1
B-end	Y rail top	1023.8	1
B-floor	Floor joist	1023.8	2
B-floor	Threshold rail	1020	1
B-front	Pillar post	1920	1
B-front	Header top rail	1161.9	1
B-front	Header lower rail	1020	1
B-front	Pillar rail	103.8	2
B-roof	Roof joist	1023.8	2
M	Post	1920	4
M	Display mount stile	1063.8	2
M	Y rail bottom	1023.8	2
M	Y rail mid	1023.8	2
M	Y rail top	1023.8	2
M	Printer shelf rail	1023.8	2
M	Camera wall rail	1023.8	2
M	Touchscreen mount stile	631.9	2
M	X rail bottom	523.8	2
M	X rail mid	523.8	1
M	X rail top	523.8	2
M	Front face rail	523.8	2

Total 46.6 m of tube. Buy ≈ 9 × 20 ft (6.1 m) sticks incl. 12% waste.

FRAME NOTES


- Cut lengths are clear lengths between posts (butt joints). Add-ons not shown: caster plates, VESA mount plates, door sub-frame, sign mounting tabs.
- Bay sub-frames bolt to the machine posts with 6 mm steel tabs and M8 bolts into rivnuts (F-09). Every bay frame comes apart for doorways.
- Powder-coat after welding. Mask the rivnut faces.

F-06 · Panel drawings

Flat panels as cut, viewed from outside. Cutouts dimensioned from the bottom-left corner of each panel


M1 · Machine front

3 mm ACM, gloss white

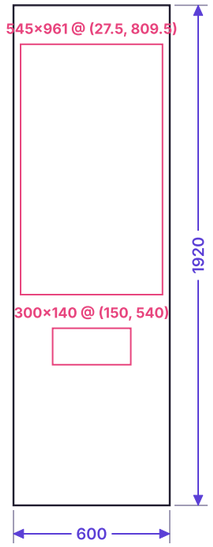


M2 · Machine end wall

3 mm ACM, gloss plum

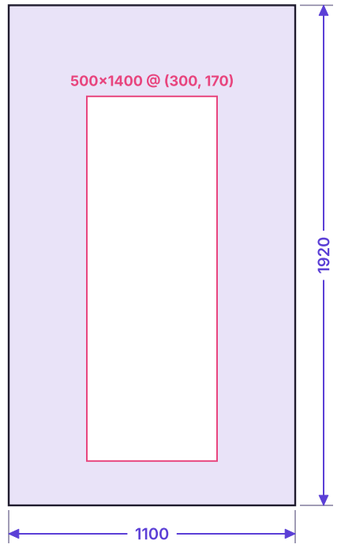


M4 · Camera wall

3 mm ACM, gloss white

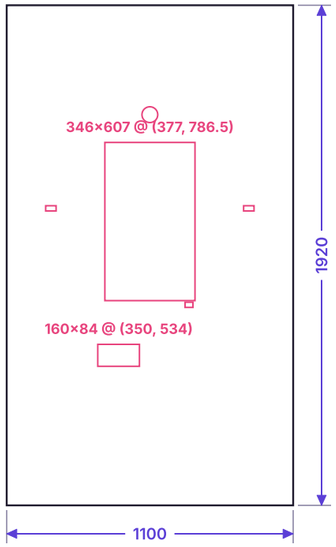


M5 · Machine roof

3 mm ACM, gloss plum




B1 · Bay back wall

3 mm ACM, gloss plum (wrapped)

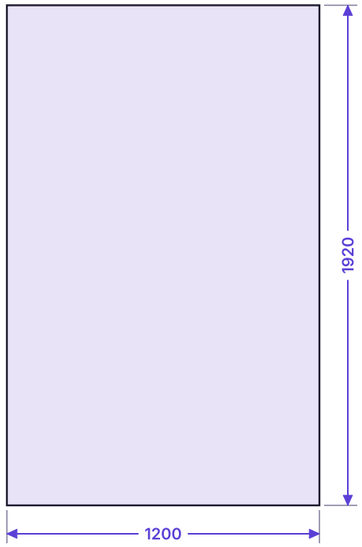

B2 · Bay end wall

3 mm ACM, gloss plum (wrapped)

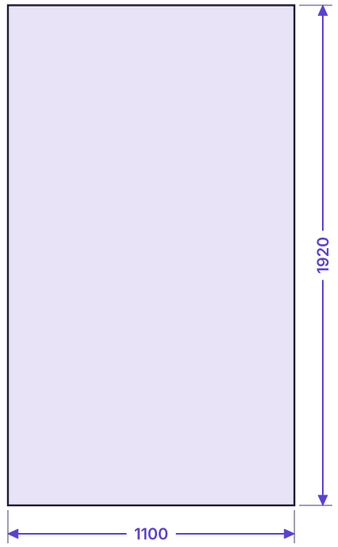


B3 · Front pillar

3 mm ACM, gloss plum



B5 · Bay roof

3 mm ACM, gloss plum

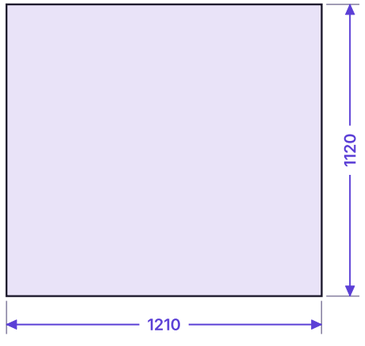

PANEL NOTES

- Cut on a CNC router with a V-groove bit if folded returns are wanted. DXF files of every panel are in the package.
- Cutout sizes include 5 mm clearance. Displays overlap the panel face from behind.
- Small slots on M4 are cable pass-throughs for the softboxes and the reader.
- Orient the protective film so the gloss face is outside.

MeSticker Photo Booth Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted	SHEET **F-06**	TITLE **Panel drawings**	REV **A**	DATE **2026-10-24**


F-07 · Panel schedule + sheet nesting


4×8 ft (1220 × 2440 mm) sheets. Simple guillotine layout with a 10 mm kerf allowance

CODE	PANEL	W	H	QTY	MATERIAL
M1	Machine front (aisle face)	600	1920	1	3 mm ACM, gloss white
M2	Machine end wall	1100	1920	1	3 mm ACM, gloss plum
M2D	Service door	530	1430	1	3 mm ACM on 1" tube sub-frame
M3	Machine back	600	1920	1	3 mm ACM, gloss plum (wrapped)
M4	Camera wall (inside)	1100	1920	1	3 mm ACM, gloss white
M5	Machine roof	610	1120	1	3 mm ACM, gloss plum
B1	Bay back wall (outside)	1200	1920	1	3 mm ACM, gloss plum (wrapped)
B2	Bay end wall (outside)	1100	1920	1	3 mm ACM, gloss plum (wrapped)
B3	Front pillar	180	1920	1	3 mm ACM, gloss plum
B4	Front header	1020	100	1	3 mm ACM, gloss plum
B5	Bay roof	1210	1120	1	3 mm ACM, gloss plum
B6	Backdrop liner (end wall, inside)	1094	1890	1	3 mm ACM, printed backdrop vinyl
B7	Back wall liner (inside)	1194	1890	1	9 mm acoustic felt panel
B8	Bay floor deck	1161.9	1023.8	1	18 mm plywood + 3 mm rubber
P1	Plinth skirt, long	1740	70	2	3 mm ACM, black
P2	Plinth skirt, short	1040	70	2	3 mm ACM, black
S1	Sign face	1720	280	1	3 mm ACM, gloss black + printed logo

≈ 8 sheets of 3 mm ACM

Buy one spare for mistakes. The felt liner (B7) and plywood deck (B8) are separate.

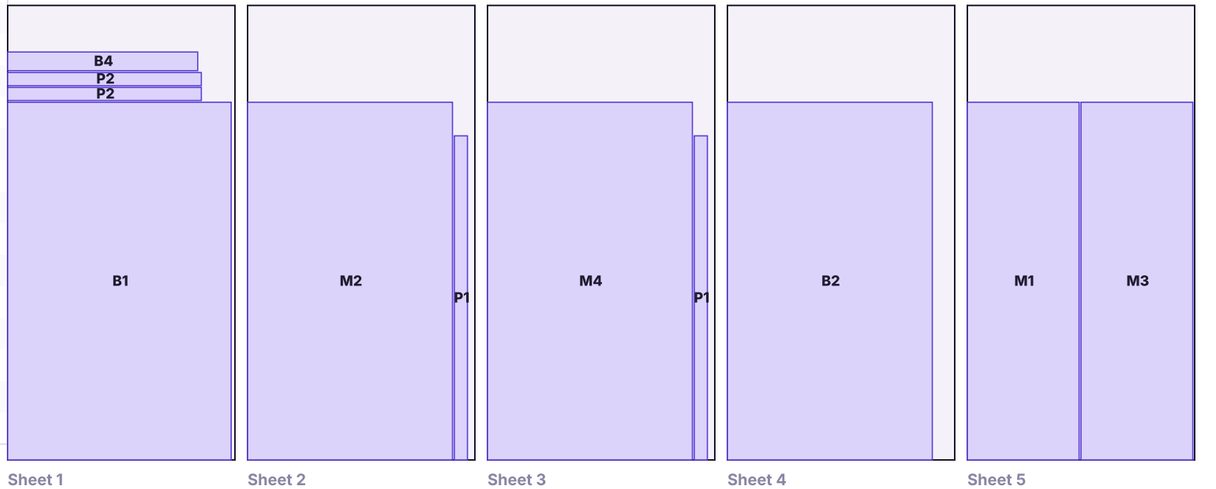

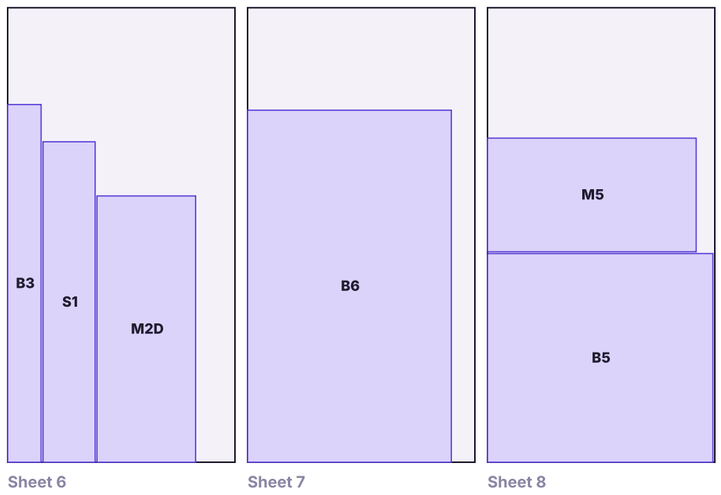


MeSticker Photo Booth

Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted

SHEET	TITLE	REV	DATE
F-07	Panel schedule + sheet nesting	A	2026-10-24

F-08 · Electrical + data

One 120 V / 15 A outlet. Everything is fed from the UPS in the machine module

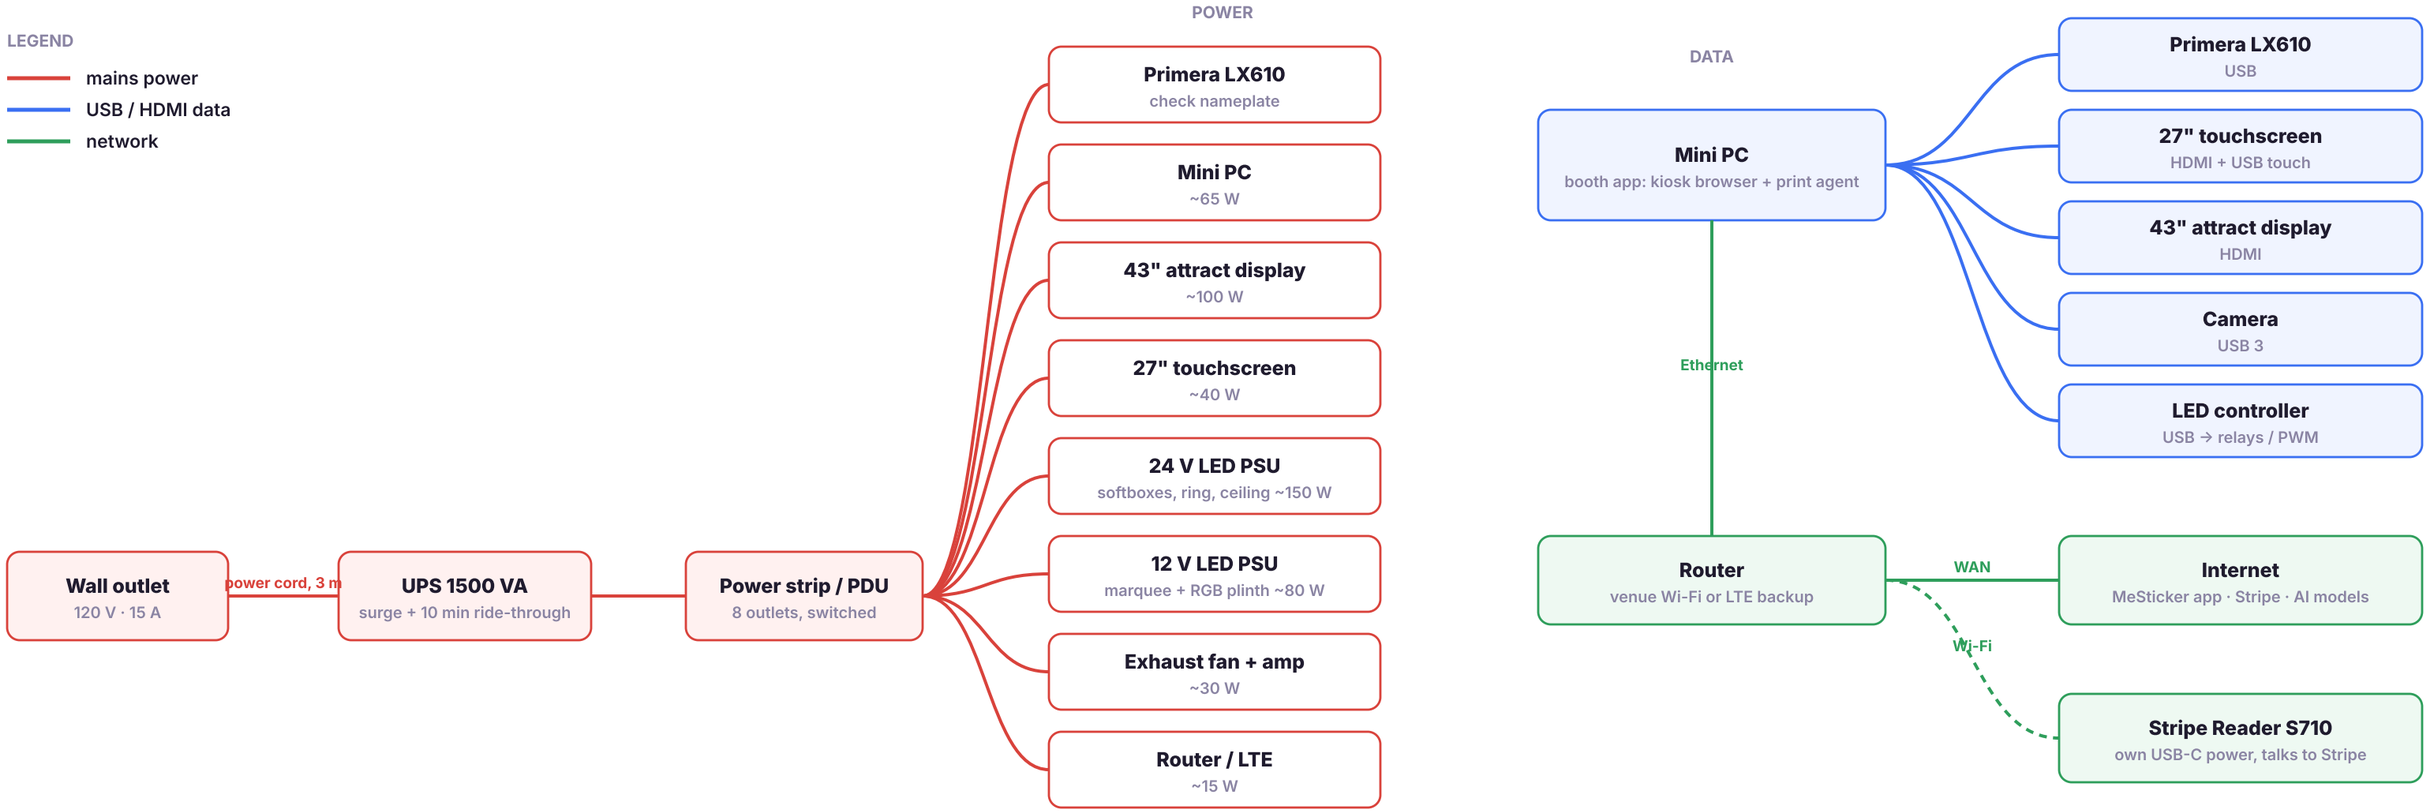


CIRCUIT	EST. LOAD
Electronics	~350 W
Lighting	~230 W
Printer	nameplate
Total (est.)	≈ 650–750 W ≈ 6 A

WIRING NOTES


- All mains wiring inside the machine module, on the PDU. Use UL-listed power supplies only, and strain-relieve the main cord where it exits.
- The low-voltage LED runs (24 V and 12 V) go through the frame tubes to the softboxes, ceiling panel, sign and plinth. The sign uses a quick-disconnect plug.
- The S710 reader talks to Stripe directly over Wi-Fi or Ethernet (server-driven integration). It needs no USB connection to the PC.
- Fit an LTE router as a backup for bad venue Wi-Fi. The booth should stop taking payment when it's offline.
- Leave a service loop on every cable so the printer shelf can slide out.

F-09 · Details


D1 · Bay-to-machine joint

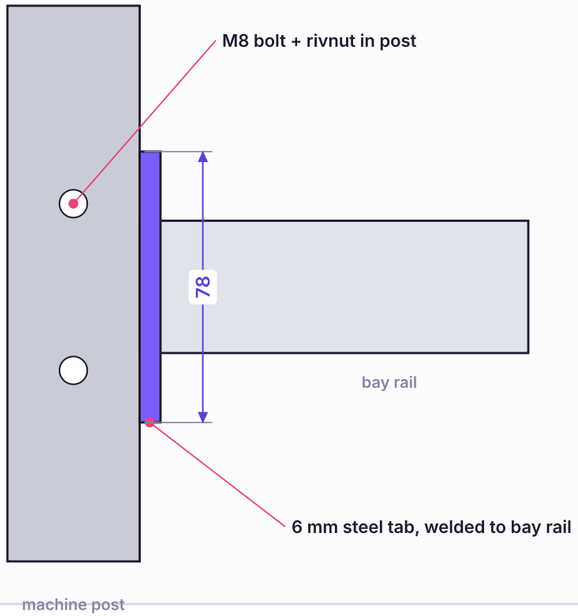


D2 · Caster + leveler corner

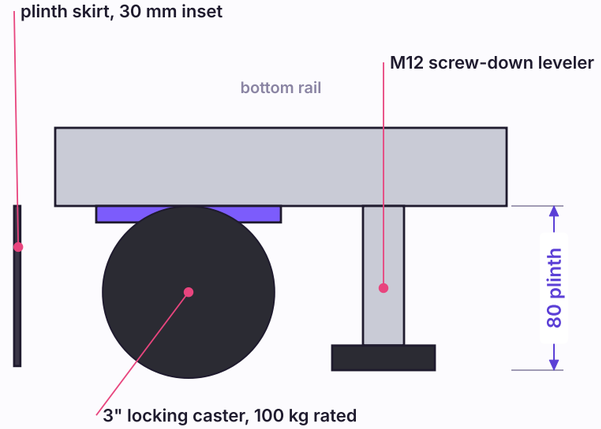


D3 · Pickup chute (section)

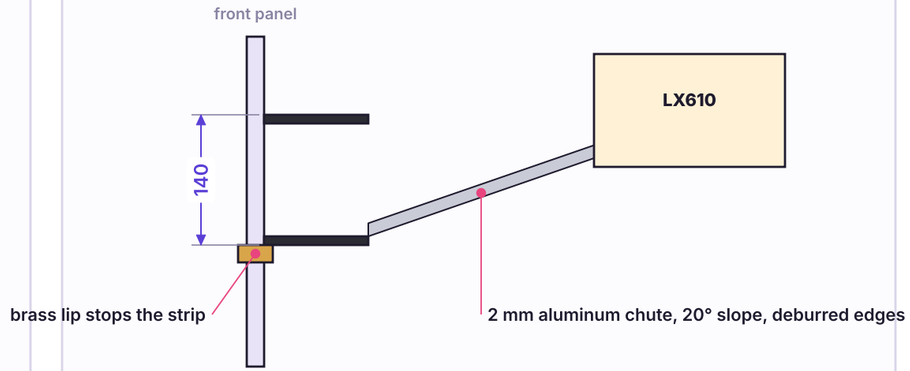


D4 · Curtain rod

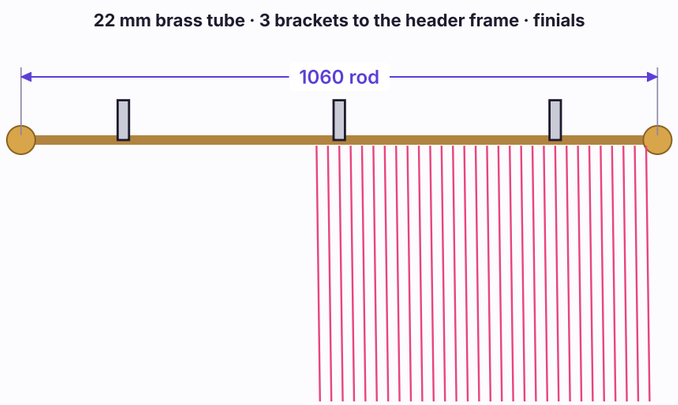

D5 · Marquee sign (section)

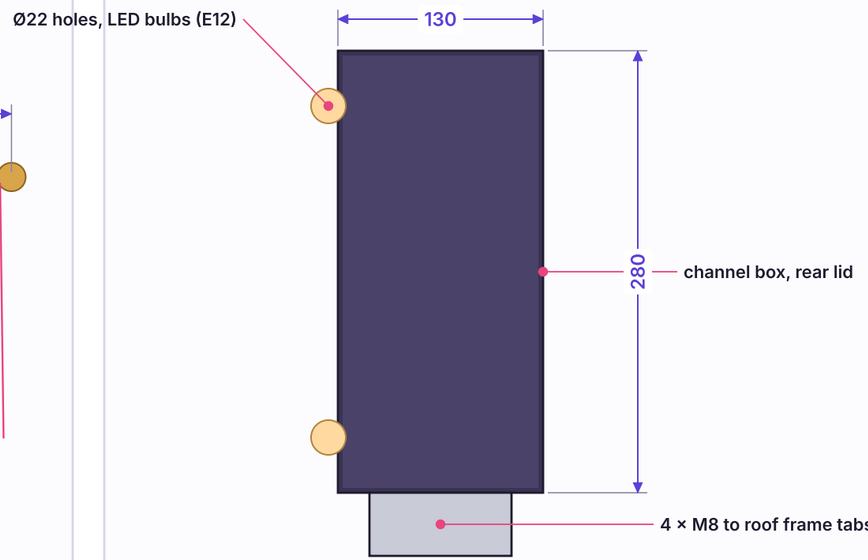

D6 · Service door (machine end)

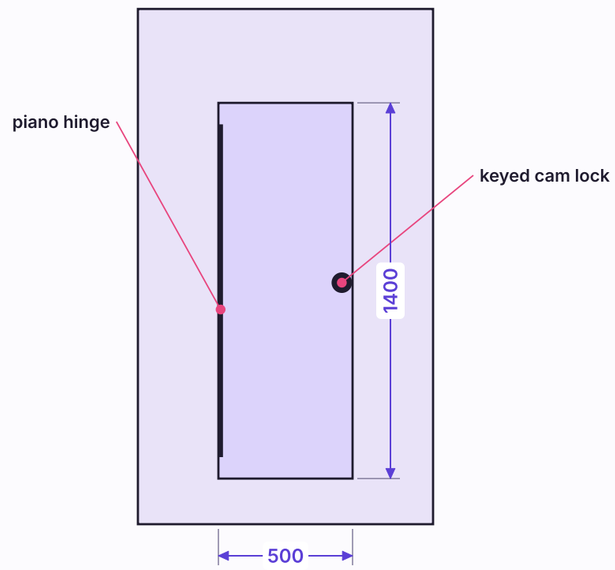


MeSticker Photo Booth

Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted


SHEET	TITLE	REV	DATE
F-09	Details	A	2026-10-24

F-10 · Assembly sequence

Exploded view: machine module (purple frame) stays whole. Bay sub-frames and panels bolt on at the venue

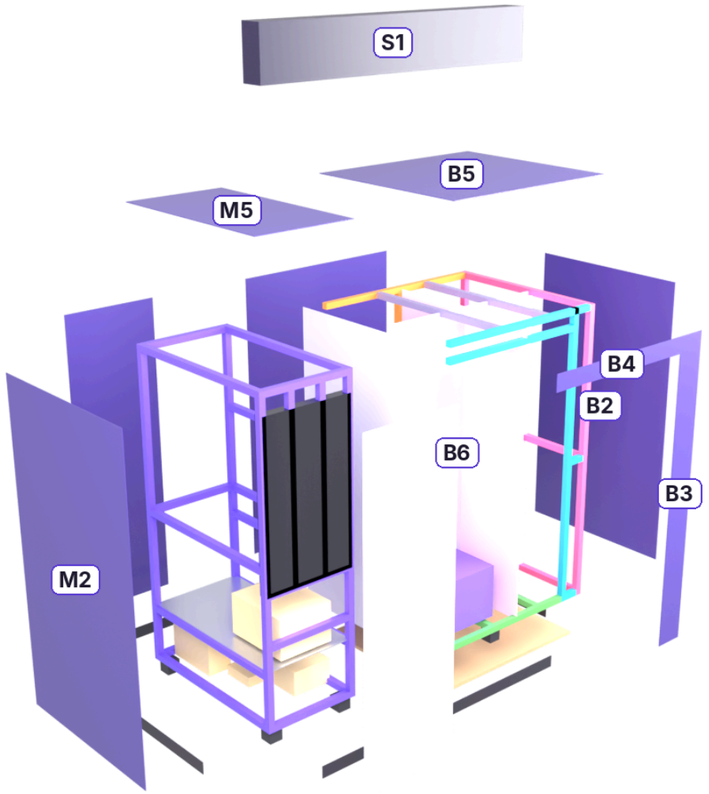

Machine module M (purple frame) stays welded. Bay sub-frames + panels shown pulled apart. Codes match F-06 / F-07.

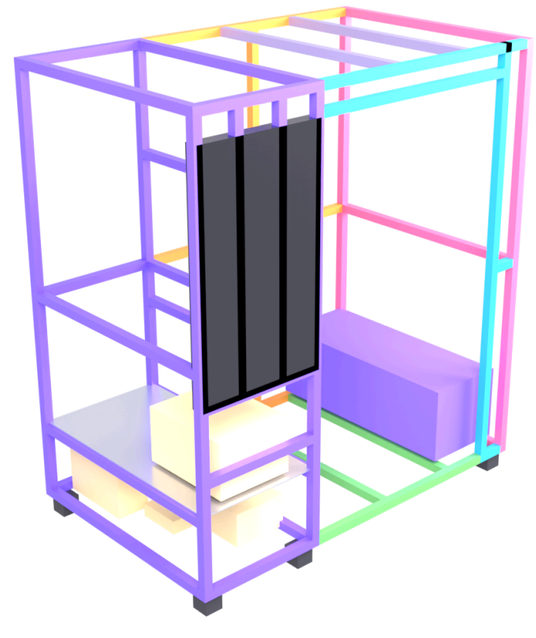

Frame + equipment, panels off

INSTALL (VENUE)

- Roll the machine module in. Bolt the bay end, back and front frames to it, then the floor and roof joists. Drop in the floor deck and bench.
- Hang the bay panels and liners, then the roof panels. Lift the sign on and plug it in. Hang the curtain. Level all corners with the levelers, then lock the casters.

BUILD ORDER (SHOP)

- Weld the machine frame (M). Fit the caster plates, VESA plates and the printer shelf. Powder-coat.
- Weld the 5 bay sub-frames. Test-fit them to M with M8 bolts, then mark and unbolt.
- Cut the panels from DXF (F-06, F-07). Dry-fit, then rivet or VHB-bond the M panels. Bay panels go on their sub-frames.
- Fit the electronics in M (F-04 B, F-08). Run the LED leads through the tubes. Bench-test the whole booth.