

- Home
- Docs
- Form
- My Chart
- Experience
- Skills
- Lug
- Select Table
- User Table
- Beams
- Chart
- Math Example
- Quadratic
- About Me

Geometry

Single

Double

D (hole)**40**

Dp (pin)**30**

t1 (outer)**20**


t2 (center)**16**

g (gap)**14**

w2 (center width)**100**

w1 (outer width)**120**

e (edge distance)**36**

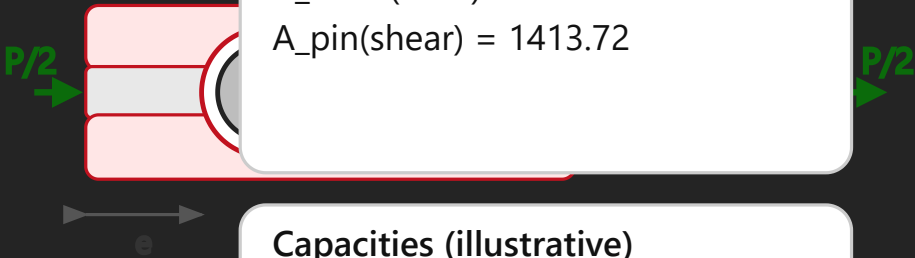

Derived Areas

A_{net} = 1600.00

A_{bear} (each) = 600.00

A_{bear} (total) = 1200.00

A_{pin}(shear) = 1413.72

Capacities (illustrative)

P_{net} = 384000.0

P_{bearing} = 660000.0

P_{pin}(shear) = 424115.0

P_{governing} = 384000.0

Allowables (illustrative)

σ_{t,lug}

240

σ_{b,lug}

550

τ_{pin}

300

σ_{b,pin}

550

Units must be consistent with geometry (e.g., mm + MPa → N). Replace these with values from AFFDL/MMPDS for actual design work.