




Solder pads for the Raspberry Pi




EEPROM that can be re-written by software using the AT28C256 programming software from the MSX-DOS prompt

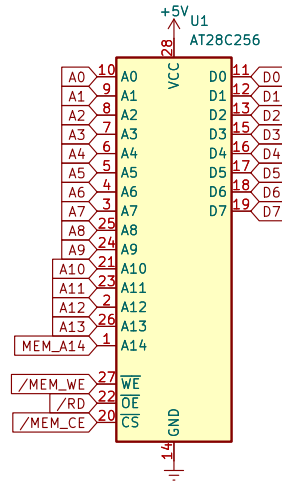


Jumpers to select ROM Bank, and enable the EEPROM for writing. J2 is optional (may be permanently closed with solder) since write protection is controlled via software.




Pullups for the EEPROM Control signals



CPLD to decode MSX BUS and serial-parallel conversion between MSX and Raspberry Pi

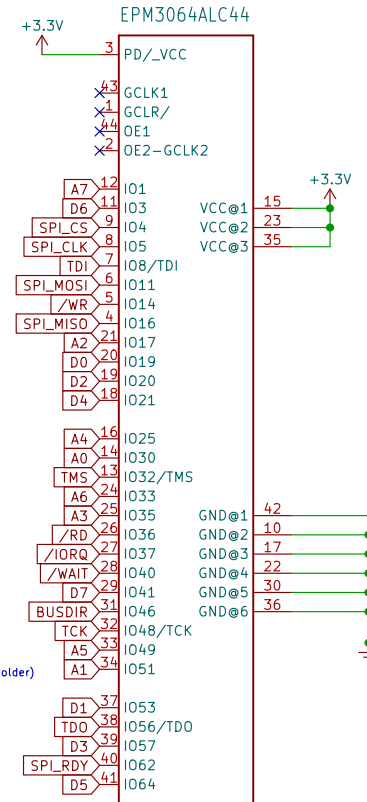

Flashing Led, driven by the SPLClock signal.

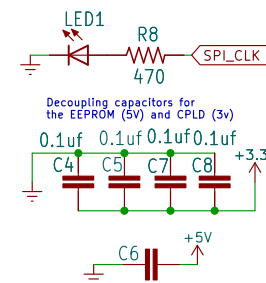

MSXPi Interface V1.0.1 Rev.2
RCC © 2017 – 2023

MSXPi interface – connect MSX computer to Raspberry Pi
EEPROM AT28C256 re-writable from MSX-DOS
EEPROM software: https://github.com/costarc/msxcart_flash32k

2023-02-26