

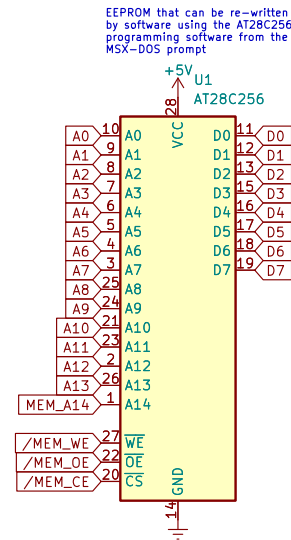



Solder pads for the Raspberry Pi




Jumpers to select ROM Bank, and enable the EEPROM for writing.




Pullups for the EEPROM Control signals



CPLD to decode MSX BUS and serial-parallel conversion between MSX and Raspberry Pi

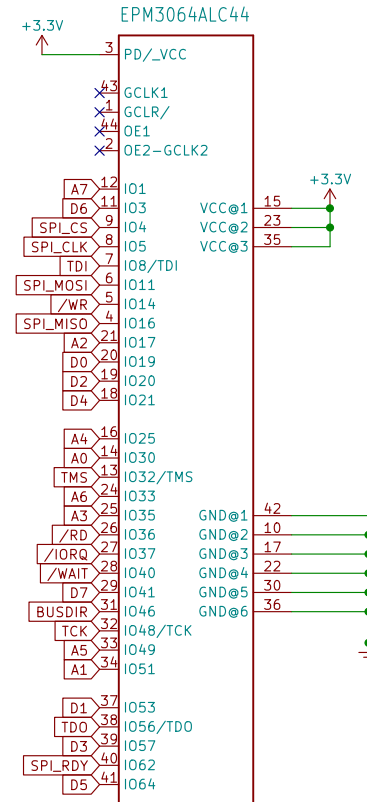

Flashing Led, driven by the SPLClock signal.

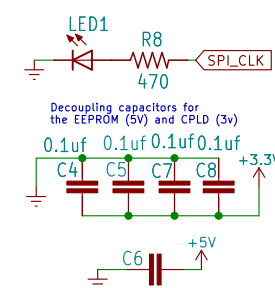

MSXPi Interface V1.0.1 Rev.1
RCC © 2022

MSXPi interface – connect MSX computer to Raspberry Pi
EEPROM AT28C256 re-writeable from MSX-DOS
EEPROM software: https://github.com/costarc/msxcart_flash32k

2022-12-25