


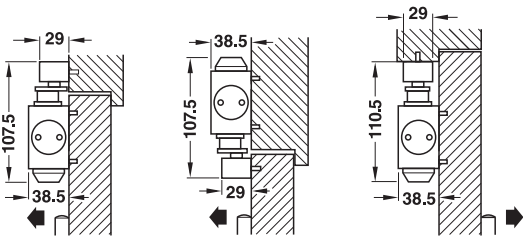



DCL 61

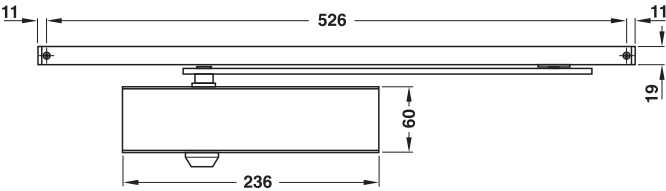

Standard installation  
(door leaf installation)  
on pull side



Kopfmontage  
(Sturzmontage) auf der  
Bandseite



Sturzmontage auf der  
Bandgegenseite

5

- Version: wahlweise mit Feststellung
- Installation: Suitable for standard or overhead installation on pull side and soffit installation on push side
- Adjustment facility: Closing speed continuously adjustable, backcheck adjustable, latching action continuously adjustable
- Door width: ≤1,100 mm
- Opening angle: ≤120°
- Hold-open angle: ≤115°
- Mounting: For DIN left hand and DIN right hand use

	Silver colour lacquered	Brass Polished
<b>DCL 61 set</b>		
1 Overhead door closer with guide rail, without hold open function	931.84.139	931.84.138
1 Overhead door closer with guide rail and hold open function	931.84.119	931.84.118

DGH-B-INT 2016, HDE-en, 03/16; Dimensional data not binding. We reserve the right to alter specifications without notice.