



Concealed mortise hinge

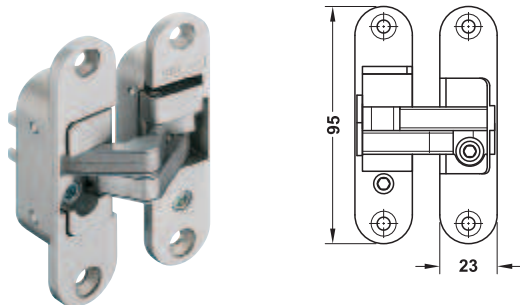


- Area of application: For wooden frames, for flush wooden interior doors
- Opening angle: $\leq 180^\circ$
- Door width: $\leq 1,000$ mm
- Door height: $\leq 2,000$ mm
- Door thickness: ≥ 40 mm
- Size: 111.5 mm
- Adjustment facility: Continuously 3D adjustable: Height ± 1.5 mm, side and closing pressure ± 1 mm

Installation



Drilling pattern

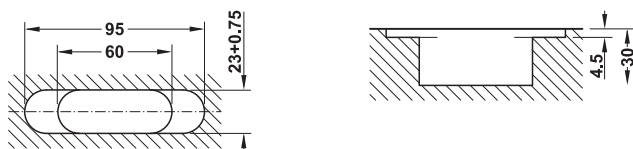


Number of hinges	Door width (mm)				
	600	700	800	900	1000
2	50 kg	46 kg	42 kg	40 kg	36 kg
3	56 kg	51 kg	48 kg	45 kg	40 kg
4	63 kg	57 kg	53 kg	50 kg	45 kg

Material	Finish	DIN left	DIN right
Zinc alloy	Nickel plated matt	927.32.036	927.32.046


Packing: 1 or 3 pieces

Concealed mortise hinge

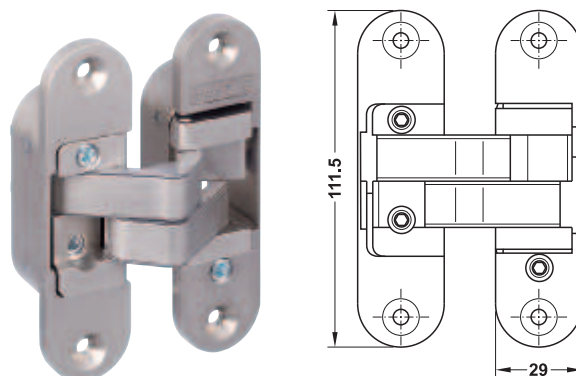


- Area of application: For wooden frames, for flush wooden interior doors
- Opening angle: $\leq 180^\circ$
- Door width: $\leq 1,000$ mm
- Door height: $\leq 2,000$ mm
- Door thickness: ≥ 40 mm
- Size: 111.5 mm
- Adjustment facility: Continuously 3D adjustable: Height ± 1.5 mm, side and closing pressure ± 1 mm

Installation

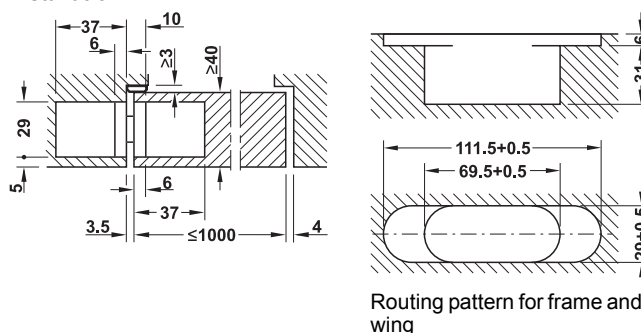

Routing pattern for frame and wing

Weight chart

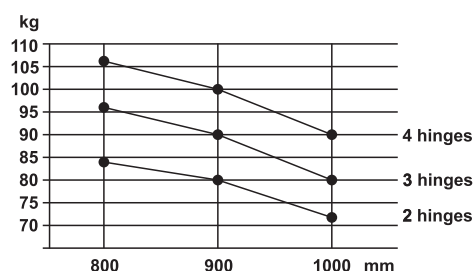

Material	Finish	DIN left	DIN right
Zinc alloy	Nickel plated matt	927.32.006	927.32.016
	Nickel plated polished	927.32.007	927.32.017
	Gold coloured polished	927.32.008	927.32.018