

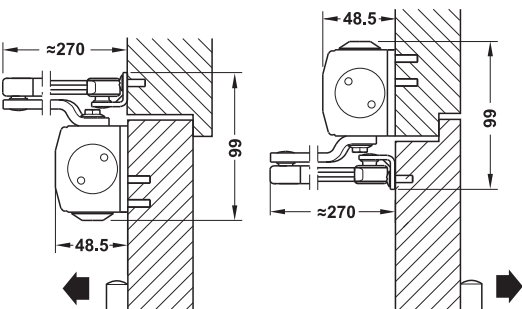


DCL 80
EN 2, 3, 4



5

Fire resistance and smoke control

F Tested for fire resistant and smoke control doors.

- Version: Safety valve against overloading, with standard arm or hold-open arm (optional)
- Adjustment facility: Closing force, closing speed and latching action adjustable, closing speed and latching action continuously adjustable from the front via valve
- Installation: Standard installation (door leaf installation) on pull side and overhead installation (transom fixing) on push side
- Closing force: 2, 3, 4 in compliance with EN 1154
- Door width: ≤1,100 mm
- Opening angle: ≤180°
- Hold-open angle: approx. 70–150°
- Mounting: For DIN left and DIN right hand use
- Standard: Certified in compliance with EN 1154:1996/A1:2002
- Class:

4	8	2/3/4	0/1	1	4
---	---	-------	-----	---	---

		Silver colour lacquered
DCL 80 Set with standard arm		
1 DCL 80 with standard arm	F	931.26.309
1 basic closer	–	931.26.009
1 standard arm	–	931.26.109
DCL 80 Set with hold-open arm		
1 DCL 80 with hold-open arm	–	931.26.319
1 basic closer	–	931.26.009
1 hold-open arm	–	931.26.119