

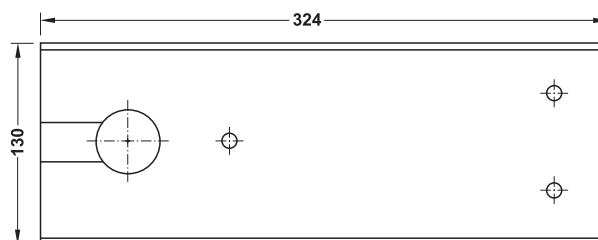
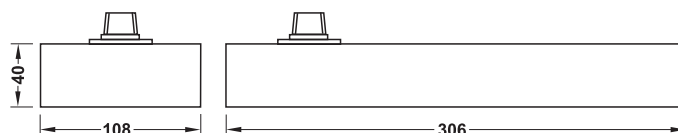



## DCL 41, DCL 43

EN 3



Including top centre set

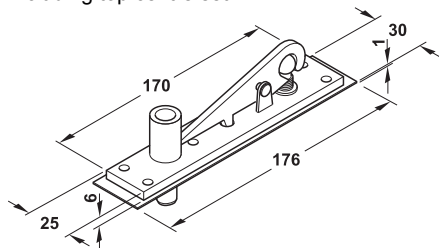

5

### Fire resistance and smoke control

**F** Tested for fire resistant and smoke control doors.


- Area of application: For double action doors
- Version: Optionally with hold open function at an opening angle of 90°, replaceable spindle insert, with top centre set
- Closing force: 3
- Door weight: ≤105 kg
- Door width: ≤950 mm
- Opening angle: ≤130°
- Material: Cover plate: Stainless steel
- Finish: Cover plate: Satin finish
- Mounting: Suitable for DIN left hand, DIN right hand and double action doors
- Standard: Certified in compliance with EN 1154:1996/A1:2002
- Class: 

3	8	3	0/1	1	3
---	---	---	-----	---	---

		Cat. No.
<b>DCL 41</b>		
DCL 41 hold open angle 90°	—	932.84.030
<b>DCL 43</b>		
DCL 43 without hold open function	<b>F</b>	932.84.034

### Spindle inserts

For DCL 41 / 43



- Area of application: To increase the floor clearance (e.g. for doors with thresholds or floors fitted with carpets)
- Version: With radial serrations

Length L mm	Cat. No.
5	932.84.911
10	932.84.912
25	932.84.915