


DCL 11, DCL 12
EN 3

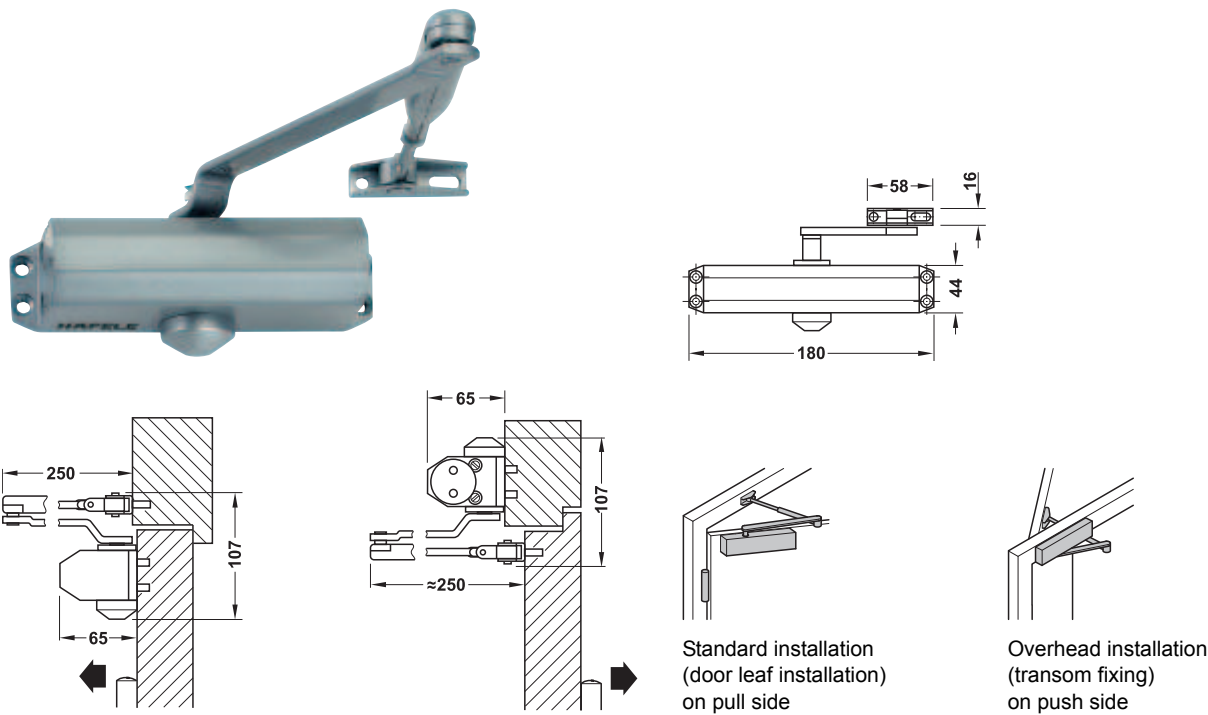

5

Fire resistance and smoke control
F Tested for fire resistant and smoke control doors.

• Version:	With standard arm or interlocking hold-open arm (optional)						
• Installation:	Suitable for standard installation on pull side and overhead installation on push side						
• Adjustment facility:	Closing speed, backcheck and latching action adjustable, latching action continuously adjustable						
• Closing force:	3						
• Door width:	≤1,100 mm						
• Opening angle:	≤180°						
• Hold-open angle:	≤145°						
• Mounting:	For DIN left and DIN right hand use						
• Standard:	Certified in compliance with EN 1154:1996/A1:2002						
• Class:	<table><tr><td>4</td><td>8</td><td>3</td><td>0/1</td><td>1</td><td>3</td></tr></table>	4	8	3	0/1	1	3
4	8	3	0/1	1	3		

Supplied with
Door closer complete with arm assembly

		Silver coloured
DCL 11 set		
1 DCL 11 with standard arm	F	931.84.649
DCL 12 set		
1 DCL 12 with hold-open arm	–	931.84.659