


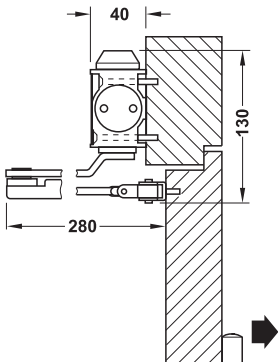
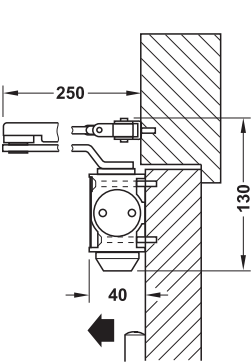


DCL 15, DCL 16  
EN 2-4



Standard installation  
(door leaf installation)  
on pull side



Overhead installation  
(transom fixing)  
on push side

Fire resistance and smoke control

**F** Tested for fire resistant and smoke control doors.

- Version: With standard arm or interlocking hold-open arm (optional)
- Installation: Suitable for standard installation on pull side and overhead installation on push side
- Adjustment facility: Closing speed, latching action adjustable
- Closing force: 2-4
- Door width: ≤1,100 mm
- Opening angle: ≤180°
- Hold-open angle: ≤145°
- Mounting: For DIN left and DIN right hand use
- Standard: Certified in compliance with EN 1154:1996/A1:2002
- Class: 

4	8	2-4	0/1	1	3
---	---	-----	-----	---	---

Supplied with

Door closer complete with arm assembly

		Silver colour lacquered
<b>DCL 15 set</b>		
1 DCL 15 with standard arm	<b>F</b>	931.84.629
<b>DCL 16 set</b>		
1 DCL 16 with hold-open arm	—	931.84.639