



EN 3

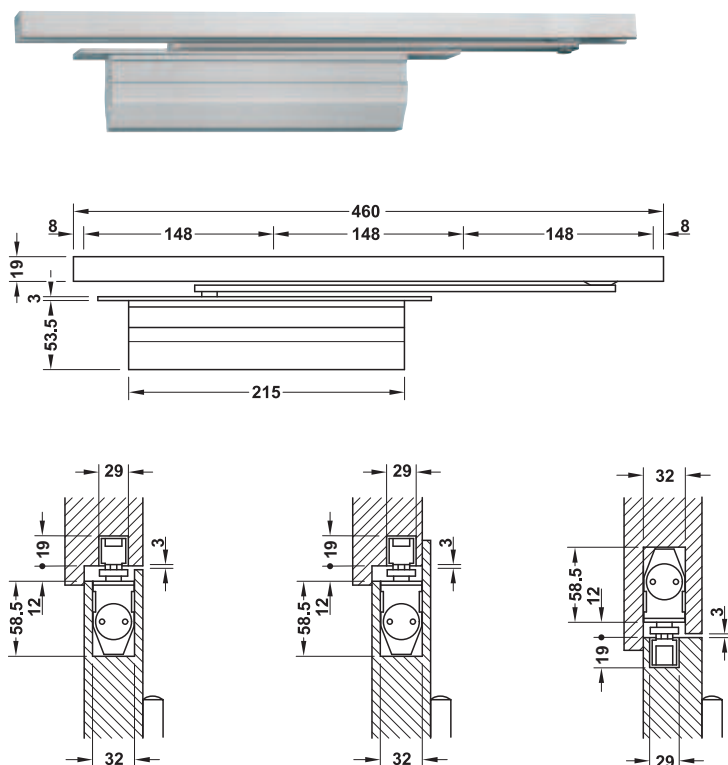


F Tested for fire resistant and smoke control doors.

- Area of application: Door closer and guide rail for concealed installation
- Adjustment facility: Closing speed continuously adjustable, latching action continuously adjustable
- Closing force: 3
- Door width: ≤950 mm
- For door thickness: ≥40 mm
- Opening angle: ≤120 °
- Hold-open angle: ≤115°
- Mounting: For DIN left and DIN right hand use
- Standard: Certified in compliance with EN 1154:1996/A1:2002
- Class:

3	8	3	0/1	1	3
---	---	---	-----	---	---

		Silver coloured	Gold coloured	Matt black
DCL 34 Set				
1 DCL 34 without hold-open function		931.84.049	931.84.048	931.84.043
1 DCL 34 with hold-open function	—	931.84.279	931.84.278	931.84.273

→ **Intumescent fire protection kit**



C = intumescent fire protection kit for DCL concealed door closers

Suitable for	Cat. No.
For DCL 34	950.11.124

Further notes on page 6.39