




DCL 84
EN 3

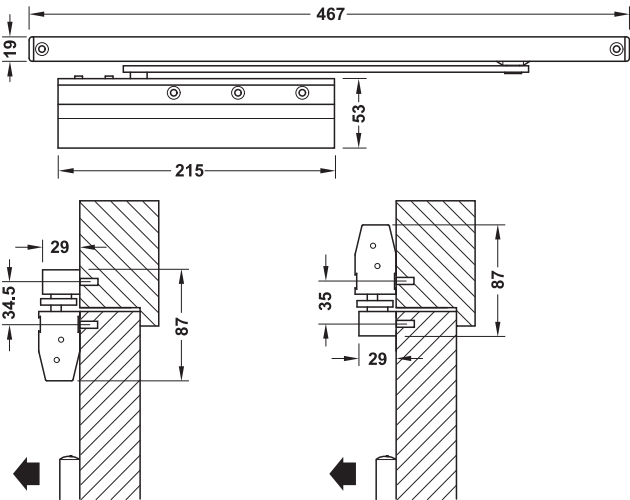

Standard installation
(door leaf installation) on pull side



Overhead installation
(transom fixing) on pull side

Fire resistance and smoke control

F Tested for fire resistant and smoke control doors.

- Version: With hold-open function (optional)
- Installation: Standard installation and overhead installation on pull side
- Adjustment facility: Closing speed continuously adjustable, latching action continuously adjustable
- Closing force: 3
- Door width: ≤950 mm
- Opening angle: ≤120°
- Hold-open angle: ≤115°
- Mounting: For DIN left and DIN right hand use
- Standard: Certified in compliance with EN 1154:1996/A1:2002
- Class:

| | | | | | |
|---|---|---|-----|---|---|
| 3 | 8 | 3 | 0/1 | 1 | 3 |
|---|---|---|-----|---|---|

| | | Silver coloured | Polished brass | Matt black |
|-------------------------------------|----------|-----------------|----------------|------------|
| DCL 84 Set | | | | |
| 1 DCL 84 without hold-open function | F | 931.84.319 | 931.84.318 | 931.84.313 |
| 1 DCL 84 with hold-open function | — | 931.84.329 | 931.84.328 | 931.84.323 |