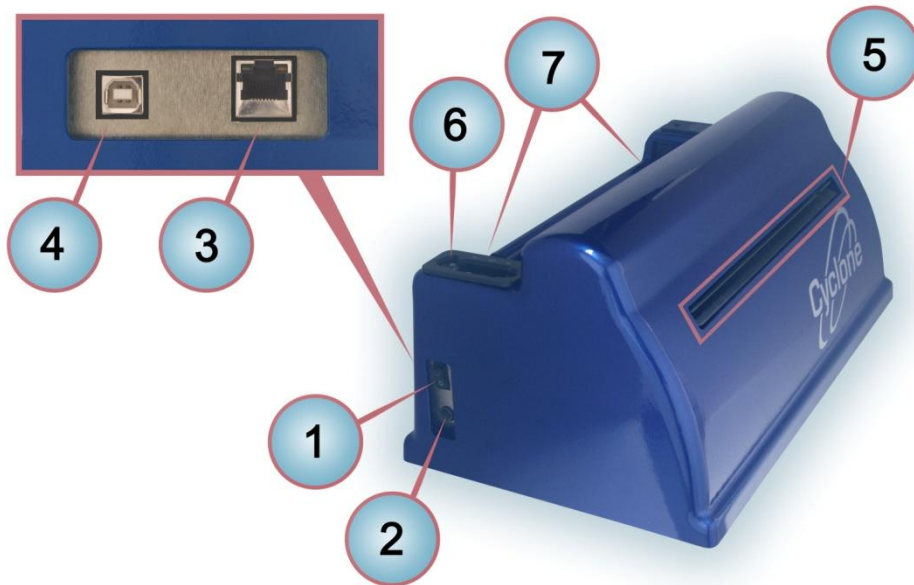# Cyclone, Trident & Phoenix (gold)
Braille Embosser Quick Setup Guide
www.brailler.com

1 - On/Off Switch
2 - Power Connection
3 - Ethernet Port
4 - USB Port
5 - Paper Exit Area
6 - Control Panel
7 - Paper Tractors

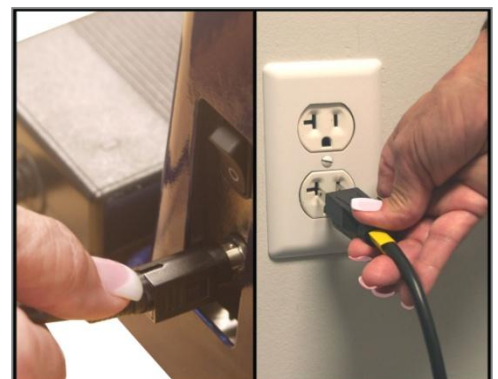|		
Step 1	Unpack the contents of the box. The box should include the following: Quick Setup Guide, Braille Embosser, power adapter with power cord, USB cable, Product Registration Form, CD-ROM.	
Step 2	Install the manuals, setup and discovery program from the CD-ROM onto your computer. Place the embosser on a flat, stable surface, with the embossers logo facing towards you.	
Step 3	Plug the power supply round connector into the embossers power receptacle. The flat edge of the round connector should be facing the 3:00 position. Then plug the supplied power cord into a grounded outlet.	

Step 4	Install paper in the paper tractors feeding in from the back of the embosser. Make sure the paper exit area in the front of the embosser is clear so the finished document can exit the embosser.
Step 5	Connect the USB cable to the Braille Embosser and then to your computer.
Step 6	Turn on the embosser. Your computer will display the "Installing the device driver software" bubble. Once installed the embosser will be in your printers named as Generic / Text Only. If you wish to rename your embosser, please use the step-by-step instructions to rename the embosser in the "USB Setup Manual" found on the CD-ROM that you installed on your computer in Step 2.
Step 7	After the driver is successfully installed, turn the power off and back on. Next, set the top-of-form on the paper by pressing the T-Button on the embossers control panel.
Step 8	Configure your Braille translator to send the files to the USB port that your embosser is connected to. We recommend reading the READ ME FIRST file along with the other manuals provided on the CD-ROM for complete information and instructions.

Enabling Technologies