

IMPACTO TEXTO


Interpoint high speed Braille - Printer

The IMPACTO TEXTO is a high speed printer of best quality. With a printing rate of 800 pages per hour the IMPACTO is predestinated for higher Braille editions.

The IMPACTO shows sharp and clear Braille outlines as well as infinite variable embossing depth, resulting from the particular shape of the embossing hammers. The number of moving parts has been reduced to a minimum in order to guarantee excellent reliability.

The equipment maintenance is very easy and quick to carry out. A time counter indicates when there is to undertake routine maintenance.

All printing parameters can be adjusted to the user's needs by dialogue with a convenient operation system. Its clearly organized user's guide and convenient help functions allow quick familiarization with all the print options of IMPACTO TEXTO.

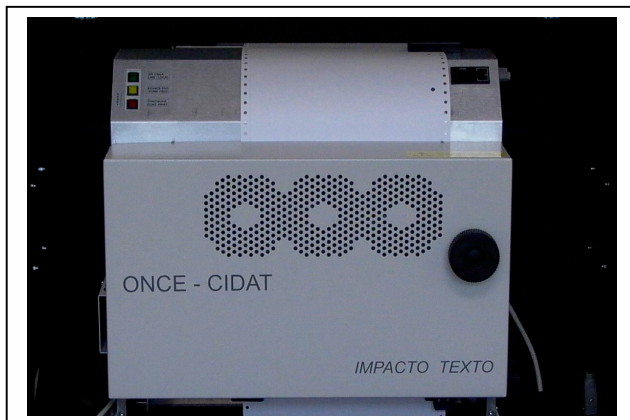

The layout preview shows how the text will appear on the paper.

The page layout and all the printing parameters chosen can be saved in separate configuration files and are available by pressing a button.

Management of files to be printed can be made with:

WINDOWS (95, 98, NT 4.0, ME, 2000, XP) oder MS-DOS

The IMPACTO TEXTO is conform to the standards of electromagnetic compability.

Technical Data IMPACTO TEXTO

Dimensions:

Width	830 mm
Length	500 mm
Height	1.360 mm

Weight:

Housing	95 kg
Printer	30 kg
Power Supply	7 kg

Printing rate:

approx. 800 pages/h
front side and rear side simultaneously

Printer buffer:

RAM + hard disk: 1 GB

Noise level:

68 dB(A) with cover closed

Paper formats:

continuous forms, fanfold
Weight: 140 - 175 g/m²
Width: 95 - 360 mm
Length: 6 - 13 inch

Data Braille output:

Adjustable by software-program

- Continuous printing
- 6- or 8 dots printing
- Line spacing: 2,5 / 5,0 / 7,5 mm
- Number of characters per line: 42

Controls:

ON / OFF-LINE switch
FORMFEED: page brake
CONTINUE: restart after paper out and interruption

Electronic connections

V24:

8 databits,
1 stopbit
Synchronisation: DTR or Xon/Xoff
Data rate: 9600 Baud
Character sets: as much as needed, user defined.

Interface: paralel or serial

Power requirements:

230 V (± 10%) 50 - 60 Hz
115 V (± 10%) 50 - 60 Hz

Power input:

standby	approx. 50 VA
printing operations	approx. 350 VA

ordering no.: HW-48000
