Conditional dry-air S5: all compatible explored points; no device confidence interval

Nearest source: all 69 records; ±50 dB zoom

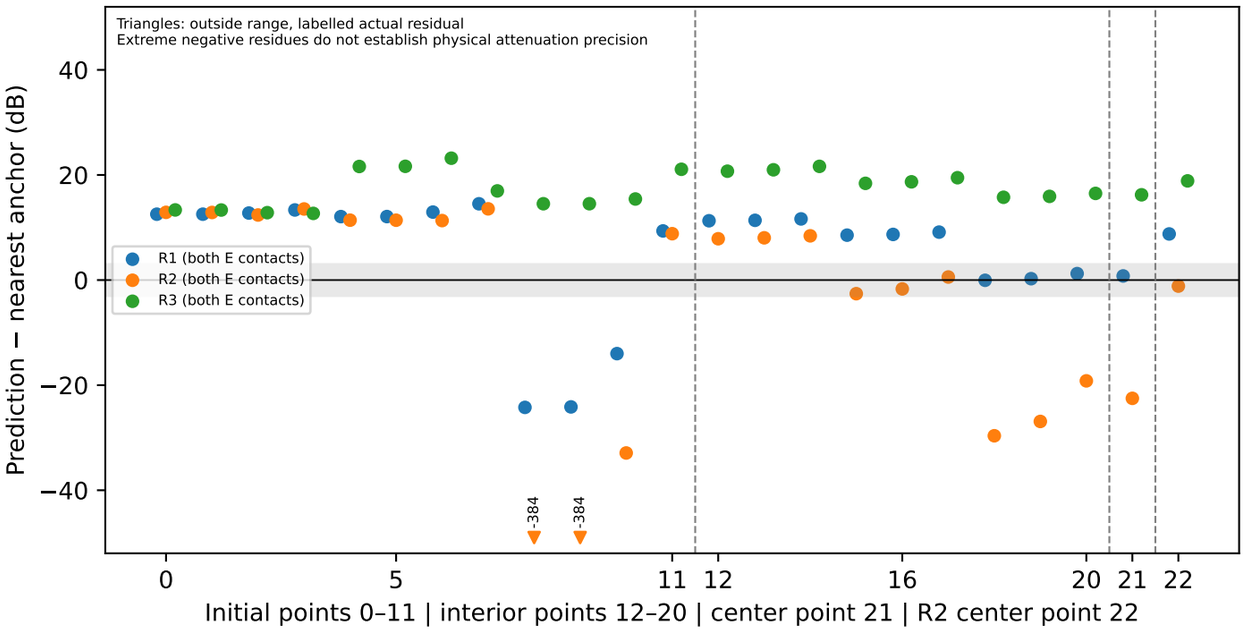

Nearest gate: all 69 records; ±50 dB zoom

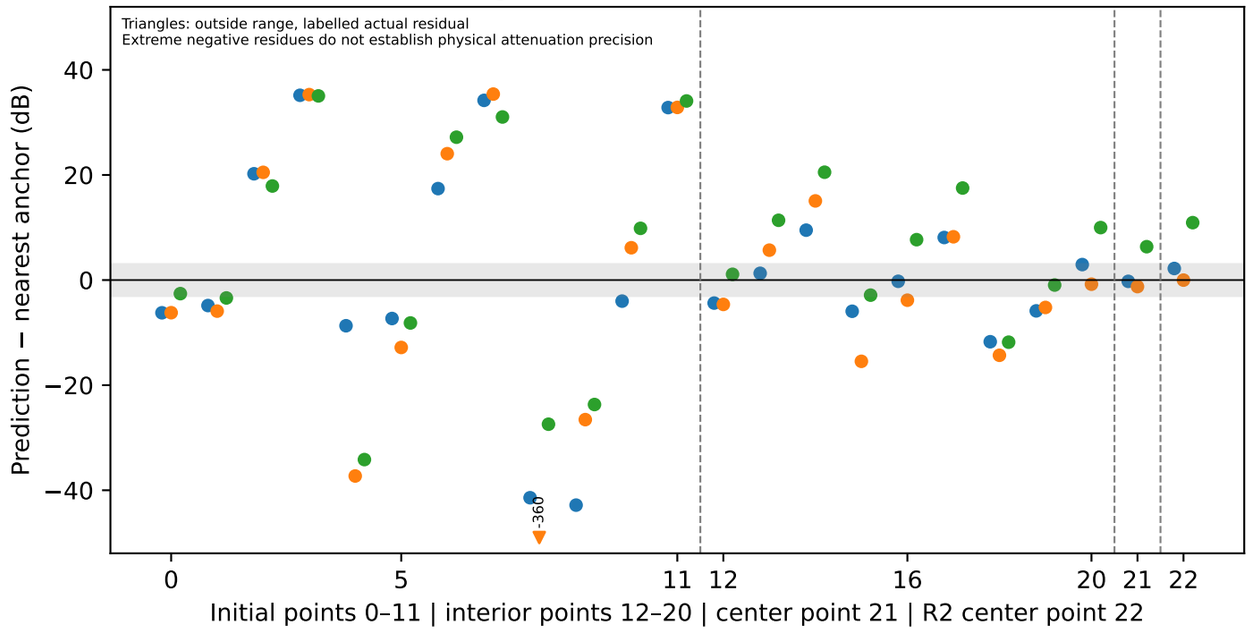

All-pad shell maxima

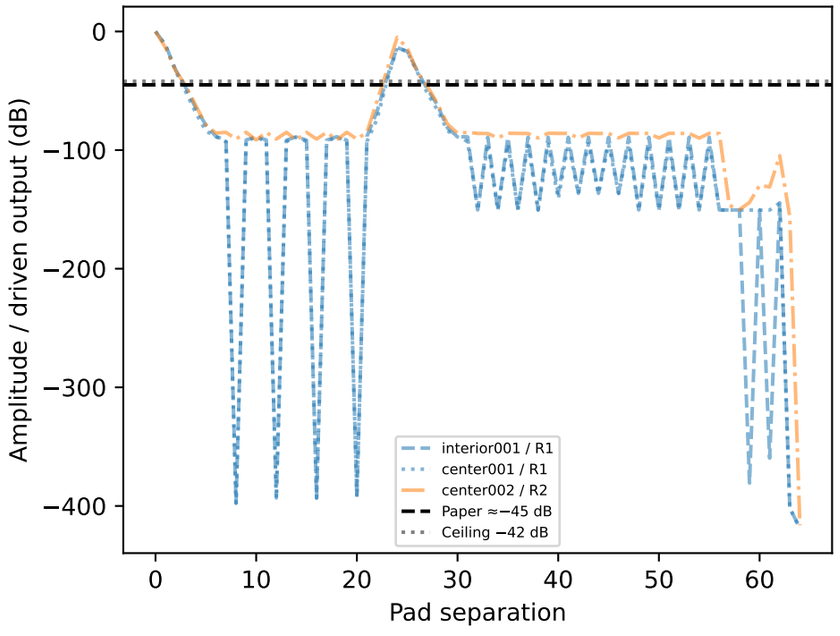

Source direction

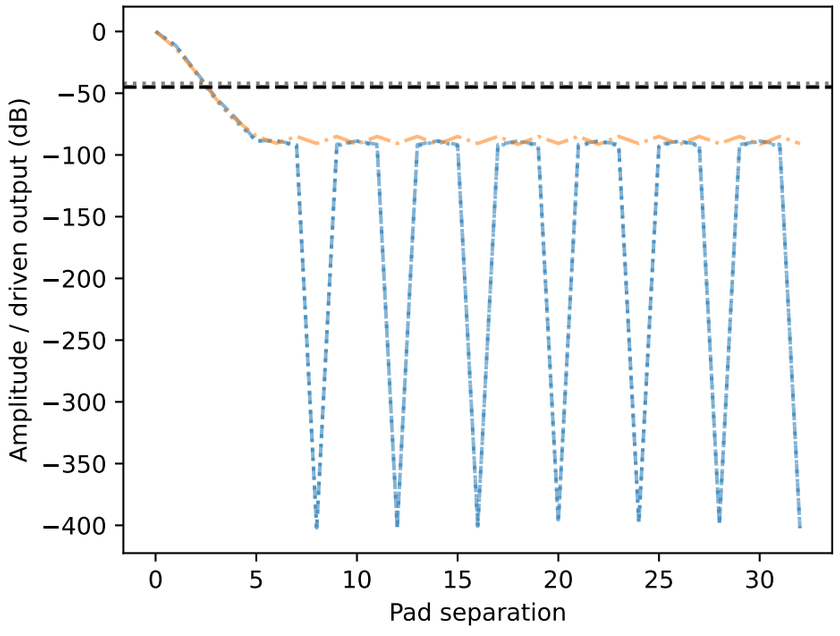

Gate direction

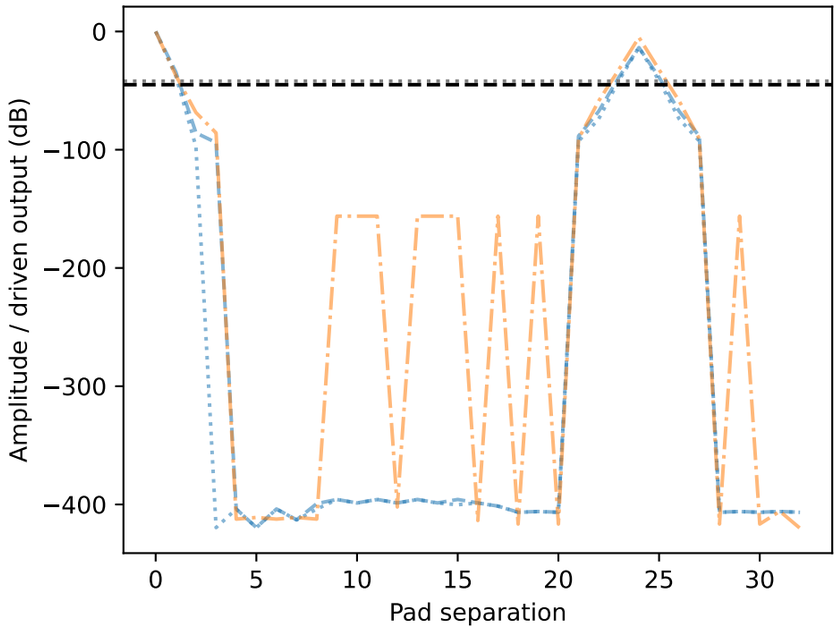

initial001: 36; interior001: 27; center001: 3; center002: 3. Calibration-only adaptive R1 centering and one final R2 centering triplet.
E_area/E_sublinear coincide in dry air; no independent contact-law evidence. Distant maxima: [-13.619, -4.984] dB.
Finite conditional exploration; no global exclusion, device confidence interval or hardware validation.