





Figure 1: Pin connections for the Type-C3.1 connector. The diagram shows a 24-pin connector with pins labeled A1 through A12 and B1 through B12. It details the connections for VBUS, GND, DP+, DP-, and VCONN. A note indicates that the connection for B12 is not shown.

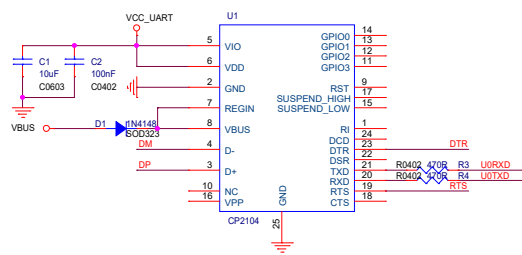

Title <Title>			
Size B	Document Number <Doc>		Rev <Rev/Doc>
Date:	Friday, December 27, 2019	Sheet	1 of 5

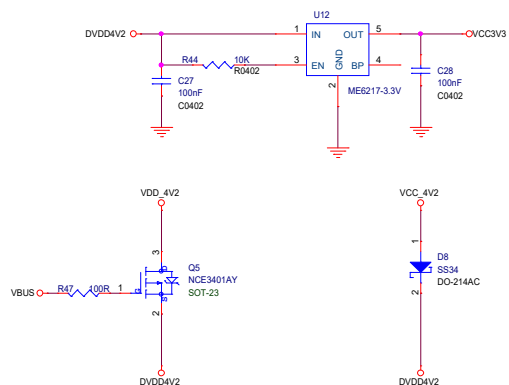


BAT






Title <Title>			
Size B	Document Number <Doc>		Rev <Rev>
Date:	Friday, December 27, 2019	Sheet	1 of 1


ESP32-WROVER

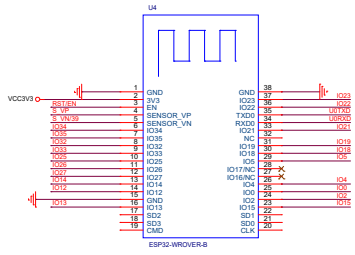


Connector

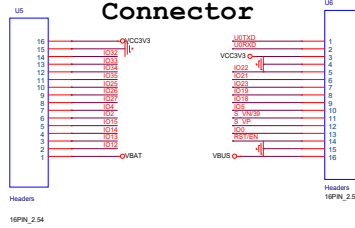


SD CARD

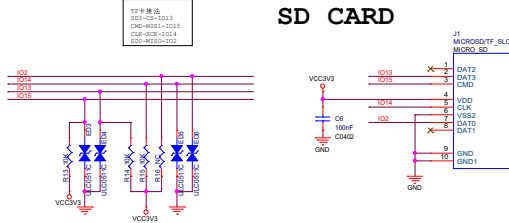


EN BUTTON







LED



VBAT 3V-4.3V



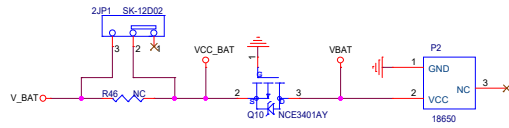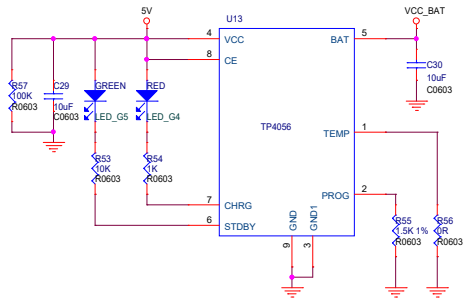

Title		<Title>	
Size	Document Number	Rev	
B	<Doc>	<RevCode>	
Date:	Friday, December 27, 2019	Sheet	5 of 5