Name: Mohammed Ahmed Ali

USN: 1BM18CS135

Experiment 2

Aim:

Configuring IP address to Routers in Packet Tracer. Explore the following messages: Ping Responses, Destination unreachable, Request timed out, Reply

Procedure:

1. Two generic computers are placed alongside a router. They are connected with copper-cross over wires as the devices are on the same level.
2. IP addresses (fast ethernet) and default gateway addresses are configured specifically for each computer.
3. The router's terminal is accessed and an interface for each connection and with the specified gateway addresses the *no shut* command is used to establish a connection.
4. Using the terminals on the computers, we can ping the other computers using their IP Address.

Observation:

After configuring the devices, a connection is established from the router's side using the command line interface. The *show ip route* command shows that the computers are connected. Opening up the terminal on the computer, we can ping another connected computer's IP address to see whether there is a response from the sent packet. The initial attempt will be a time out but on future attempts packets would be successfully retrieved since the computer will be found on the network.

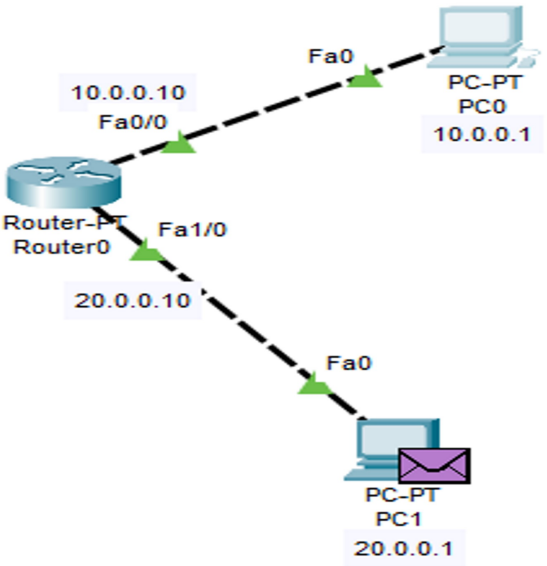

```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 10.0.0.10 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up
exit
Router(config)#interface FastEthernet1/0
Router(config-if)#ip address 20.0.0.10 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0,
changed state to up
exit
Router(config)#

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B -
BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is directly connected, FastEthernet1/0
```

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 20.0.0.1

Pinging 20.0.0.1 with 32 bytes of data:

Request timed out.
Reply from 20.0.0.1: bytes=32 time<1ms TTL=127
Reply from 20.0.0.1: bytes=32 time<1ms TTL=127
Reply from 20.0.0.1: bytes=32 time<1ms TTL=127

Ping statistics for 20.0.0.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 20.0.0.1

Pinging 20.0.0.1 with 32 bytes of data:

Reply from 20.0.0.1: bytes=32 time=4ms TTL=127
Reply from 20.0.0.1: bytes=32 time=4ms TTL=127
Reply from 20.0.0.1: bytes=32 time=4ms TTL=127
Reply from 20.0.0.1: bytes=32 time=4ms TTL=127

Ping statistics for 20.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 4ms, Maximum = 4ms, Average = 4ms
```