

Lab 3

Aim:

Configuring default route to the Router


Procedure:

1. Three routers and two PCs are connected as shown in the topology along with the numbered IP addresses, similar to Lab 2.
2. Pinging PC1 from PC0 at this state gives destination host unreachable.
3. Adding static routes to the routers using `ip route <dest. network> <subnet mask> <next hop>` in the terminal, in enable and configure terminal mode.


Observation:

Pinging PC1 from PC0 and vice versa works as expected. 'show ip route' command shows connected routers.

Topology:

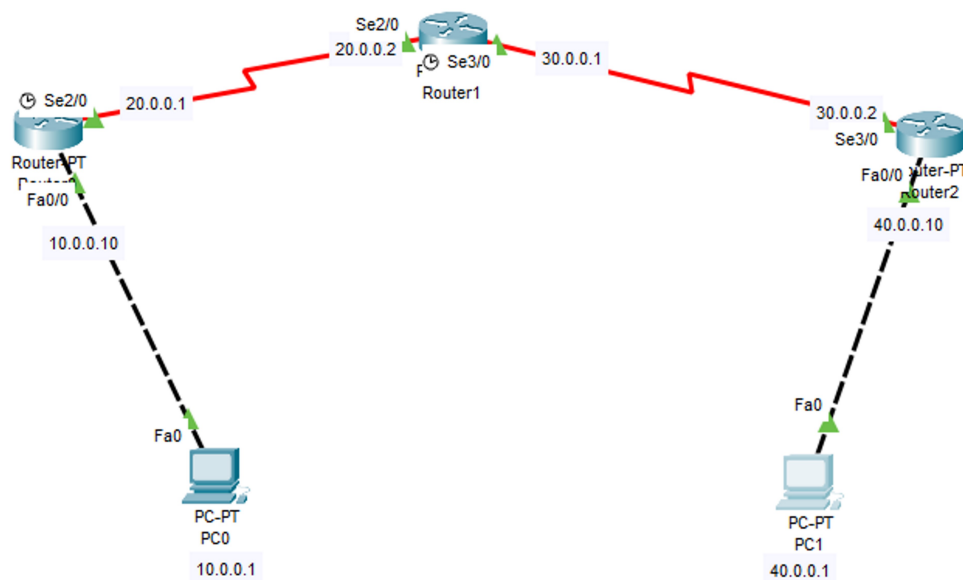

PC0 to Router 1

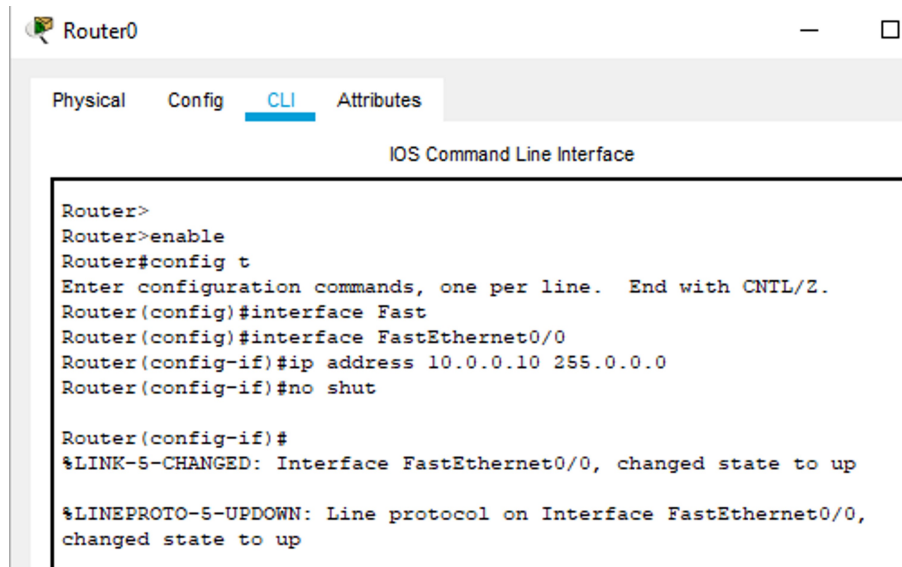

Router0

Physical Config **CLI** Attributes


IOS Command Line Interface

```
Router>
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 10.0.0.10 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up
```

PC1 to Router2

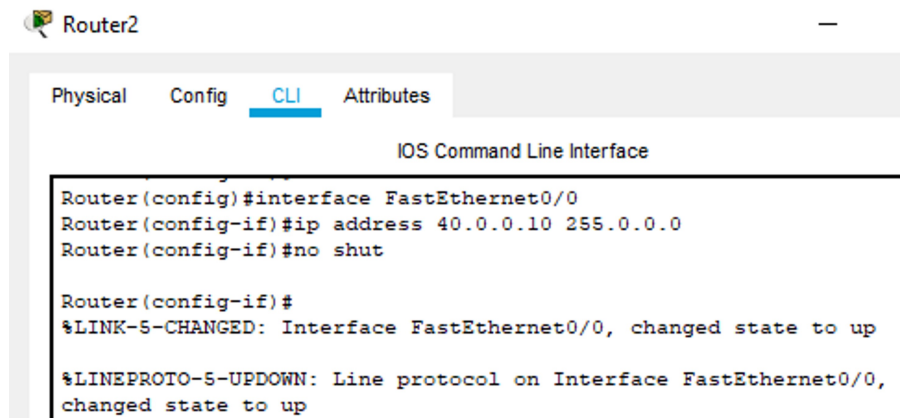

Router2

Physical Config **CLI** Attributes


IOS Command Line Interface

```
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 40.0.0.10 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up
```

Initial Ping - Failure

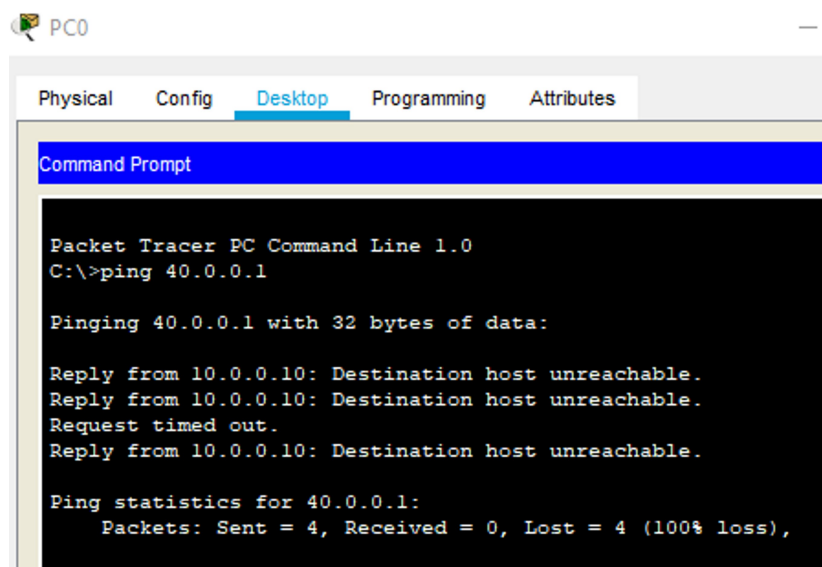

PC0

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Reply from 10.0.0.10: Destination host unreachable.
Reply from 10.0.0.10: Destination host unreachable.
Request timed out.
Reply from 10.0.0.10: Destination host unreachable.

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Router 0

```
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B -
BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is directly connected, Serial2/0
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2
```

Router 1

```
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B -
BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
C    20.0.0.0/8 is directly connected, Serial2/0
C    30.0.0.0/8 is directly connected, Serial3/0
S    40.0.0.0/8 [1/0] via 30.0.0.2
```

Router 2

```
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1


Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B -
BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
C    30.0.0.0/8 is directly connected, Serial3/0
C    40.0.0.0/8 is directly connected, FastEthernet0/0
```

Ping when working as expected

PC0

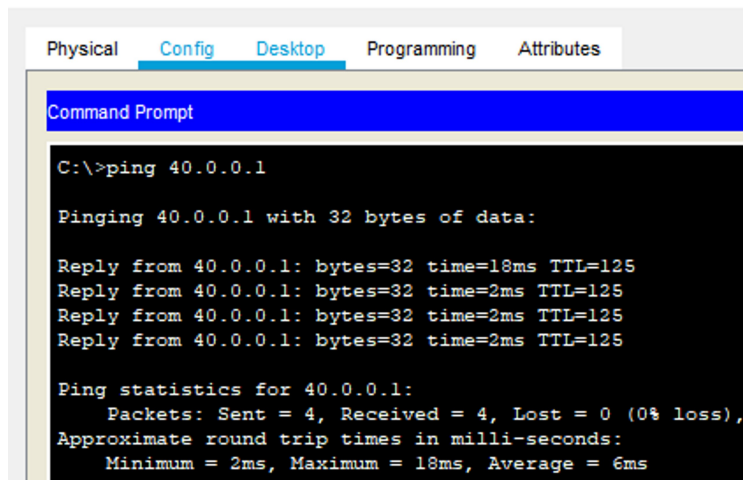

The screenshot shows the Packet Tracer interface for PC0. The 'Desktop' tab is selected, and a Command Prompt window is open. The user has entered the command 'ping 40.0.0.1'. The output shows four successful replies from 40.0.0.1 with varying times (18ms, 2ms, 2ms, 2ms) and a TTL of 125. The statistics indicate 4 packets sent, 4 received, and 0% loss, with an average round trip time of 6ms.


```
C:\>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Reply from 40.0.0.1: bytes=32 time=18ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 18ms, Average = 6ms
```

PC1

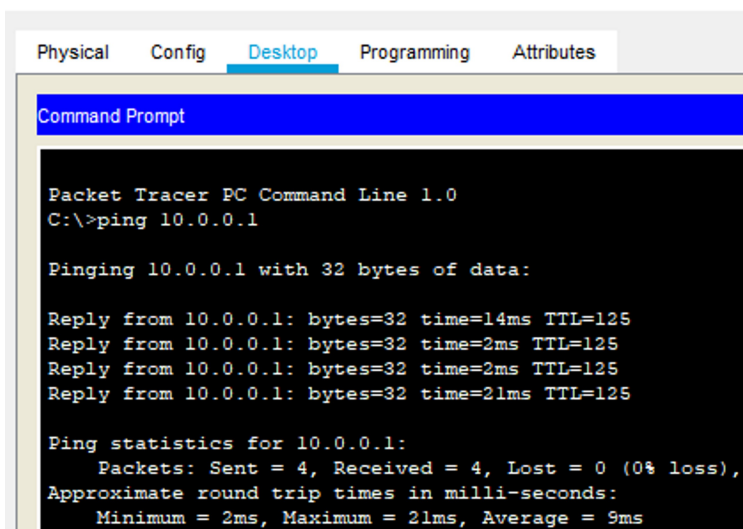

The screenshot shows the Packet Tracer interface for PC1. The 'Desktop' tab is selected, and a Command Prompt window is open. The user has entered the command 'ping 10.0.0.1'. The output shows four successful replies from 10.0.0.1 with varying times (14ms, 2ms, 2ms, 21ms) and a TTL of 125. The statistics indicate 4 packets sent, 4 received, and 0% loss, with an average round trip time of 9ms.

```
Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time=14ms TTL=125
Reply from 10.0.0.1: bytes=32 time=2ms TTL=125
Reply from 10.0.0.1: bytes=32 time=2ms TTL=125
Reply from 10.0.0.1: bytes=32 time=21ms TTL=125

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 21ms, Average = 9ms
```