


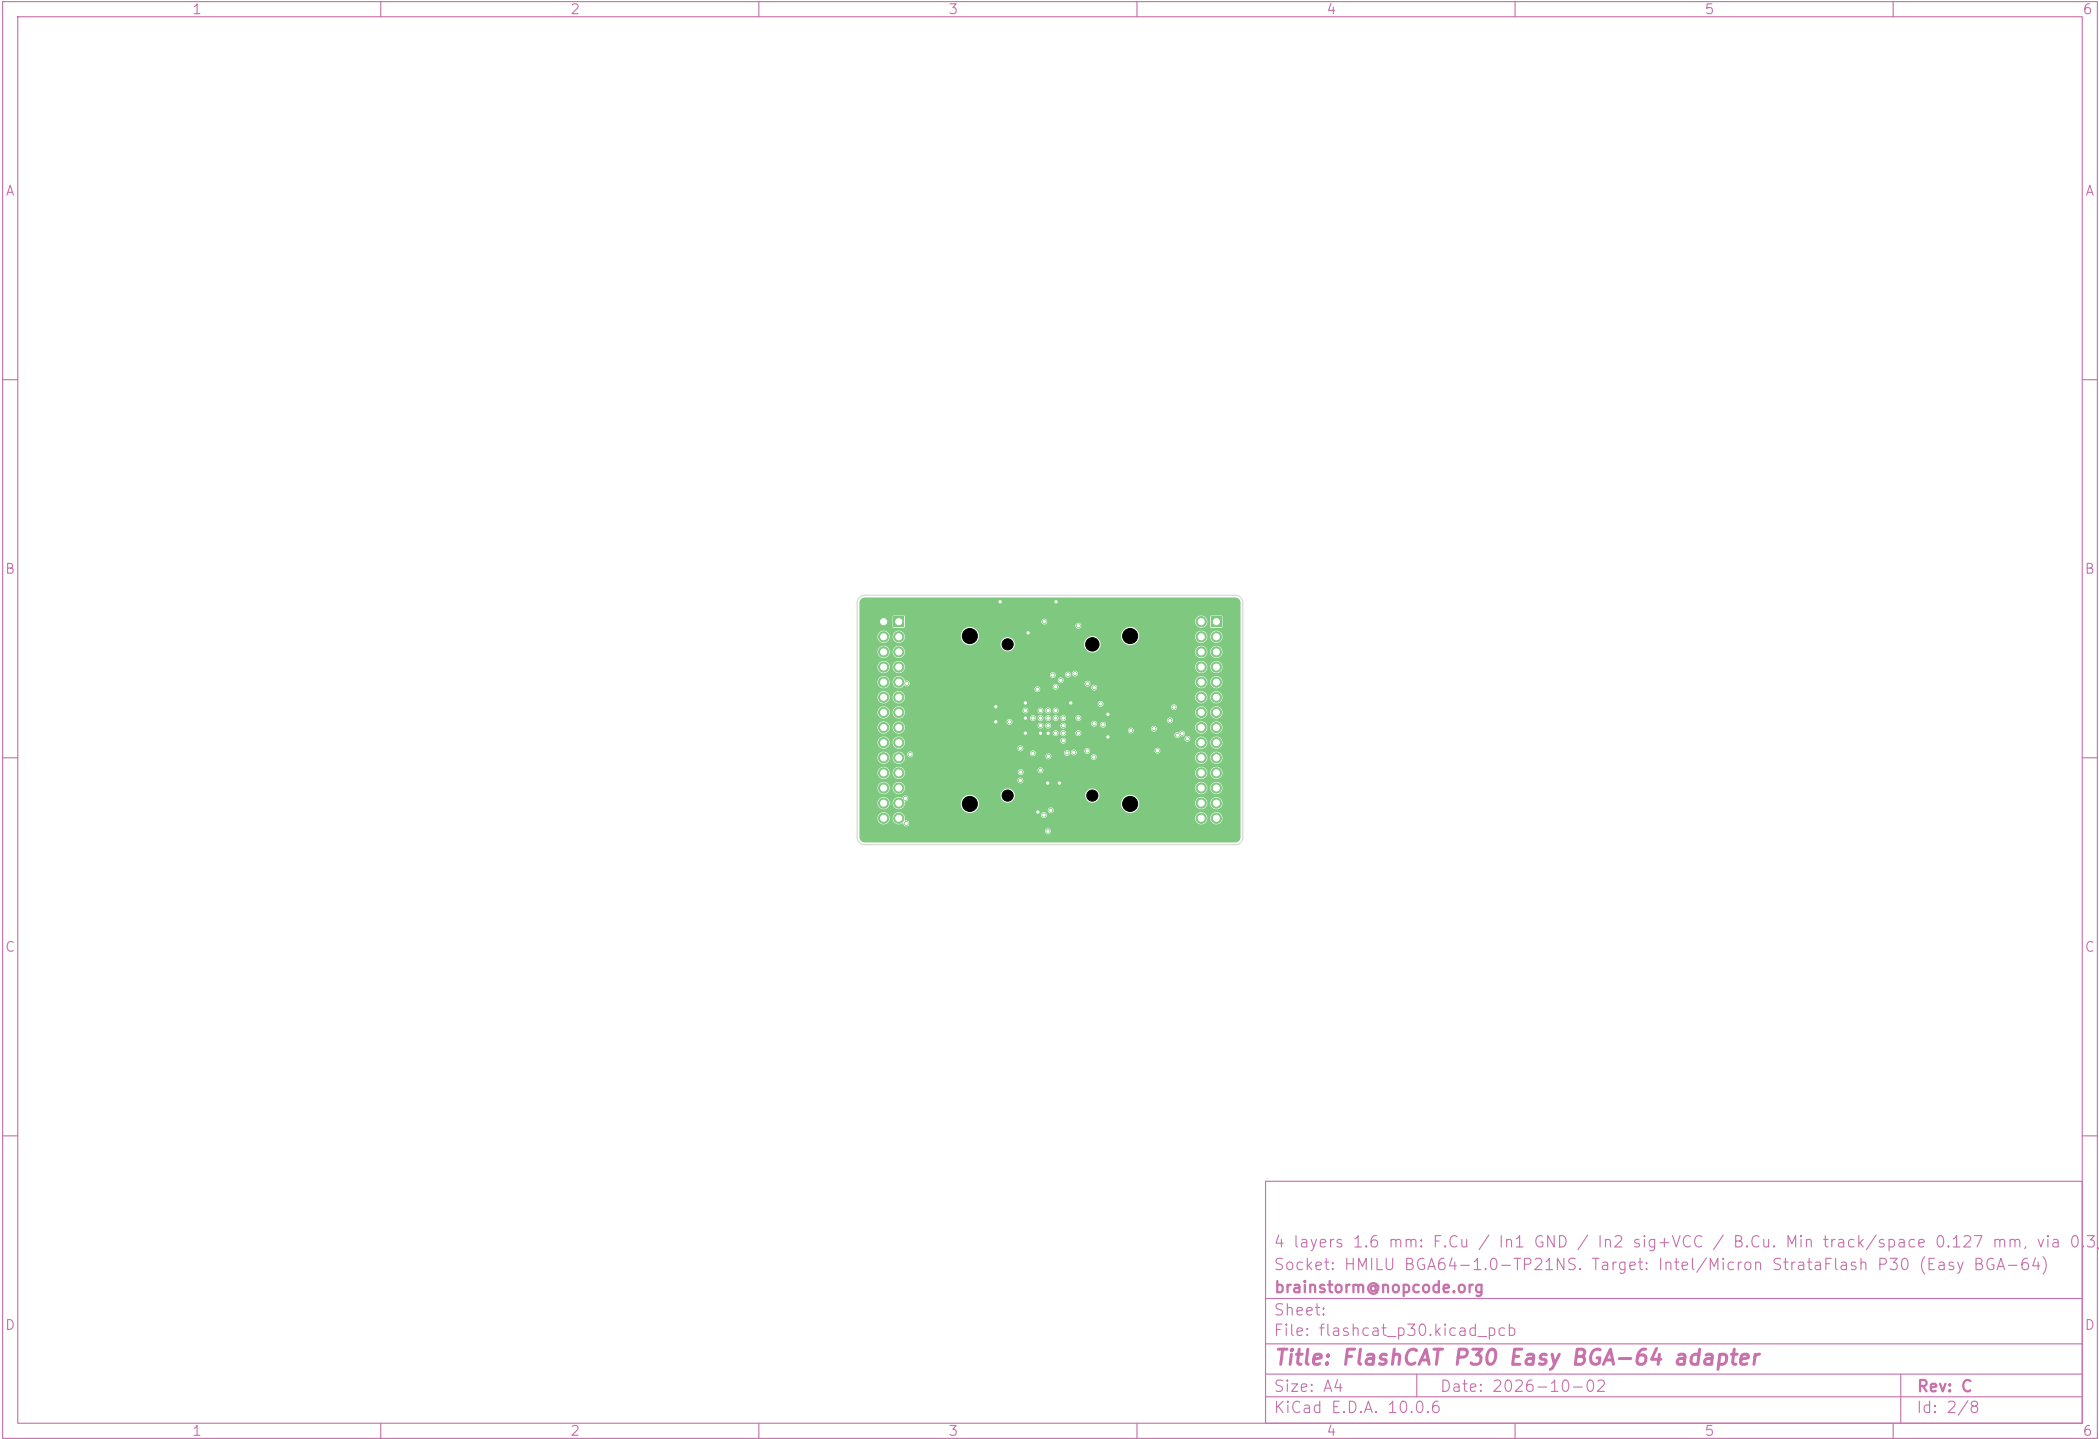

4 layers 1.6 mm: F.Cu / In1 GND / In2 sig+VCC / B.Cu. Min track/space 0.127 mm, via 0.3/0.5, fill 0.5/0.5
Socket: HMILU BGA64-1.0-TP21NS. Target: Intel/Micron StrataFlash P30 (Easy BGA-64)
brainstorm@nopcode.org

Sheet:		
File: flashcat_p30.kicad_pcb		
Title: FlashCAT P30 Easy BGA-64 adapter		
Size: A4	Date: 2026-10-02	Rev: C
KiCad E.D.A. 10.0.6	Id: 2/8	