


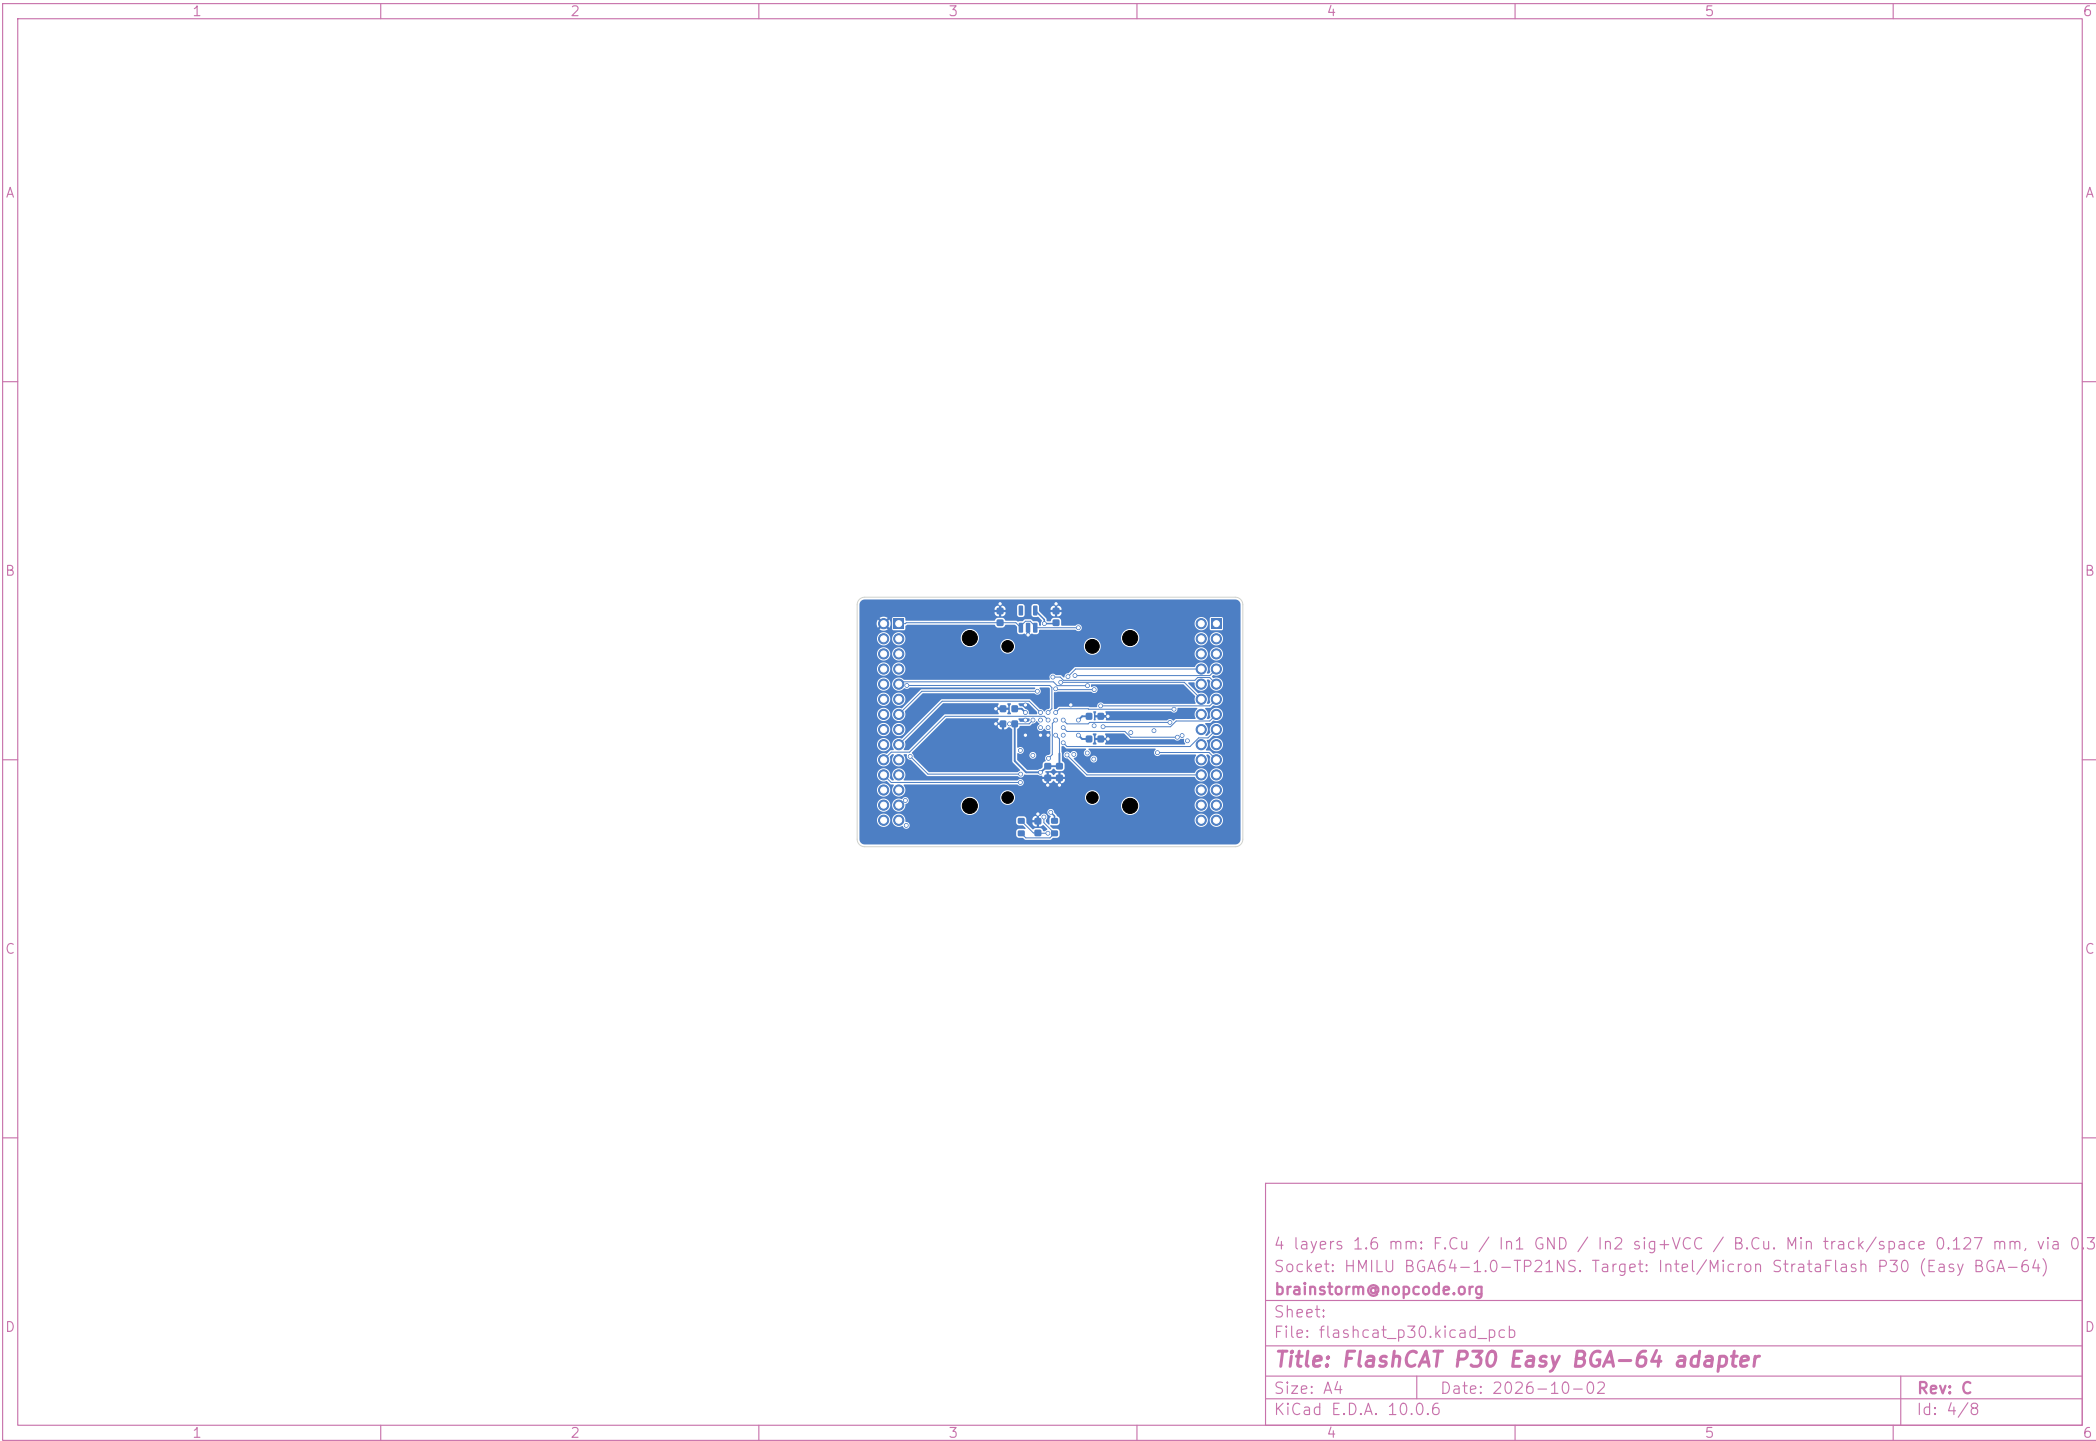

4 layers 1.6 mm: F.Cu / In1 GND / In2 sig+VCC / B.Cu. Min track/space 0.127 mm, via 0.3/0.5, fill

Socket: HMILU BGA64-1.0-TP21NS. Target: Intel/Micron StrataFlash P30 (Easy BGA-64)

brainstorm@nopcode.org

Sheet:

File: flashcat_p30.kicad_pcb

Title: FlashCAT P30 Easy BGA-64 adapter

Size: A4

Date: 2026-10-02

Rev: C

KiCad E.D.A. 10.0.6

Id: 4/8