


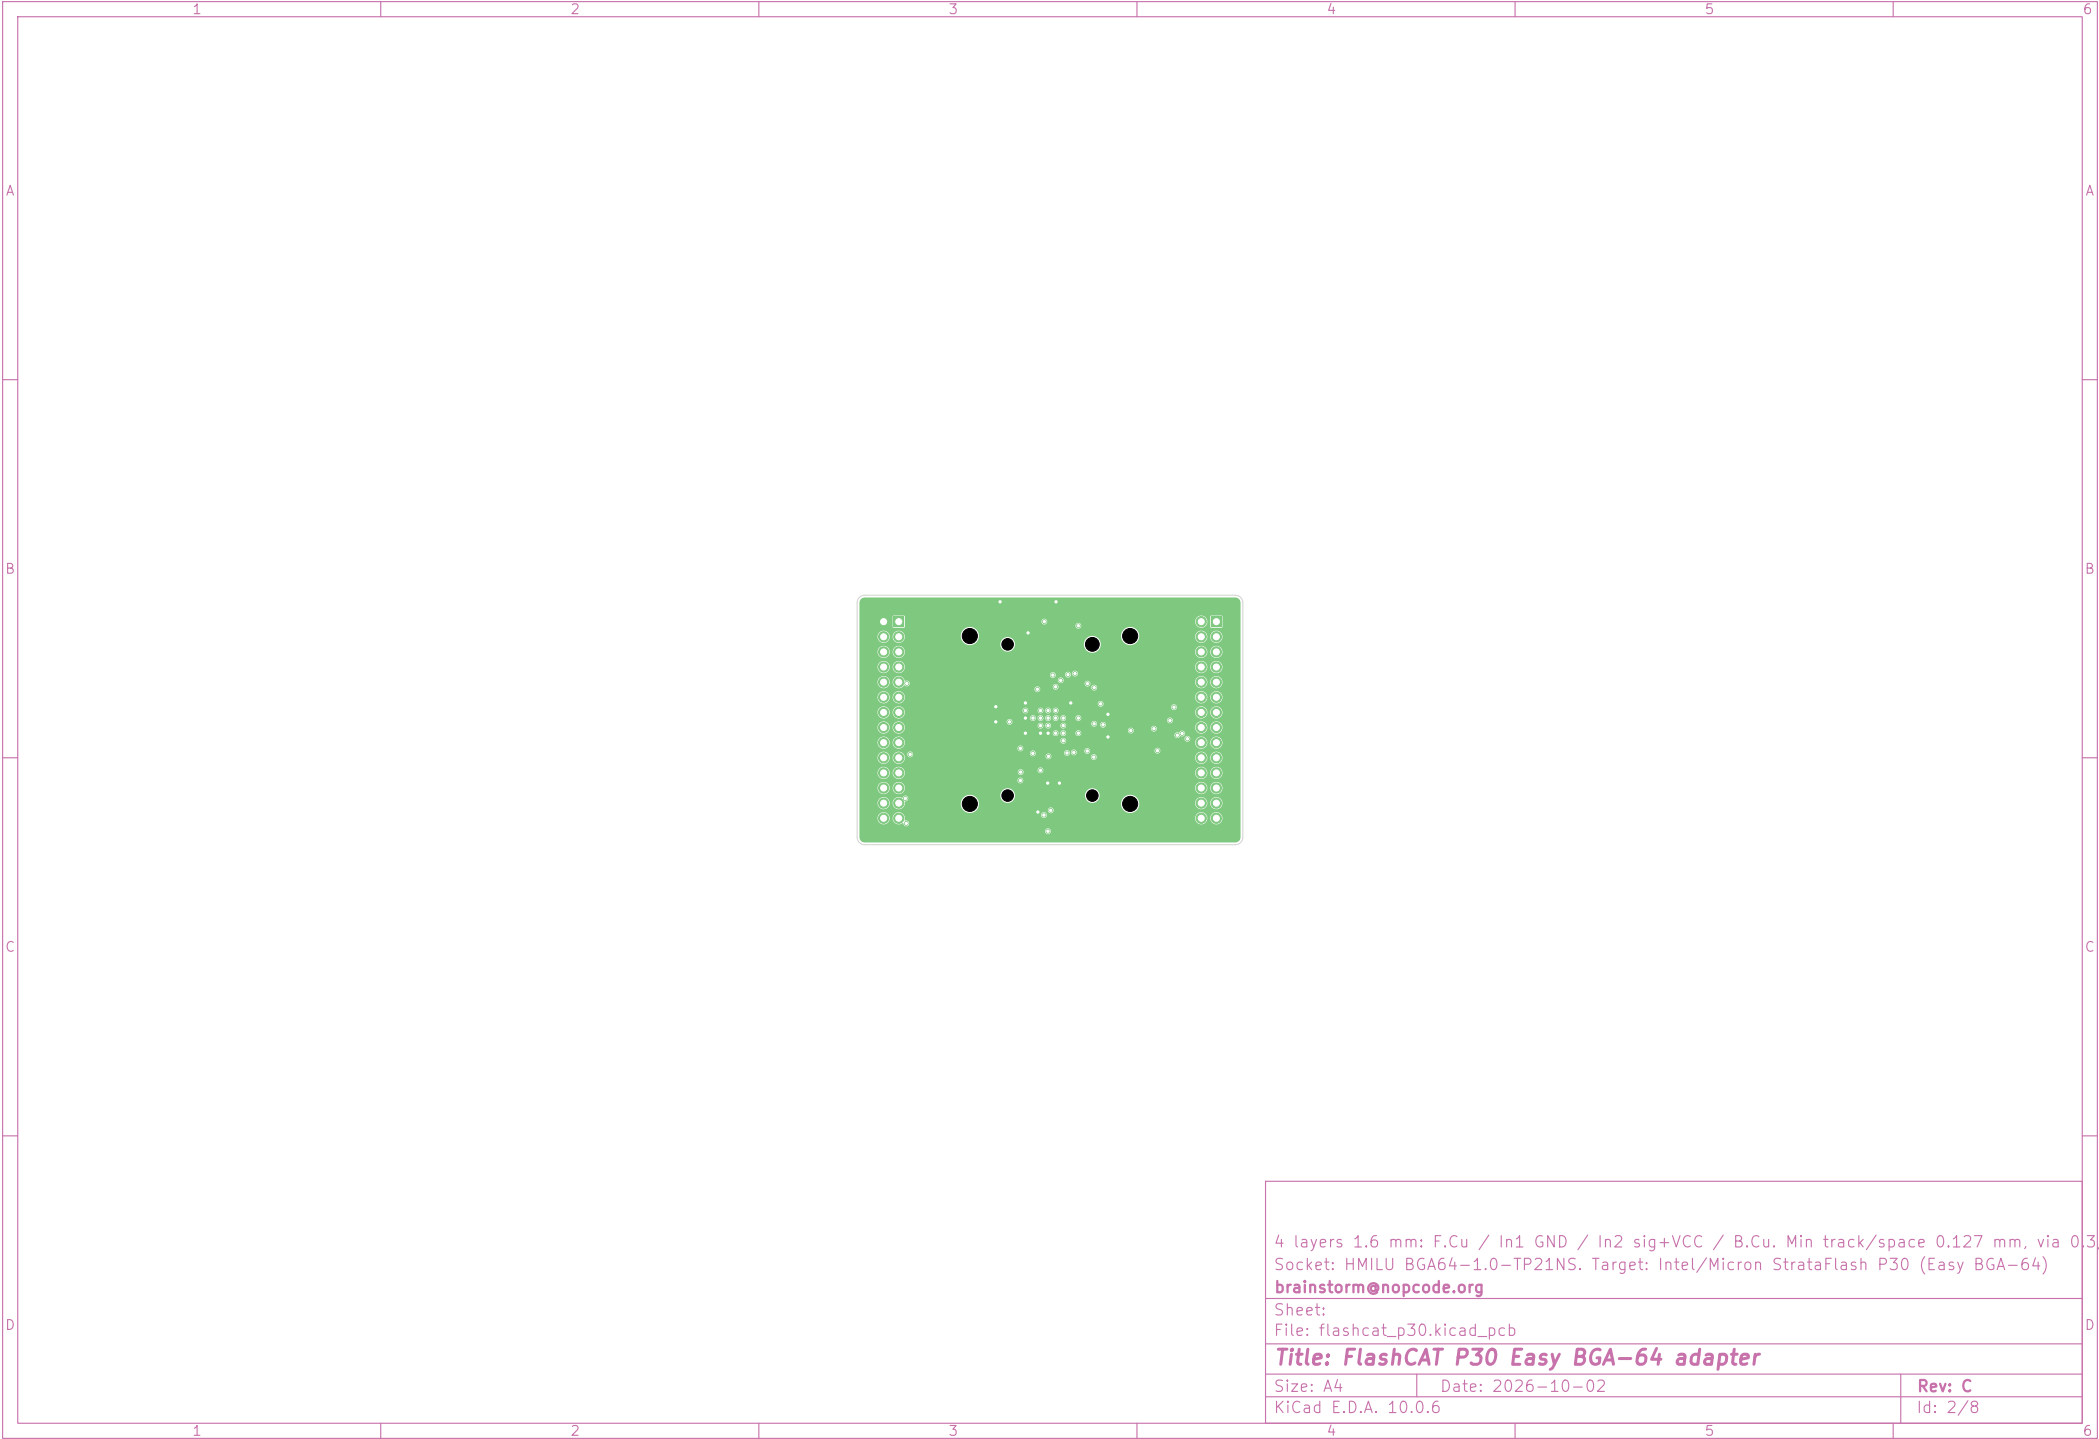

4 layers 1.6 mm: F.Cu / In1 GND / In2 sig+VCC / B.Cu. Min track/space 0.127 mm, via 0.3/0.5, fill  
Socket: HMILU BGA64-1.0-TP21NS. Target: Intel/Micron StrataFlash P30 (Easy BGA-64)  
[brainstorm@nopcode.org](mailto:brainstorm@nopcode.org)

|                                                |                  |         |
|------------------------------------------------|------------------|---------|
| Sheet:                                         |                  |         |
| File: flashcat_p30.kicad_pcb                   |                  |         |
| <b>Title: FlashCAT P30 Easy BGA-64 adapter</b> |                  |         |
| Size: A4                                       | Date: 2026-10-02 | Rev: C  |
| KiCad E.D.A. 10.0.6                            |                  | Id: 2/8 |