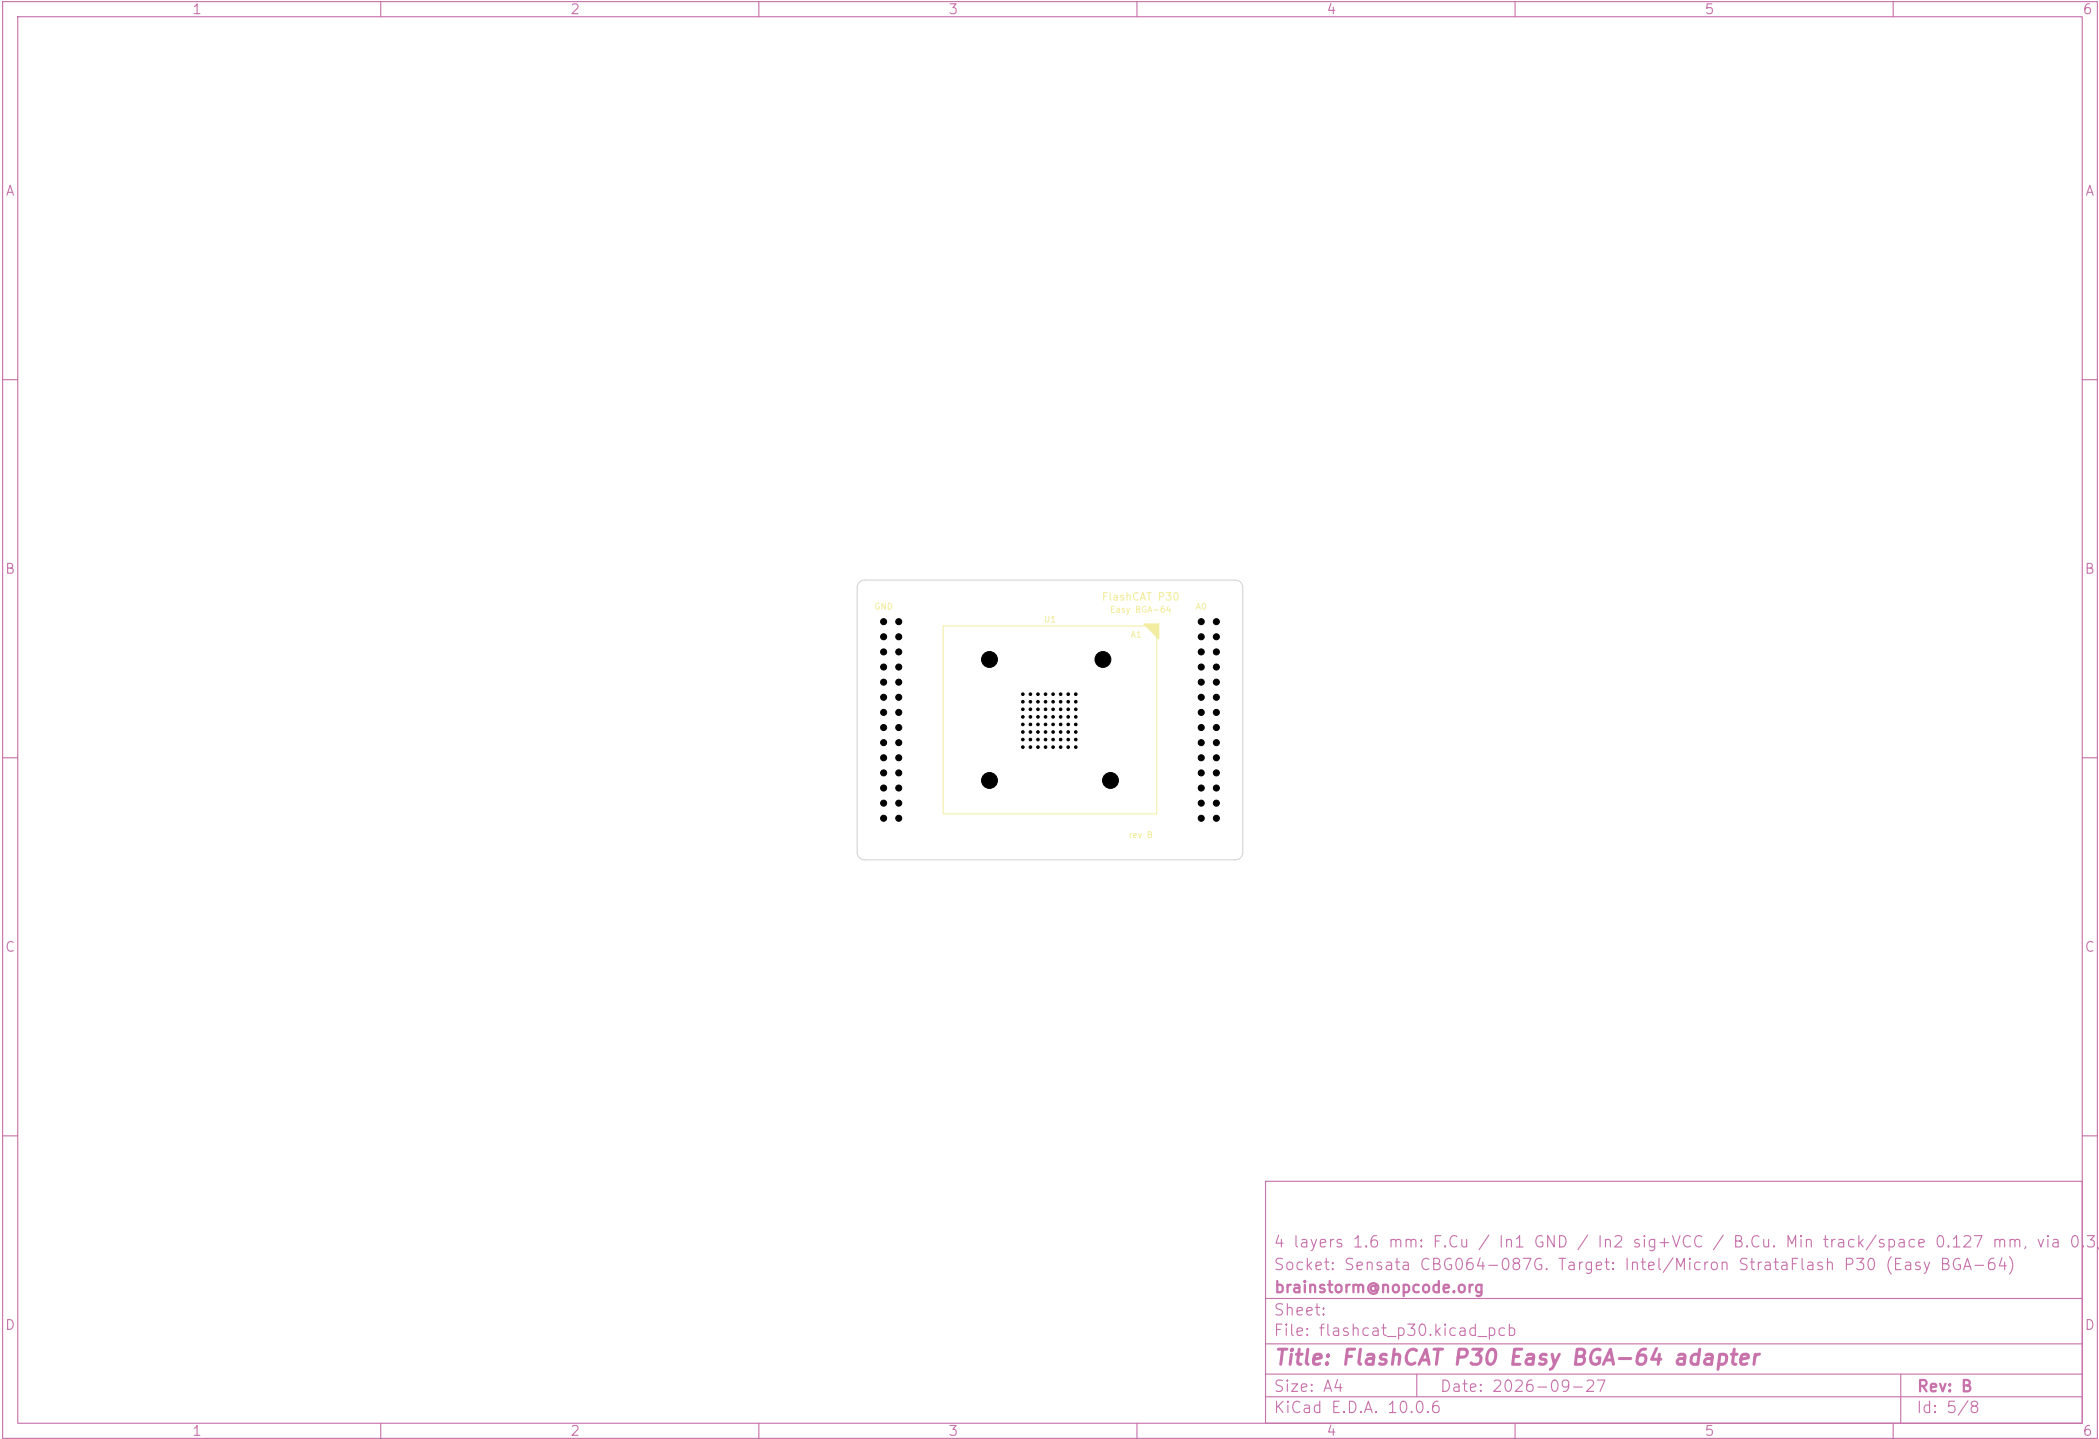


4 layers 1.6 mm: F.Cu / In1 GND / In2 sig+VCC / B.Cu. Min track/space 0.127 mm, via 0.3/0.5		
Socket: Sensata CBG064-087G. Target: Intel/Micron StrataFlash P30 (Easy BGA-64)		
brainstorm@nopcode.org		
Sheet:		
File: flashcat_p30.kicad_pcb		
Title: FlashCAT P30 Easy BGA-64 adapter		
Size: A4	Date: 2026-09-27	Rev: B
KiCad E.D.A. 10.0.6		Id: 5/8