BL Galaxy Electrical

Silicon Epitaxial Planar Transistor


2SC1623

FEATURES

High DC current gain:h_{FE}=200TYP
(V_{CE}=6.0V,I_C=1.0mA)



● High Voltage:V_{CEO}=50V



APPLICATIONS

- NPN Silicon Epitaxial Planar Transistor
- Audio frequency general purpose amplifier.

ORDERING INFORMATION

Type No.	Marking	Package Code	
2SC1623	L4/L5/L6/L7	SOT-23	

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
V _{CBO}	Collector-Base Voltage	60	V
V _{CEO}	Collector-Emitter Voltage	50	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current -Continuous	100	mA
Pc	Collector Dissipation	200	mW
T_{j},T_{stg}	Junction and Storage Temperature	-55~150	${\mathbb C}$

Document number: BL/SSSTC0018

Rev.A



Silicon Epitaxial Planar Transistor

2SC1623

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =100µA,I _E =0	60			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =1mA,I _B =0	50			٧
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =100μA,I _C =0	5			V
Collector cut-off current	I _{CBO}	V _{CB} =60V,I _E =0			0.1	μA
Emitter cut-off current	I _{EBO}	V _{EB} =5V,I _C =0			0.1	μA
DC current gain	h _{FE}	V _{CE} =6V,I _C =1mA	90	200	600	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =100mA, I _B =10mA		0.15	0.3	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =100mA, I _B =10mA		0.86	1.0	V
Transition frequency	f _T	V _{CE} =6V, I _E = 10mA		250		MHz
Output capacitance	C _{ob}	V _{CB} =6V, I _E = 0,f=1.0MHz		3.0		MHz

CLASSIFICATION OF $h_{FE(1)}$

Rank	L4	L5	L6	L7
Range	90-180	135-270	200-400	300-600
Marking	L4	L5	L6	L7


Document number: BL/SSSTC0018


www.galaxycn.com


Silicon Epitaxial Planar Transistor


2SC1623


TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

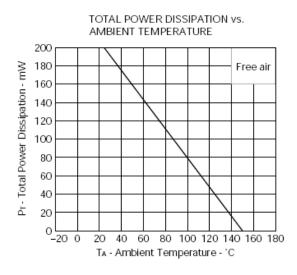


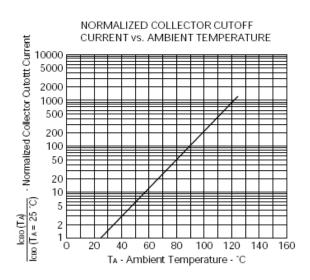

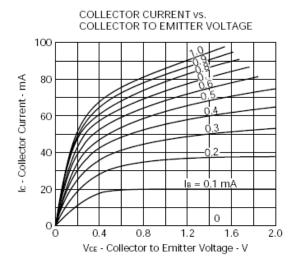

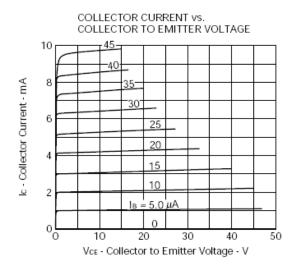

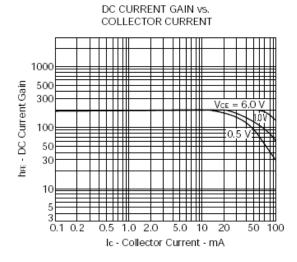

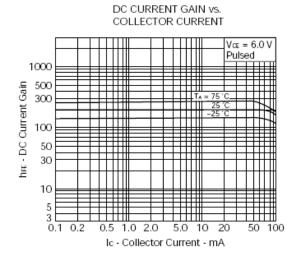


Silicon Epitaxial Planar Transistor

2SC1623


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

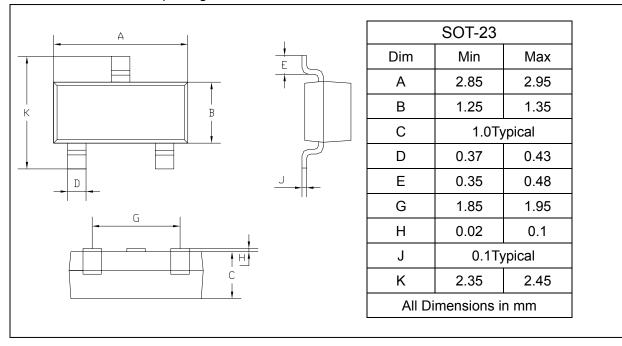

SOLDERING FOOTPRINT

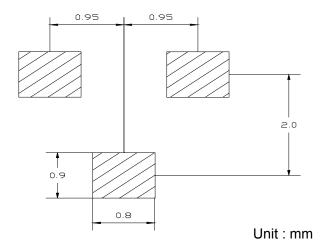

PACKAGE INFORMATION

Device	Package	Shipping
2SC1623	SOT-23	3000/Tape&Reel

www.s-manuals.com