


ANEXO IV

PRUEBAS Y VERIFICACIÓN: RESULTADOS DE LAS PRUEBAS (1.5.2)



	ADMINISTRACIÓN	REUNIONES	TÉCNICA	INVITADOS	DMZ	IMPESC	OPENVPN
ADMINISTRACIÓN							
REUNIONES							
TÉCNICA							
INVITADOS							
DMZ							
IMPESC							
OPENVPN							

ADMINISTRACIÓN

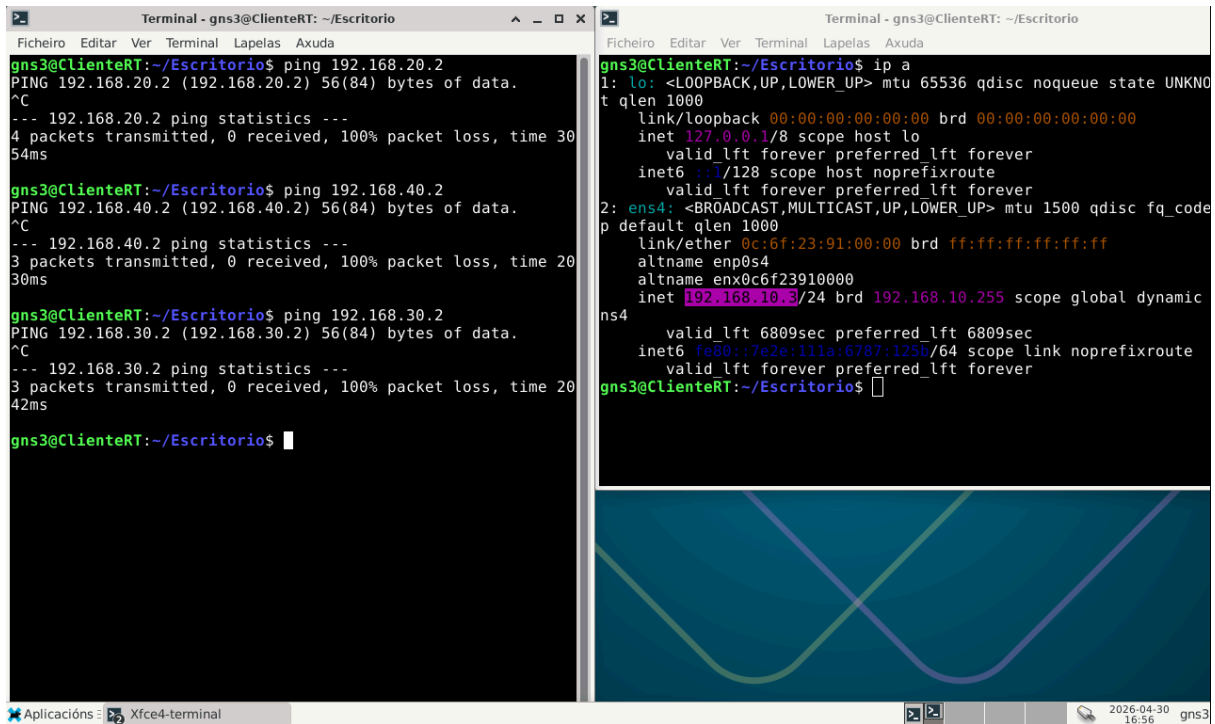

The image shows two terminal windows from the XFCE4-terminal application. The left window displays a series of ping tests from a host named gns3@ClienteRT. The tests are performed against three different IP addresses: 192.168.20.2, 192.168.40.2, and 192.168.30.2. Each test shows a 100% packet loss and a time of 30ms. The right window shows the output of the 'ip a' command, displaying the network configuration for the interface 'ens4'. The configuration includes a link/ether address of 0c:6f:23:91:00:00, a valid lifetime of 6809sec, and a preferred lifetime of 6809sec. The interface is configured with a static IP address of 192.168.10.3/24 and a broadcast address of 192.168.10.255. The background of the terminal windows features a blue and green geometric pattern.

```


Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
^C
--- 192.168.20.2 ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 30
54ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 20
30ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 20
42ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKN
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_code
p default qlen 1000
    link/ether 0c:6f:23:91:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0c6f23910000
    inet 192.168.10.3/24 brd 192.168.10.255 scope global dynamic
ns4
    valid_lft 6809sec preferred_lft 6809sec
    inet6 fe80::7e2e:111a:6787:125b/64 scope link noprefixroute
    valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```

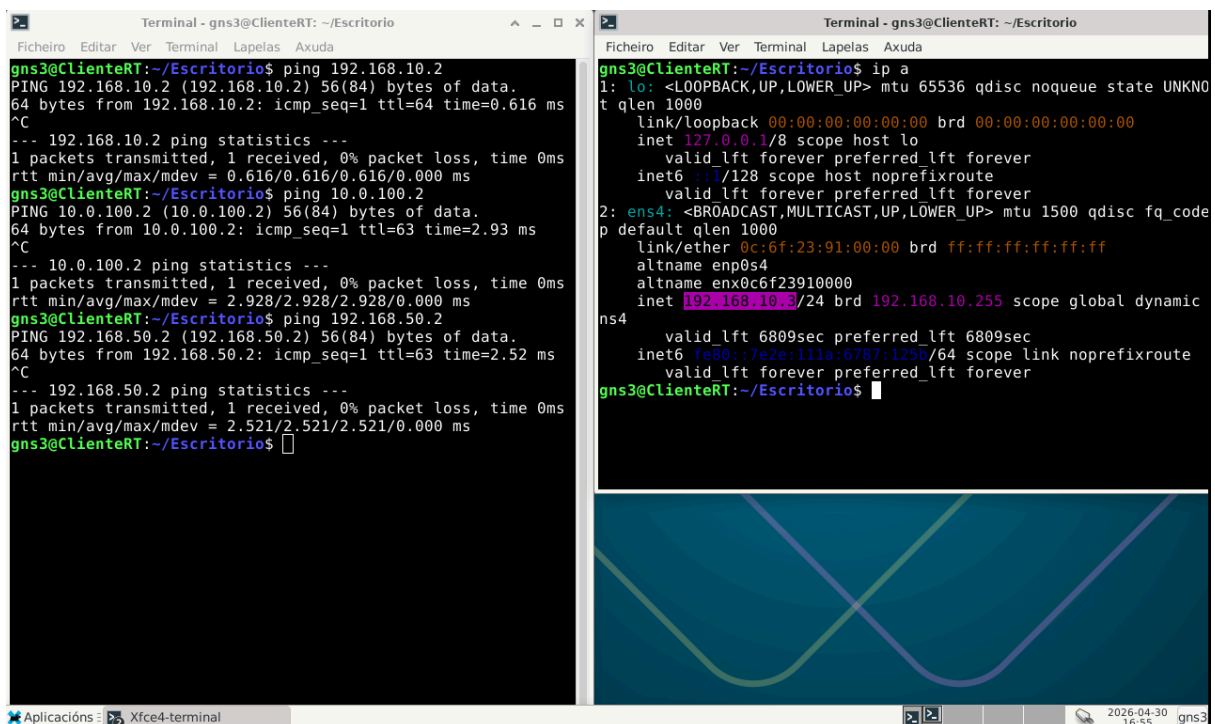


The image shows two terminal windows from the XFCE4-terminal application. The left window displays a series of ping tests from a host named gns3@ClienteRT. The tests are performed against three different IP addresses: 192.168.10.2, 10.0.100.2, and 192.168.50.2. Each test shows a 0% packet loss and a time of 0ms. The right window shows the output of the 'ip a' command, displaying the network configuration for the interface 'ens4'. The configuration includes a link/ether address of 0c:6f:23:91:00:00, a valid lifetime of 6809sec, and a preferred lifetime of 6809sec. The interface is configured with a static IP address of 192.168.10.3/24 and a broadcast address of 192.168.10.255. The background of the terminal windows features a blue and green geometric pattern.

```

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
64 bytes from 192.168.10.2: icmp_seq=1 ttl=64 time=0.616 ms
^C
--- 192.168.10.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 0.616/0.616/0.616/0.000 ms
gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=2.93 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.928/2.928/2.928/0.000 ms
gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=2.52 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.521/2.521/2.521/0.000 ms
gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKN
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_code
p default qlen 1000
    link/ether 0c:6f:23:91:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0c6f23910000
    inet 192.168.10.3/24 brd 192.168.10.255 scope global dynamic
ns4
    valid_lft 6809sec preferred_lft 6809sec
    inet6 fe80::7e2e:111a:6787:125b/64 scope link noprefixroute
    valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```

REUNIONES

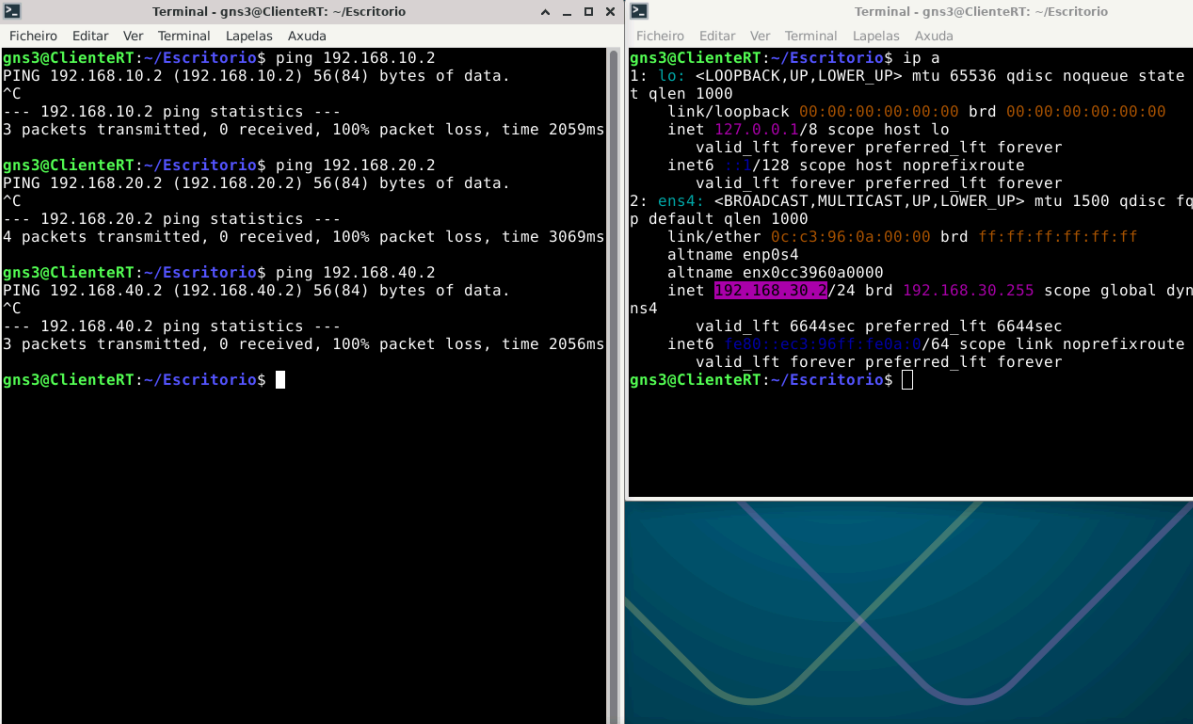

The image shows two terminal windows from the XFCE4-terminal application. The left window shows a series of ping tests from gns3@ClienteRT to 192.168.10.2, 192.168.20.2, and 192.168.40.2, all showing 100% packet loss. The right window shows the output of the 'ip a' command, displaying network interfaces lo, ens4, and ens5 with their respective IP addresses and configurations. The system clock at the bottom right indicates 2026-04-30 16:59.

```


Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 2059ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
^C
--- 192.168.20.2 ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 3069ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 2056ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq
   p default qlen 1000
   link/ether 0c:c3:96:0a:00:00 brd ff:ff:ff:ff:ff:ff
   altnam enp0s4
   altnam enx0cc3960a0000
   inet 192.168.30.2/24 brd 192.168.30.255 scope global dyna
   ns4
       valid_lft 6644sec preferred_lft 6644sec
   inet6 fe80::ec3:96ff:fe0a:0/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```

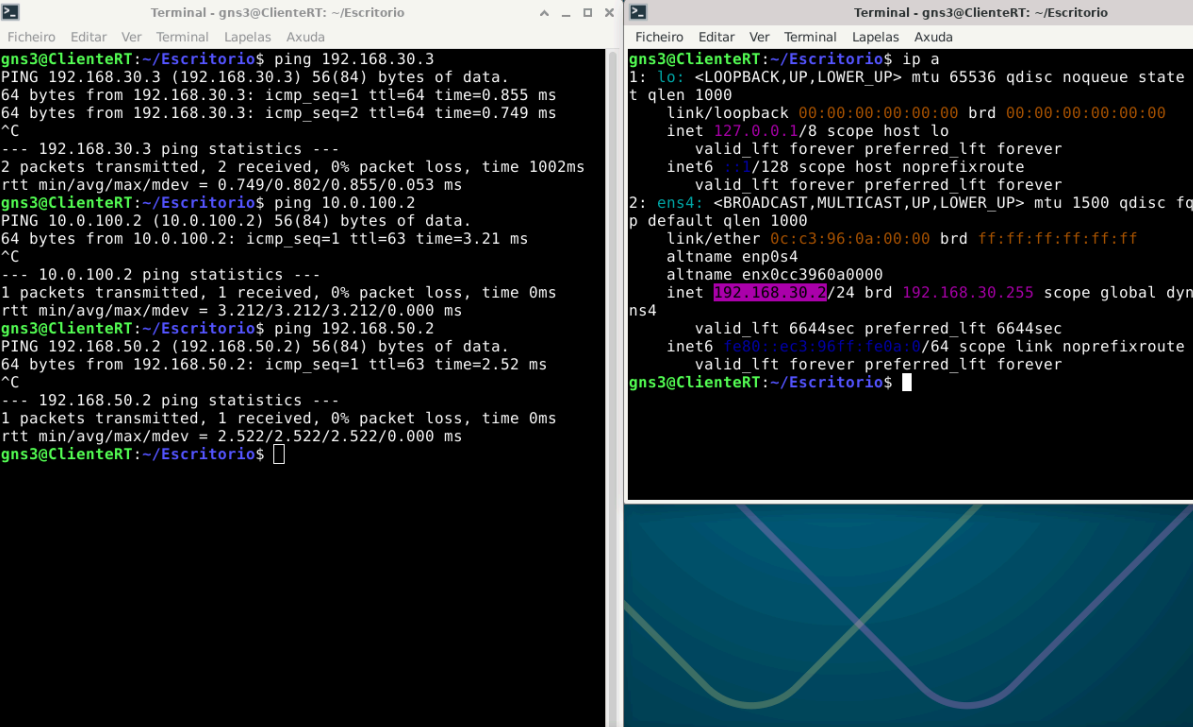

The image shows two terminal windows from the XFCE4-terminal application. The left window shows ping tests from gns3@ClienteRT to 192.168.30.3, 10.0.100.2, and 192.168.50.2, all showing 0% packet loss. The right window shows the output of the 'ip a' command, displaying network interfaces lo, ens4, and ens5 with their respective IP addresses and configurations. The system clock at the bottom right indicates 2026-04-30 16:59.

```

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.30.3
PING 192.168.30.3 (192.168.30.3) 56(84) bytes of data.
64 bytes from 192.168.30.3: icmp_seq=1 ttl=64 time=0.855 ms
64 bytes from 192.168.30.3: icmp_seq=2 ttl=64 time=0.749 ms
^C
--- 192.168.30.3 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1002ms
rtt min/avg/max/mdev = 0.749/0.802/0.855/0.053 ms


gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=3.21 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 3.212/3.212/3.212/0.000 ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=2.52 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.522/2.522/2.522/0.000 ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq
   p default qlen 1000
   link/ether 0c:c3:96:0a:00:00 brd ff:ff:ff:ff:ff:ff
   altnam enp0s4
   altnam enx0cc3960a0000
   inet 192.168.30.2/24 brd 192.168.30.255 scope global dyna
   ns4
       valid_lft 6644sec preferred_lft 6644sec
   inet6 fe80::ec3:96ff:fe0a:0/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```

TÉCNICA

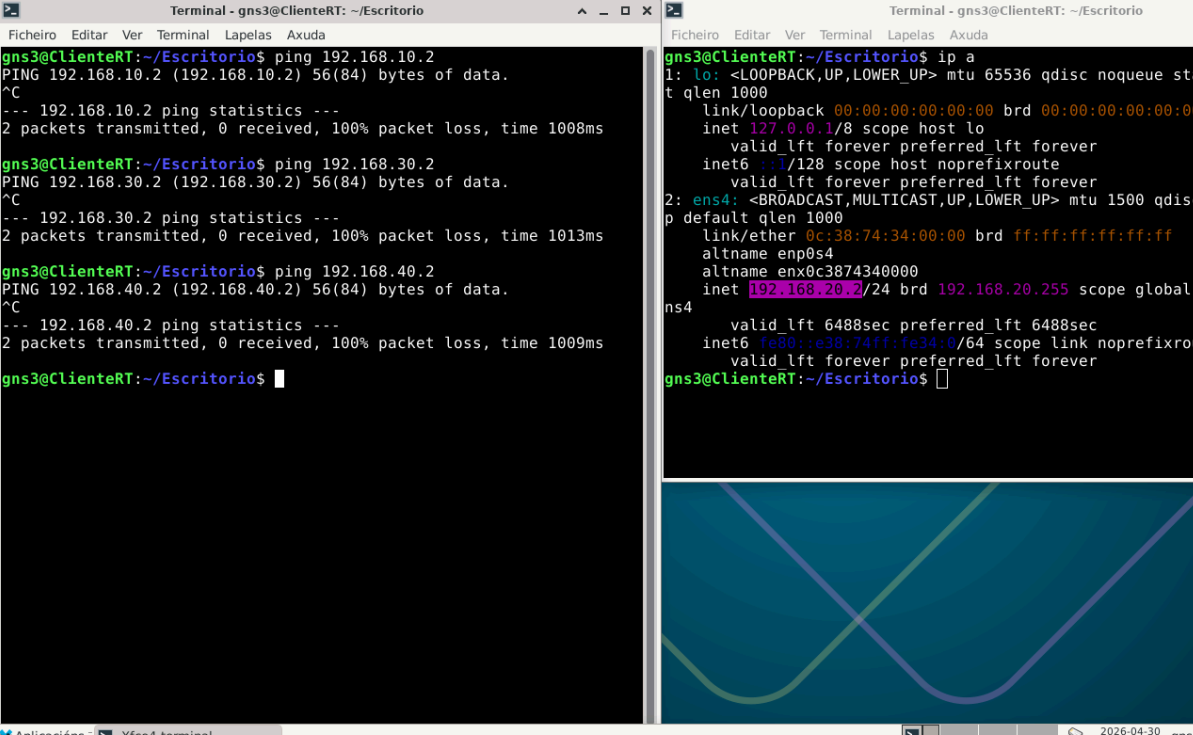

The image shows two terminal windows side-by-side. The left window displays a series of ping commands and their results. The right window displays the output of the 'ip a' command, showing network interface details.

```


Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1008ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1013ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1009ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc
    p default qlen 1000
    link/ether 0c:38:74:34:00:00 brd ff:ff:ff:ff:ff:ff
    altnam enp0s4
    altnam enx0c3874340000
    inet 192.168.20.2/24 brd 192.168.20.255 scope global
    ns4
        valid_lft 6488sec preferred_lft 6488sec
    inet6 fe80::e38:74ff:fe34::/64 scope link noprefixrou
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```

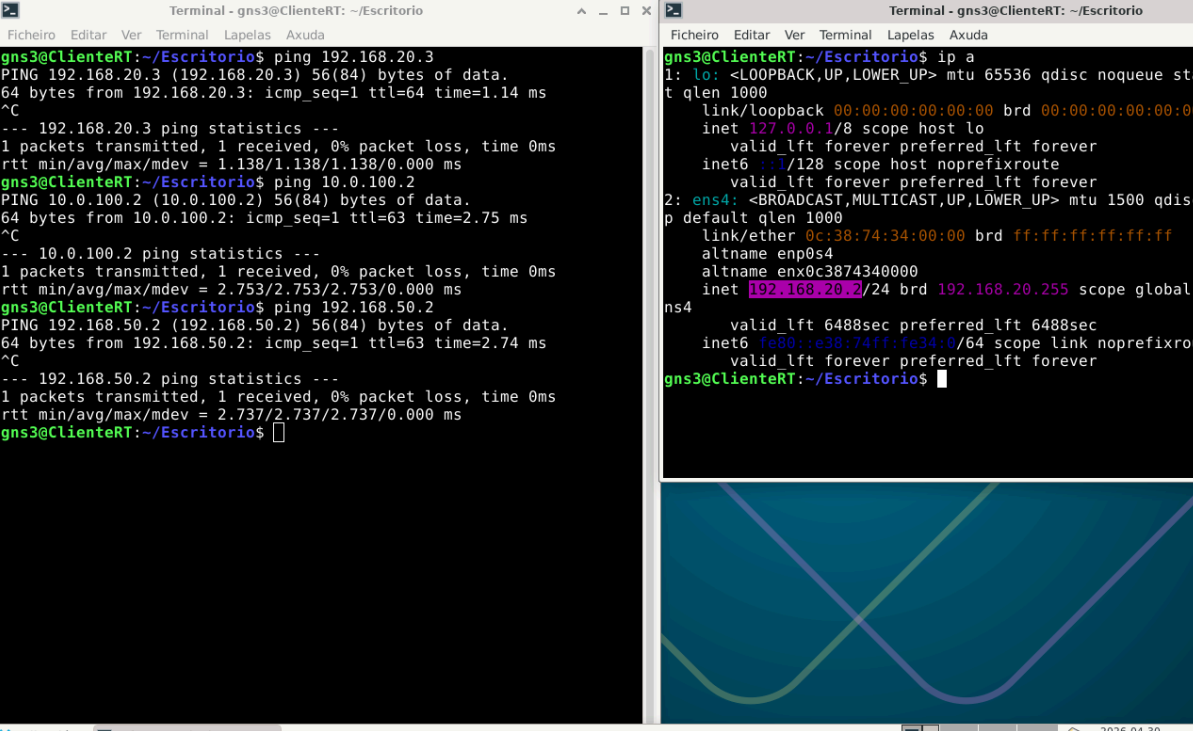

The image shows two terminal windows side-by-side. The left window displays a series of ping commands and their results. The right window displays the output of the 'ip a' command, showing network interface details.

```

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.20.3
PING 192.168.20.3 (192.168.20.3) 56(84) bytes of data.
64 bytes from 192.168.20.3: icmp_seq=1 ttl=64 time=1.14 ms
^C
--- 192.168.20.3 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 1.138/1.138/1.138/0.000 ms


gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=2.75 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.753/2.753/2.753/0.000 ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=2.74 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.737/2.737/2.737/0.000 ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc
    p default qlen 1000
    link/ether 0c:38:74:34:00:00 brd ff:ff:ff:ff:ff:ff
    altnam enp0s4
    altnam enx0c3874340000
    inet 192.168.20.2/24 brd 192.168.20.255 scope global
    ns4
        valid_lft 6488sec preferred_lft 6488sec
    inet6 fe80::e38:74ff:fe34::/64 scope link noprefixrou
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```

INVITADOS

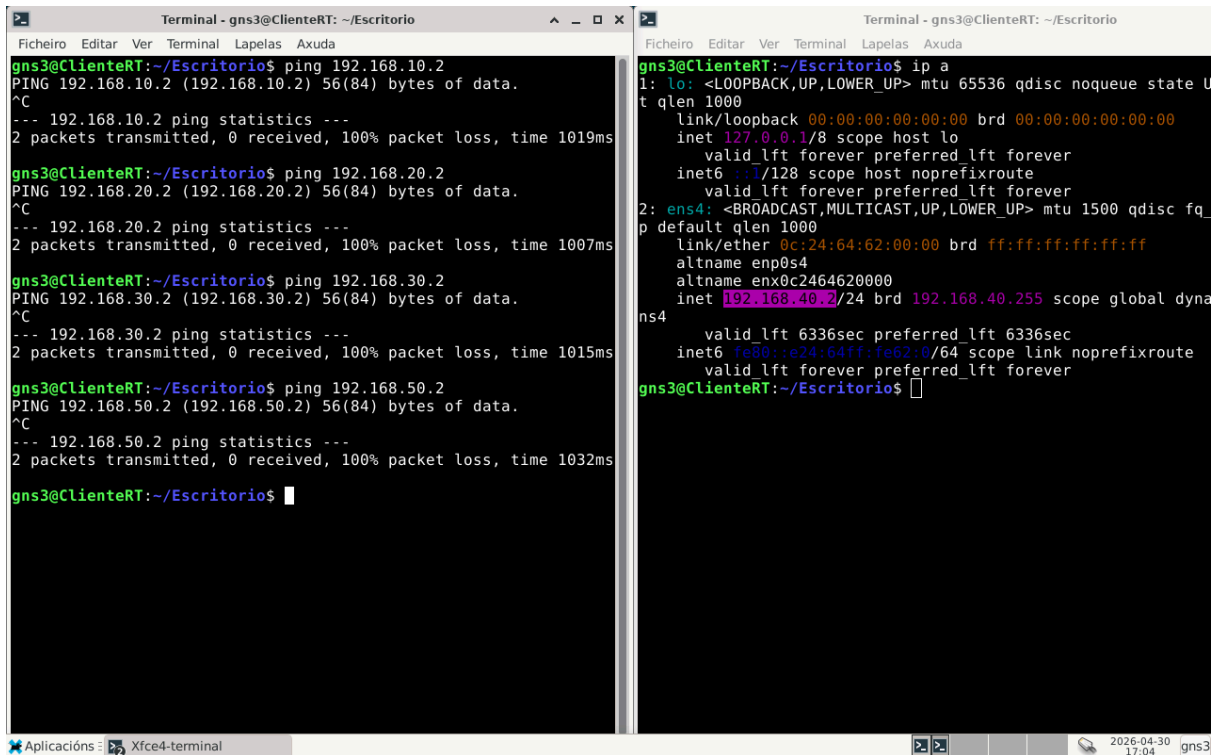

The image shows two terminal windows side-by-side. The left window shows a series of ping tests from gns3@ClienteRT to various IP addresses (192.168.10.2, 192.168.20.2, 192.168.30.2, 192.168.50.2). All pings fail with 100% packet loss. The right window shows the output of the 'ip a' command, displaying network interface details for 'lo' and 'ens4'.

```

Terminal - gns3@ClienteRT: ~/Escritorio
gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1019ms


gns3@ClienteRT:~/Escritorio$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
^C
--- 192.168.20.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1007ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1015ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
^C
--- 192.168.50.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1032ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_
    link/ether 0c:24:64:62:00:00 brd ff:ff:ff:ff:ff:ff
    altname enx0c2464620000
    inet 192.168.40.2/24 brd 192.168.40.255 scope global dyna
    ns4
        valid_lft 6336sec preferred_lft 6336sec
    inet6 fe80::e24:64ff:fe62:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```

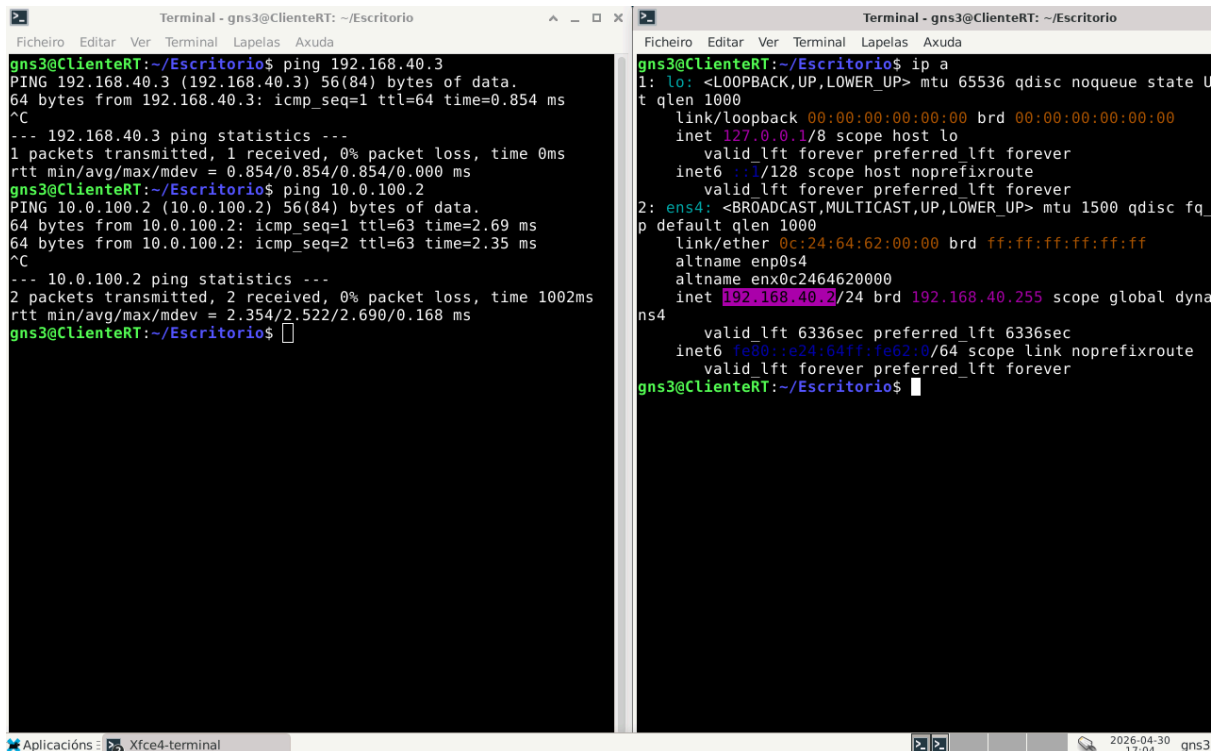

The image shows two terminal windows side-by-side. The left window shows ping tests from gns3@ClienteRT to 192.168.40.3 and 10.0.100.2. The first ping to 192.168.40.3 is successful. The second ping to 10.0.100.2 fails with 0% packet loss. The right window shows the output of the 'ip a' command, displaying network interface details for 'lo' and 'ens4'.

```

Terminal - gns3@ClienteRT: ~/Escritorio
gns3@ClienteRT:~/Escritorio$ ping 192.168.40.3
PING 192.168.40.3 (192.168.40.3) 56(84) bytes of data.
64 bytes from 192.168.40.3: icmp_seq=1 ttl=64 time=0.854 ms
^C
--- 192.168.40.3 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 0.854/0.854/0.854/0.000 ms

gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=2.69 ms
64 bytes from 10.0.100.2: icmp_seq=2 ttl=63 time=2.35 ms
^C
--- 10.0.100.2 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1002ms
rtt min/avg/max/mdev = 2.354/2.522/2.690/0.168 ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_
    link/ether 0c:24:64:62:00:00 brd ff:ff:ff:ff:ff:ff
    altname enx0c2464620000
    inet 192.168.40.2/24 brd 192.168.40.255 scope global dyna
    ns4
        valid_lft 6336sec preferred_lft 6336sec
    inet6 fe80::e24:64ff:fe62:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
  
```


DMZ


```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=4.74 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 4.741/4.741/4.741/0.000 ms
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 0c:e8:a7:c7:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0ce8a7c70000
    inet 10.0.100.2/24 brd 10.0.100.255 scope global dynamic noprefixroute ens4
        valid_lft 7049sec preferred_lft 7049sec
    inet6 fe80::ee8:a7ff:fec7:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```



IMPESC

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=3.02 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 3.017/3.017/3.017/0.000 ms
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default
qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group
default qlen 1000
    link/ether 0c:87:53:fd:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0c8753fd0000
    inet 192.168.50.2/24 brd 192.168.50.255 scope global dynamic noprefixroute ens
4
        valid_lft 7142sec preferred_lft 7142sec
    inet6 fe80::e87:53ff:fed:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```


OPENVPN

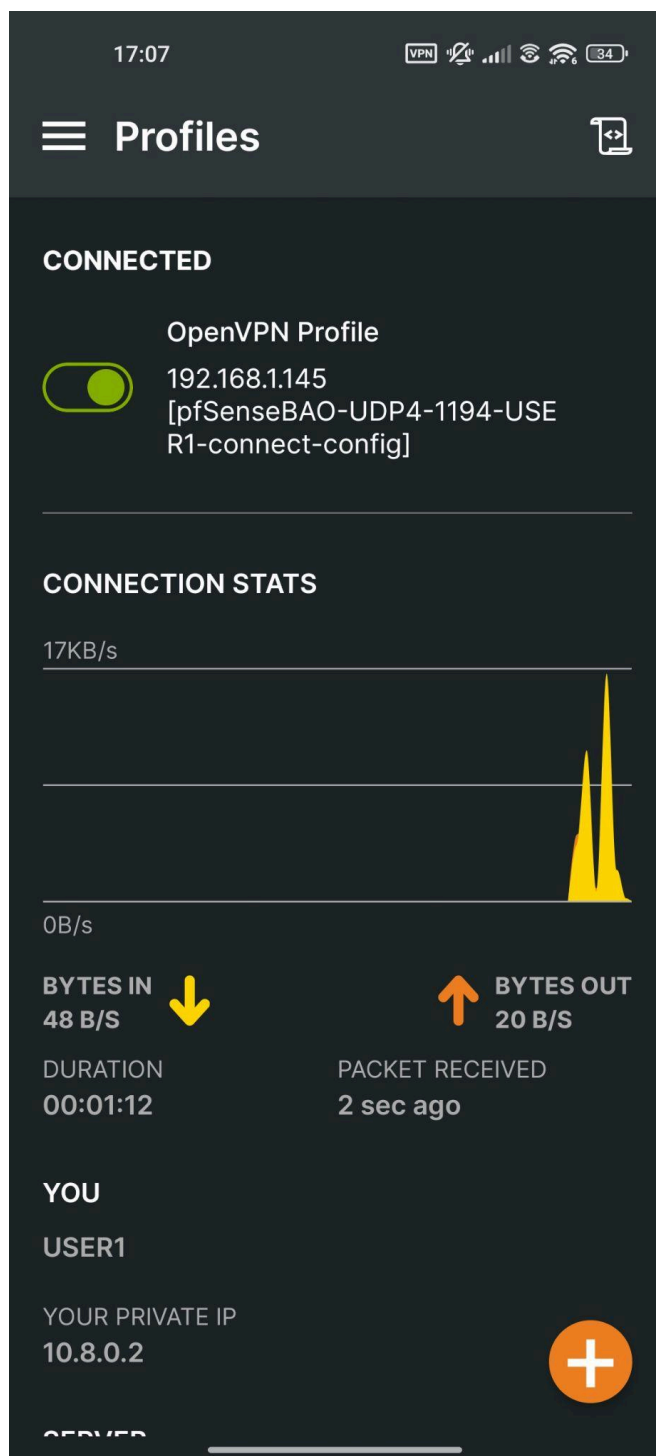

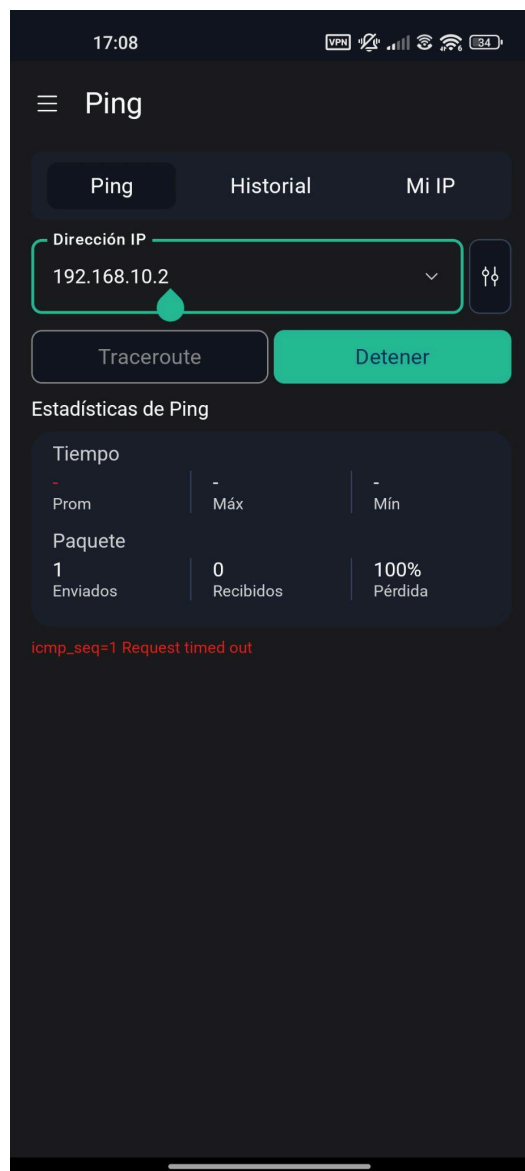

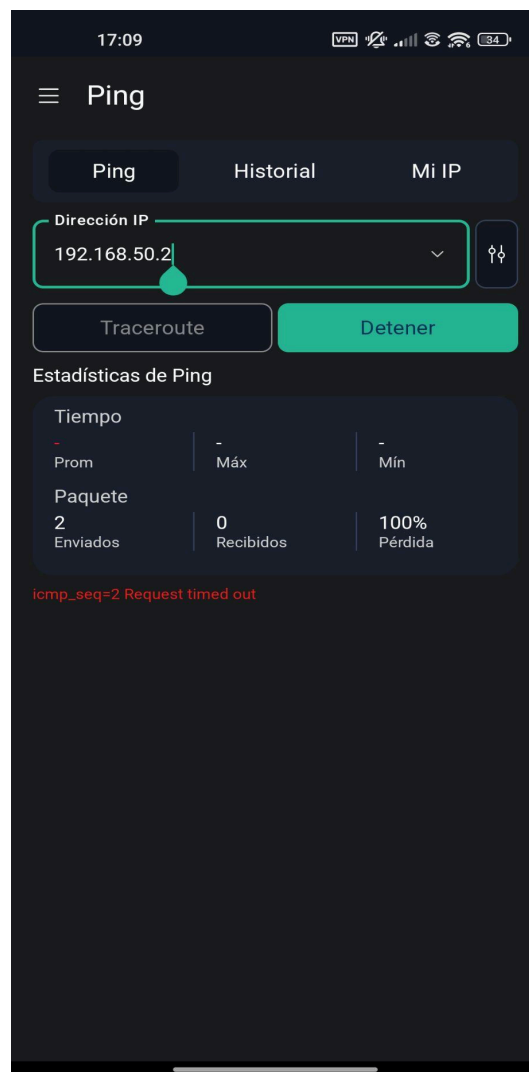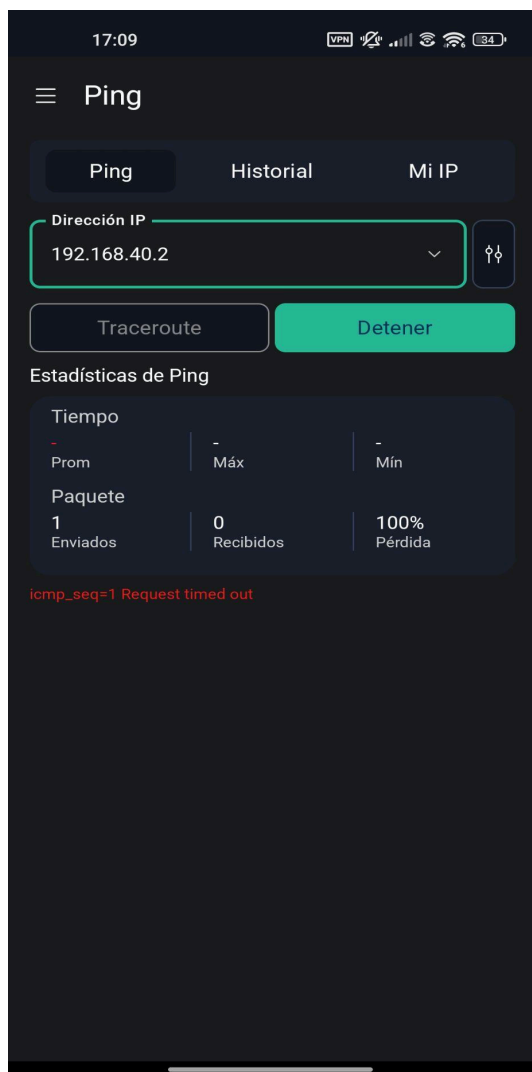



PINGS DESDE LA VPN CONECTADA EN LINUX

```
profesorado@PCA110-padron:~$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1002ms

profesorado@PCA110-padron:~$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1003ms

profesorado@PCA110-padron:~$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1003ms

profesorado@PCA110-padron:~$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
^C
--- 192.168.50.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1019ms

profesorado@PCA110-padron:~$
```

```

profesorado@PCA110-padron:~$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
64 bytes from 192.168.20.2: icmp_seq=1 ttl=63 time=2.62 ms
64 bytes from 192.168.20.2: icmp_seq=2 ttl=63 time=3.55 ms
64 bytes from 192.168.20.2: icmp_seq=3 ttl=63 time=1.61 ms
^C
--- 192.168.20.2 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2004ms
rtt min/avg/max/mdev = 1.612/2.595/3.553/0.792 ms
profesorado@PCA110-padron:~$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=3.04 ms
64 bytes from 10.0.100.2: icmp_seq=2 ttl=63 time=3.37 ms
64 bytes from 10.0.100.2: icmp_seq=3 ttl=63 time=3.61 ms
^C
--- 10.0.100.2 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2003ms
rtt min/avg/max/mdev = 3.042/3.342/3.612/0.233 ms
profesorado@PCA110-padron:~$ ifconfig
docker0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    inet 172.17.0.1 netmask 255.255.0.0 broadcast 172.17.255.255
    ether 12:9f:4e:26:63:52 txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0


enp1s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.220.137 netmask 255.255.255.0 broadcast 192.168.220.255
    inet6 fe80::593a:b20d:a5ce:258c prefixlen 64 scopeid 0x20<link>
    ether 7c:57:58:39:ac:5a txqueuelen 1000 (Ethernet)
    RX packets 42698 bytes 56925597 (56.9 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 18435 bytes 1609506 (1.6 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 601 bytes 63842 (63.8 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 601 bytes 63842 (63.8 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

tun0: flags=4305<UP,POINTOPOINT,RUNNING,NOARP,MULTICAST> mtu 1500
    inet 10.8.0.3 netmask 255.255.255.0 destination 10.8.0.3
    inet6 fe80::251:ae9a:47af:3c37 prefixlen 64 scopeid 0x20<link>
    unspec 00-00-00-00-00-00-00-00-00-00-00-00-00-00-00 txqueuelen 500 (UNSPEC)
    RX packets 215 bytes 22485 (22.4 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 480 bytes 56426 (56.4 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

```

PINGS DESDE LA VPN CONECTADA DESDE WINDOWS

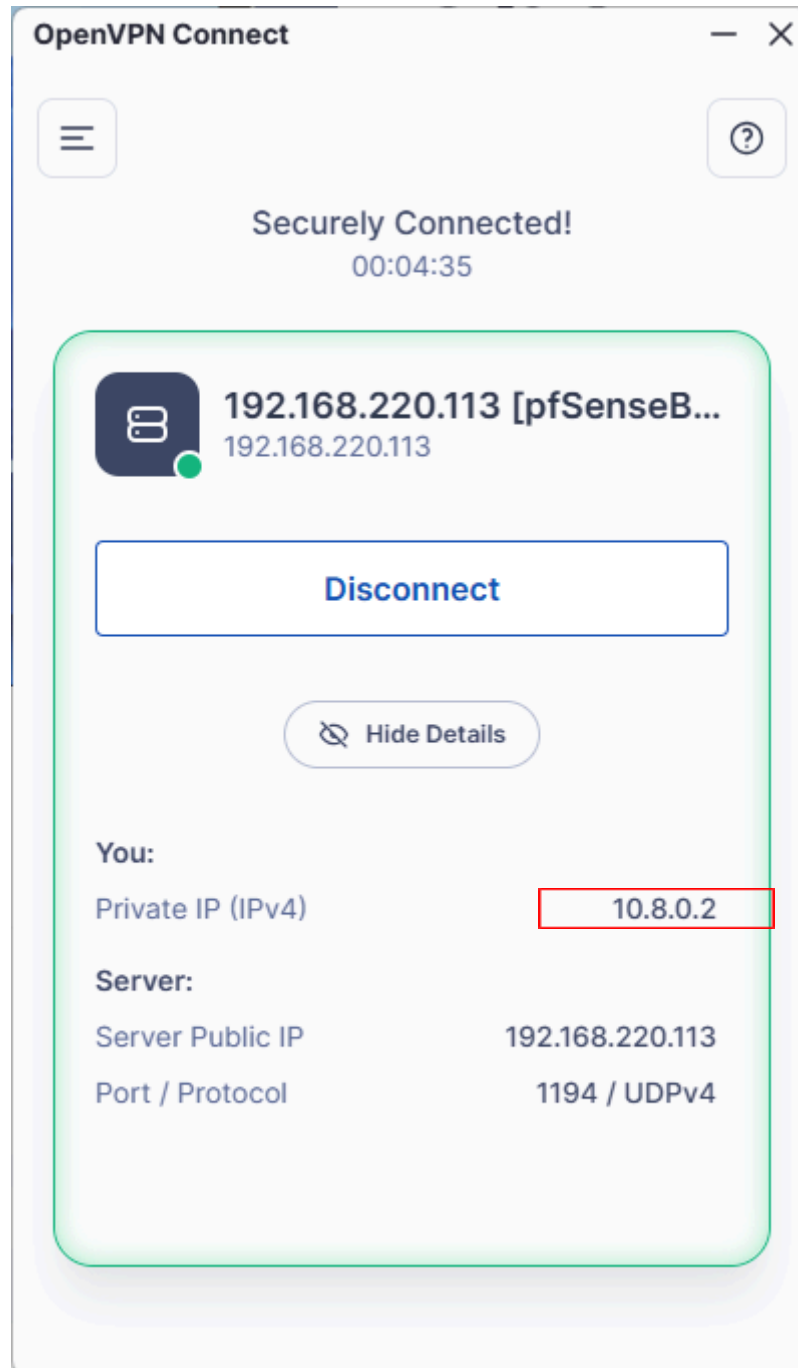

```
C:\Users\Alumno st2>ping 192.168.10.2

Haciendo ping a 192.168.10.2 con 32 bytes de datos:
Control-C
^C
C:\Users\Alumno st2>ping 192.168.30.2

Haciendo ping a 192.168.30.2 con 32 bytes de datos:
Control-C
^C
C:\Users\Alumno st2>ping 192.168.40.2

Haciendo ping a 192.168.40.2 con 32 bytes de datos:
Control-C
^C
C:\Users\Alumno st2>ping 192.168.50.2

Haciendo ping a 192.168.50.2 con 32 bytes de datos:
Control-C
^C
C:\Users\Alumno st2>
```



```
Microsoft Windows [Versión 10.0.26200.8246]  
(c) Microsoft Corporation. Todos los derechos reservados.
```

```
C:\Users\Alumno st2>ping 192.168.20.2
```

```
Haciendo ping a 192.168.20.2 con 32 bytes de datos:  
Respuesta desde 192.168.20.2: bytes=32 tiempo=4ms TTL=63  
Respuesta desde 192.168.20.2: bytes=32 tiempo=4ms TTL=63  
Respuesta desde 192.168.20.2: bytes=32 tiempo=13ms TTL=63
```

```
Estadísticas de ping para 192.168.20.2:  
    Paquetes: enviados = 3, recibidos = 3, perdidos = 0  
    (0% perdidos),  
    Tiempos aproximados de ida y vuelta en milisegundos:  
        Mínimo = 4ms, Máximo = 13ms, Media = 7ms
```

```
Control-C
```

```
^C
```

```
C:\Users\Alumno st2>ping 10.0.100.2
```

```
Haciendo ping a 10.0.100.2 con 32 bytes de datos:  
Respuesta desde 10.0.100.2: bytes=32 tiempo=4ms TTL=63  
Respuesta desde 10.0.100.2: bytes=32 tiempo=4ms TTL=63  
Respuesta desde 10.0.100.2: bytes=32 tiempo=5ms TTL=63
```

```
Estadísticas de ping para 10.0.100.2:  
    Paquetes: enviados = 3, recibidos = 3, perdidos = 0  
    (0% perdidos),  
    Tiempos aproximados de ida y vuelta en milisegundos:  
        Mínimo = 4ms, Máximo = 5ms, Media = 4ms
```

```
Control-C
```

```
^C
```

```
C:\Users\Alumno st2>ipconfig
```

```
Configuración IP de Windows
```

```
Adaptador desconocido Conexión de área local:
```

```
Sufijo DNS específico para la conexión. . . :  
Vínculo: dirección IPv6 local. . . . . : fe80::858f:1bcf:60ec:9bbf%4  
Dirección IPv4. . . . . : 10.8.0.2  
Máscara de subred . . . . . : 255.255.255.0  
Puerta de enlace predeterminada . . . . . :
```

PINGS ENTRE USUARIOS VPN

```
braisjrz@VMNTT:~$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.1.142 netmask 255.255.255.0 broadcast 192.168.1.255
    inet6 fe80::9d53:bae1:1295:385e prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:78:cf:fa txqueuelen 1000 (Ethernet)
    RX packets 829755 bytes 1237241155 (1.2 GB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 28114 bytes 4538078 (4.5 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Bucle local)
    RX packets 1298 bytes 138236 (138.2 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 1298 bytes 138236 (138.2 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

tun0: flags=4305<UP,POINTOPOINT,RUNNING,NOARP,MULTICAST> mtu 1500
    inet 10.8.0.2 netmask 255.255.255.0 destination 10.8.0.2
    inet6 fe80::9821:d7b9:38c7:9031 prefixlen 64 scopeid 0x20<link>
    unspec 00-00-00-00-00-00-00-00-00-00-00-00-00-00-00-00 txqueuelen 500 (UNSPEC)
    RX packets 25692 bytes 31384744 (31.3 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 4626 bytes 1010929 (1.0 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

braisjrz@VMNTT:~$ ping 10.8.0.3
PING 10.8.0.3 (10.8.0.3) 56(84) bytes of data.
64 bytes from 10.8.0.3: icmp_seq=1 ttl=128 time=5.80 ms
^C
--- 10.8.0.3 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 5.801/5.801/5.801/0.000 ms
```

Símbolo del sistema

```
Sufijo DNS específico para la conexión. . . :
Vínculo: dirección IPv6 local. . . : fe80::d0f2:a58b:3b43:a879%24
Dirección IPv4. . . . . : 10.8.0.3
Máscara de subred. . . . . : 255.255.255.0
Puerta de enlace predeterminada. . . . . :

Adaptador de Ethernet Ethernet0:

Sufijo DNS específico para la conexión. . . :
Vínculo: dirección IPv6 local. . . : fe80::d173:926e:7db6:9788%11
Dirección IPv4. . . . . : 192.168.1.141
Máscara de subred. . . . . : 255.255.255.0
Puerta de enlace predeterminada. . . . . : 192.168.1.1

Adaptador desconocido OpenVPN Connect DCO Adapter:

Estado de los medios. . . . . : medios desconectados
Sufijo DNS específico para la conexión. . . :

C:\Users\NTT_User>ping 10.8.0.2

Haciendo ping a 10.8.0.2 con 32 bytes de datos:
Respuesta desde 10.8.0.2: bytes=32 tiempo=9ms TTL=63
Respuesta desde 10.8.0.2: bytes=32 tiempo=8ms TTL=63

Estadísticas de ping para 10.8.0.2:
    Paquetes: enviados = 2, recibidos = 2, perdidos = 0
              (0% perdidos),
    Tiempos aproximados de ida y vuelta en milisegundos:
        Mínimo = 8ms, Máximo = 9ms, Media = 8ms
```

