

University of Brasília – UnB  
Faculty UnB Gama – FGA  
Electronic Engineering

# **Automation and Instrumentation of a Workbench for Braking Tests**

Author: João Victor Avancini Guimarães  
Advisor: Evandro Leonardo Silva Teixeira Ph.D.

Brasília, DF  
2017





João Victor Avancini Guimarães

# **Automation and Instrumentation of a Workbench for Braking Tests**

Thesis submitted to the course of undergraduate in Electronic Engineering at the University of Brasília, as a partial requirement to obtain a Bachelor's degree in Electronic Engineering.

University of Brasília – UnB

Faculty UnB Gama – FGA

Advisor: Evandro Leonardo Silva Teixeira Ph.D.

Brasília, DF

2017

---

João Victor Avancini Guimarães

Automation and Instrumentation of a Workbench for Braking Tests/ João  
Victor Avancini Guimarães. – Brasília, DF, 2017-  
70 p. : il. (some colors.) ; 30 cm.

Advisor: Evandro Leonardo Silva Teixeira Ph.D.

Graduation Thesis – University of Brasília – UnB  
Faculty UnB Gama – FGA , 2017.

1. Electronic Instrumentation. 2. Braking Tests. I. Evandro Leonardo Silva  
Teixeira Ph.D.. II. University of Brasilia. III. Faculty UnB Gama. IV. Automation  
and Instrumentation of a Workbench for Braking Tests

CDU 02:141:005.6

---

João Victor Avancini Guimarães

## **Automation and Instrumentation of a Workbench for Braking Tests**

Thesis submitted to the course of undergraduate in Electronic Engineering at the University of Brasília, as a partial requirement to obtain a Bachelor's degree in Electronic Engineering.

Thesis approved. Brasília, DF, 01<sup>st</sup> of december of 2017:

---

**Evandro Leonardo Silva Teixeira**  
**Ph.D.**  
Advisor

---

**Wellington Avelino do Amaral Ph.D.**  
Invited Lecturer

---

**Marcelino Monteiro de Andrade**  
**Ph.D.**  
Invited Lecturer

Brasília, DF  
2017



*This work dedicated to all who seek knowledge and truth.*





# Acknowledgements

First of all I thank my parents Rita de Cassia and Carlos and my brothers Frederico, Pedro and Ana for all their efforts, dedication and support over the years.

To my uncles Maria Aparecida and Luís Henrique for the reception and support during my graduation.

To my supervisor Prof. Dr. Evandro Leonardo Silva Teixeira for his patience, support and teachings given throughout my stay at the University of Brasilia.

To my friends Mairon, Phelippe and Joel for companionship along the course.

To the teachers Julia Peterle, Casé Marques, Patrícia Lovatti, Aline Demuner, Graciela Ramos, Genildo Ronchi, Carmen Santos, Ricardo Fragelli, Adson Rocha, Eneida Valdes, Renato Lopes, Gerardo Pizo, Cristiano Miosso, Gilmar Beserra, André Penna, Fabiano Soarez, Gustavo Cueva, Richard Pearl, Josh Reynolds, Eleanor Baldwin, Steve Hegarty, Wellington Amaral, Marcelino Andrade, Sebastián Rondineau and other teachers that I had the privilege of knowing over the years.



*“Science, my lad, is made up of mistakes, but they are mistakes which it is useful to  
make, because they lead little by little to the truth.”  
(Jules Verne, A Journey to the Center of the Earth)*



# Abstract

This paper aims to design the automation of a testbench for brake tests. There are already consolidated standards rules for brake system testing, this research project is focused with respect to *SAE J2522* regulation that addresses on brakes tests on passenger vehicles. The major focus of the project is to ensure a resilient solution for the testbench in order to make possible the acquisition of all relevant physical information and to automate the tests.

**Key-words:** Electronic Instrumentation. Brake Test. Automotive Systems Simulation.



# List of Figures

Figura 1 – Schematic for disk brake systems (NICE, 2017) . . . . .	29
Figura 2 – <i>Crankshaft Position Sensor</i> (REMAN, 2016) . . . . .	29
Figura 3 – Magnetic Sensor Signal (DESCONHECIDO, 2016a) . . . . .	30
Figura 4 – Thermocouple characteristic voltage output (UNKWNON, 2016) . . . . .	30
Figura 5 – Thermocouple Measurement (ECIL, 2016) . . . . .	31
Figura 6 – Distension (INSTRUMENTS, 2016a) . . . . .	32
Figura 7 – Wheatstone bridge (INSTRUMENTS, 2016b) . . . . .	32
Figura 8 – Piezo Accelerometer (UK, 2016) . . . . .	33
Figura 9 – Operational Amplifier (OMEGATRON, 2007) . . . . .	33
Figura 10 – Operational Amplifier (SALURI, 2009) . . . . .	34
Figura 11 – Instrumentation Amplifier (DESCONHECIDO, 2016b) . . . . .	35
Figura 12 – INA 118 (INSTRUMENTS, 2000a) . . . . .	36
Figura 13 – Schematic Relay (TESCHLER, 2016) . . . . .	37
Figura 14 – Project Problem Depuration (GUIMARAES, 2017c) . . . . .	41
Figura 15 – Hardware Project Architecture (GUIMARAES, 2017a) . . . . .	45
Figura 16 – <i>ATmega238p</i> (COORPORATION, 2011) . . . . .	46
Figura 17 – INA125 Schematic (INSTRUMENTS, 1998) . . . . .	48
Figura 18 – Conditioning Circuit for the Load Cell . . . . .	49
Figura 19 – Weg CFW-08 Frequency Inverter (WEG, 2017) . . . . .	50
Figura 20 – Sallen-Key Active Low Pass Filter (TEXAS INSTRUMENTS, 1999) . . . . .	52
Figura 21 – PWM to Speed Reference Circuit . . . . .	54
Figura 22 – Microcontroller Code Map (GUIMARAES, 2017b) . . . . .	56





# List of Tables

Table 1 – Thermocouples and their operation ranges . . . . .	31
Table 2 – Blocks functionality . . . . .	42



# List of abbreviations and acronyms

SAE	Society of Automotive Engineers.
GUI	Graphical User Interface.
ABS	Anti-lock Braking System.
CKP	Crankshaft Position Sensor.
GPIO	General-Purpose Input/Output
SRAM	Static Random-Access Memory
EEPROM	Electrically Erasable Programmable Read-Only Memory
DIP28	Dual In-line Package 28pins
ISR	Interruption Service Routine
IC	Integrated Circuit
MCU	Microcontroller Unit
I <sup>2</sup> C	Inter-Integrated Circuit
DAQ	Data Acquisition



# List of symbols

Pa	Pascal: Unit used to measure pressure.
kPa	$10^3$ Pascal.
MPa	$10^6$ Pascal.
°C	Celsius Degree: Unit used to measure temperature.
kph	Kilometer per hour: Unit used to measure speed.
m	Meters: SI unit used to measure distance.
cm	$10^{-2}$ Meters.
s	Seconds: SI unit for measuring time.
ms	$10^{-3}$ Seconds.
hp	Horsepower: Unit used to measure power.
kB	KiloBytes: Used to measure memory size.
V	Volts: SI unit for measuring electrical potential.
mv	$10^{-3}$ Volts.
$\Omega$	Omega: SI unit for measuring electrical resistance.
A	Ampere: SI unit for measuring electrical current.
mA	$10^{-3}$ Ampere.
g	Earth gravity acceleration ( $9.8m/s^2$ ).



# Summary

<b>1</b>	<b>INTRODUCTION</b>	<b>23</b>
<b>1.1</b>	<b>The need for performing brake tests</b>	<b>24</b>
<b>1.2</b>	<b>Purpose of the project</b>	<b>25</b>
<b>1.3</b>	<b>Text Structure</b>	<b>25</b>
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>27</b>
<b>2.1</b>	<b>Instrumentation Engineering</b>	<b>27</b>
<b>2.2</b>	<b>The <i>SAE J2522</i> regulation</b>	<b>27</b>
<b>2.3</b>	<b>Working principles of disk brake systems</b>	<b>28</b>
<b>2.4</b>	<b>Electronic Background</b>	<b>28</b>
2.4.1	Crankshaft Position Sensor	28
2.4.2	Thermocouple	29
2.4.3	Load Cell	31
2.4.4	Accelerometer	32
2.4.5	Instrumentation Amplifier	33
2.4.5.1	The Operational Amplifier	33
2.4.5.2	The Closed-loop amplifier	34
2.4.6	The Instrumentation Amplifier	34
2.4.7	The Relay	36
2.4.8	Microcontroller	36
<b>3</b>	<b>METHODOLOGY</b>	<b>39</b>
<b>3.1</b>	<b>Literature Review</b>	<b>39</b>
<b>3.2</b>	<b>Problem Description</b>	<b>39</b>
<b>3.3</b>	<b>Project Conception</b>	<b>39</b>
<b>3.4</b>	<b>Case Study</b>	<b>39</b>
<b>4</b>	<b>PROBLEM ANALYSIS AND PROJECT REQUIREMENTS</b>	<b>41</b>
<b>4.1</b>	<b>Problem Analysis</b>	<b>41</b>
4.1.1	Brake System Simulator	41
4.1.2	Lower Layer Hardware	42
4.1.3	Higher Layer Hardware	42
4.1.4	Solution Overview	42
<b>4.2</b>	<b>Monitored parameters</b>	<b>43</b>
<b>4.3</b>	<b>Functional Requirements of the Testbench</b>	<b>43</b>
<b>4.4</b>	<b>Software Requirements</b>	<b>44</b>

<b>5</b>	<b>HARDWARE PROJECT</b>	<b>45</b>
<b>5.1</b>	<b>MCU</b>	<b>45</b>
<b>5.2</b>	<b>Temperature Acquisition Channel</b>	<b>46</b>
<b>5.3</b>	<b>Brake Pressure Acquisition Channel</b>	<b>47</b>
<b>5.4</b>	<b>Speed Acquisition Channel</b>	<b>49</b>
5.4.1	CKP Signal Condition	49
<b>5.5</b>	<b>Acceleration Acquisition Channel</b>	<b>49</b>
<b>5.6</b>	<b>Speed Reference Output Channel</b>	<b>49</b>
5.6.1	Speed Control	49
5.6.2	Filter characteristics definition	50
5.6.3	Sallen-Key Low Pass Active Filter	52
5.6.4	Final Circuit	54
<b>6</b>	<b>SOFTWARE PROJECT</b>	<b>55</b>
<b>6.1</b>	<b>Microcontroller Code</b>	<b>55</b>
6.1.1	Microcontroller programming basics	55
6.1.2	Microcontroller Code Map	55
<b>6.2</b>	<b>Computer Software</b>	<b>57</b>
6.2.1		57
	<b>REFERENCES</b>	<b>59</b>
	<b>APPENDIX</b>	<b>63</b>
	<b>APPENDIX A – FIRST APPENDIX</b>	<b>65</b>
<b>A.1</b>	<b>Micontroller Code</b>	<b>65</b>



# 1 Introduction

With the advancement of technology cars are leaving the factory each time with more power for more affordable prices. In 1995 the best-selling car in Brazil ([HERNANDES, 2017](#)) (*Volkswagen Gol Plus 1.0*) had 49.8hp of maximum power and brand-new would accelerate from nought to 100kph in 22.4 seconds ([CNW, 2017b](#)) while sales champion of 2015 *Volkswagen Gol 1.0* had 76hp of maximum power and could do the same challenge in 13.3 seconds ([CNW, 2017a](#)), almost half the time from the previous. Interesting fact is even though the latter is 20 years younger, both cars have similar brake systems, disk brakes in the front and drum ones in the back. To make things worse, the younger one does not have ABS *Anti-lock Braking System*, which only became mandatory for cars manufactured from 2014 and beyond according to brazilian regulations.

Although this is short analysis has only two subjects it brings up that maybe manufactures and customer are too focused in performance rather than safety. Of course for a standard customer it is obviously hard too evaluate the breaking performance of a vehicle upon buying it. Government and legal authorities have been creating strict regulations for manufactures too follow in order to ensure that cars have a higher standard of safety.

Brake systems are extremely important in terms of safety because even though cars nowadays are required to have a higher performances in crash tests it is always favored too avoid collisions.

Brake tests with full scale vehicles are expensive and this somehow makes extensive testing unfeasible. Also the time required for each test might be a constrain. It is a possibility that maybe using small scale tests it would still be possible to provide relevant information about quality and performance of brake systems with lower costs and reduced time. Small scale tests do not have the purpose of fully replacing full scale ones, but the savings in costs and time that they can provide could be used for mass testing, and this can already show their utility and relevance ([GARDINALLI, 2005](#)).

Judging the brake efficiency of a vehicle as a whole involves a lot of factors, a small scale test will not provide results that could be used directly to address the quality of a car break system but it is possible to focus the results in the performance of individual componentes of the system such as pads, disks and calipers ([HALDERMAN; MITCHELL, 2016](#)), and evaluating the performance of this components is a good start for judge the brake capacity of a brake system.

Braking tests have been carried out for years and have been regulated for some time. A international standard for brake testing has been the regulation *SAE J2522* ([SAE](#),

2016), it gives a the description of how break tests should be conducted for evaluating low weight passengers cars.

## 1.1 The need for performing brake tests

The brake system is a critical part of an automobile, thanks to this system it is possible to use the latter under safe conditions both in urban and rural areas. There are some ideal requirements that a brake system should be able to attend (KAWAGUCHI, 2005) :

- Reduce the speed of a moving vehicle, increasing the deceleration of the same.
- Stop the vehicle completely.
- Maintain the vehicle speed, preventing unwanted acceleration in downhill paths.
- Keep the vehicle motionless while it is parked.

It is important to emphasize that this conditions are ideal, considering that in extremely hazardous or stressful situations the system might not operate properly and will not attend thoose previous requirementes. Considering the importance of brake system the same need to have minimal breaking capacity so vehicles can be decelerated with greater effiience.

In contrast, more effective brake systems means more cost to manufactures and consenquently to customers. Theoretically this would meant that manufactures need to choose a trade-off between quality and cost. However, the point in which this trade-off is setted is determined by governament regulations. Moreover if there was no general regulations each car manufacturer would have a standard that they judge is sufficient. In Brazil the governament partitions that define this regulations are the *National Traffic Council* and the *National Institute of Meteorology, Quality and Technology*, most of those regulations are based in the european regulation ECE-13/05 (INMETRO, 2013) .

Considering the importance of regulatory standards, the need for brake tests becomes even more evident as it is mandatory to ensure that brake-systems will attend to regulations requirementes. Only with extensive testing it is possible to ensure that a particular system will attend to all standards regarding it's category of operation.

Making all theese considerations, a *Break-System-Testbench* may be considered a useful device for the automotive industry. Considering that it would be able to simulate a close enough replica of real evironments and situations that a brake system is submitted, this testbench could allow car manufactures and break system parts manufactures to avoid

expenses in tests as they would be able to test different parts of the system in a assisted and controlled environment.

## 1.2 Purpose of the project

The purpose of this work is too develop, implement and test a microcontrolled electronic instrument system for monitoring and controlling a small scale brake-testbench based on the information from the international regulation *SAE J2522* ([SAE, 2016](#)). The system will comprehend both software and hardware layers and should be able to perform brake tests and acquire physical data through sensors in order to judge brake systems components level of performance.

## 1.3 Text Structure

The rest of this paper was divided on chapters briefly explained bellow.

**Chapter 2, Literature Review:** This chapter will explore somo concepts and aspects of engineering and of brake tests that are considered fundamental to following parts of this paper.

**Chapter 3, Methodology:** This is the where the strategy for developing this paper and the engineering solutions it proposes are dicussed.

**Chapter 4, Problem Analysis and Project Requirements:** On this chapter the problem this project tries to solve will be defined in a specific way and the project requirements, both from hardware and software will be enumerated. Also, based on this requirements the parameters that the final solution will have to monitor in order to meet thoose requirements will be listed.

**Chapter 5, Hardware Project:** This chapter provides a detailed explanation of each of the hardware solutions that were either developed, integrated or implemented on this project.

**Chapter 6, Software Project:** This chapter is basically splitted in two parts, one for explaining the code from the bottom layer of the solution (low level hardware) and one for explaining the code from the upper layer (high level hardware).



## 2 Literature Review

### 2.1 Instrumentation Engineering

Instrumentation engineering has existed for long but only recently it has become a independent field of engineering. The instrumentation engineer has a wide variety of work, designing, developing, installing, managing equipments that are used to monitor and control machinery (SHREE, 2016);

Instrumentation engineering may be defined as the branch of engineering that focus on the principle and operation of measuring and control instruments (WEBSTER; EREN, 2014). This kind of engineer may be responsible for integrating the sensors with signal condition circuits and data acquisition systems, transmitters, displays or control systems. Sometimes the instrumentation engineer is the person acquainted to estipulate the hardware/software trade-offs, because this engineer has the proper knowledge to decide which solutions are more feasible and economically viable either using hardware or software solutions (MANDELL, 1972).

“Instrumentation and control engineers work with the industries with the goal of improving productivity, optimisation, stability, reliability, safety and continuity. These engineers design, develop, and maintain and manage the instruments and the instrumentation systems. Instrumentation engineer is the person who takes call on what kinds of instruments are needed for ensuring efficiency and quality of the end product”(YOU, 2012).

### 2.2 The *SAE J2522* regulation

*SAE International* was founded in 1905 and the acronym SAE stands for Society of Automotive Engineers. Nowadays their emphasis is on transports industries, such as automotive, aerospace and commecial vehicles. One of their main activity is providing parameters and regulations of quality and safety standards for the industry. One great example of their operation is the SAE has long provided standards for horsepower rating.

More related to this project is the *SAE J2522*, entitled *Dynamometer Global Brake Effectiveness*, at the beggining it already states the it’s utility with the following:

“The SAE Brake Dynamometer Test Code Standards Committee considers this standar useful in supporting the technological efforts intended to improve motor vehicle braking systems overall performance and safety”

(SAE, 2003). This regulation was developed to be used in conjunction with other test standards in order to address the friction of a certain material to check its adequacy for a certain application. It is important to state that this paper is based on the *SAE J2522*, it is not a faithful application of the standard though. This paper is more concerned about the settings of the tests mentioned on the regulation rather than the formulas and criteria for a materials engineering analysis.

All the tests mentioned on the regulation can be generalised on repetitive cycles of accelerating the rotor to a specified speed and applying brake force (may vary along the test) until the rotor reaches a lower limit of speed. On the regulation, sometimes the deceleration ratio is also defined but not always. Initial temperature is also defined, some tests can only be performed if the brake parts are under a certain temperature.

## 2.3 Working principles of disk brake systems

This section will give a short explanation of how disk brakes work as the vast majority of cars and motorcycles nowadays are equipped with this technology instead of the outdated drum scheme.

In general terms we can make an analogy of how disk brake works with how bicycles brakes work. In a bicycle the brake calipers squeeze the wheels in order to promote deceleration to the wheel and reduce the bike speed. In disk brakes the calipers apply pressure to the rotor *disk*, the rotor is directly connected to the wheel spinning at the same speed, this way the system decelerates the rotor and the wheel trying to reduce the vehicle speed. In car disk brakes there is a component called pad, as seen on Figure 1 pads are located between the calipers and the rotor. Pads have the functionality to reduce the wear generated by friction in the rotor. In normal conditions during proper maintenance calipers are hardly-ever replaced, pads are replaced every once in a while and disks are replaced also every once in a while but less frequently than pads.

## 2.4 Electronic Background

At this section some electronic components and transducers are going to be revised in order to make paper more knowledgeable.

### 2.4.1 Crankshaft Position Sensor

A Crankshaft Position Sensor is shown in Figure 2.

This sensor is widely used in the automotive industry to determine the speed (RPM) of cranks and gears in the engine. There are several types of CKP sensors, the

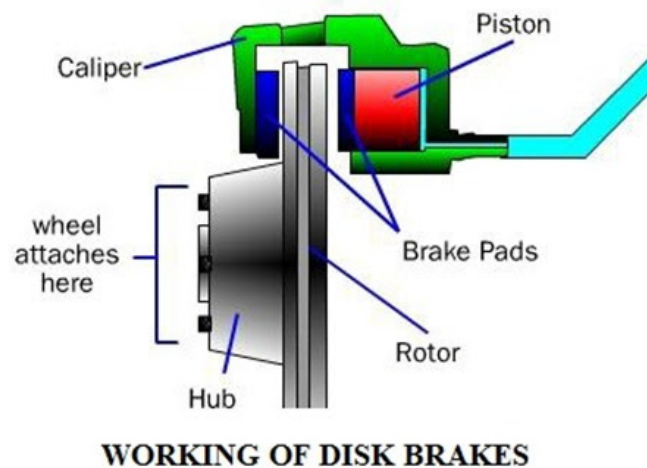


Figura 1 – Schematic for disk brake systems (NICE, 2017)



Figura 2 – Crankshaft Position Sensor (REMAN, 2016)

most common are the variable reluctance type because they have low cost and good accuracy (SCHROEDER, 2002).

Variable reluctance sensors, commonly known as magnetic sensors, are passive sensors, that is, they do not require power for their operation. As the gear in question rotates each tooth of the gear aligns with the sensor, a magnetic flux in the sensor coil changes as the air gap between the sensor and the gear changes. This change in the magnetic field generates induces a voltage pulse at the sensor output. This type of sensors have an analog voltage output where amplitude and frequency vary proportionally to the speed of rotation of a gear. With this type of sensor it is possible to extract data of linear velocity, angular velocity and angular position. However, only the angular velocity data (frequency) is important for this project.

## 2.4.2 Thermocouple

Since the 19<sup>th</sup> century it is known that the junction between two different metals submitted to a heat flow generates a electromotive force. A thermocouple is a device

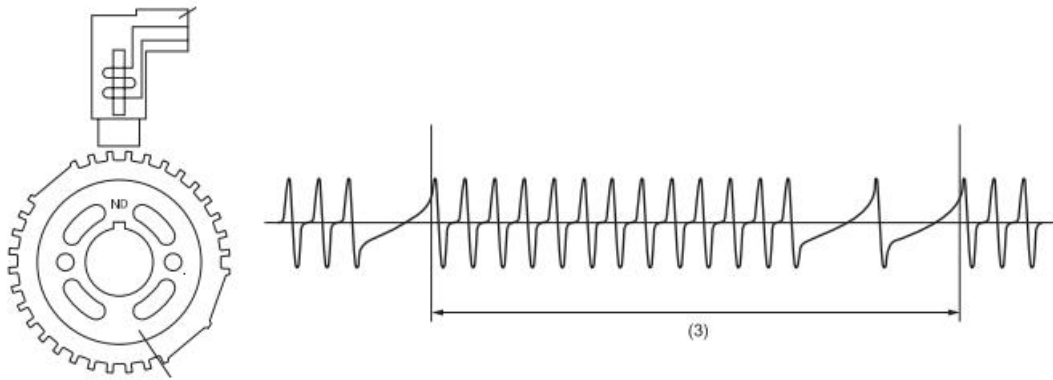


Figura 3 – Magnetic Sensor Signal (DESCONHECIDO, 2016a)

that has this junction of two different metals and has a known voltage generated output proportional to the heat transfer on the junction. In theory any combination of two different metals could be used, but there are normalized combinations which produces more stable and predictable voltage outputs. (POLLOCK, 1991) This relation between heat transfer and voltage is known not to be linear as Figure 4 shows (E,J,K,T,R,S and B are designators for normalized thermocouples junction types).

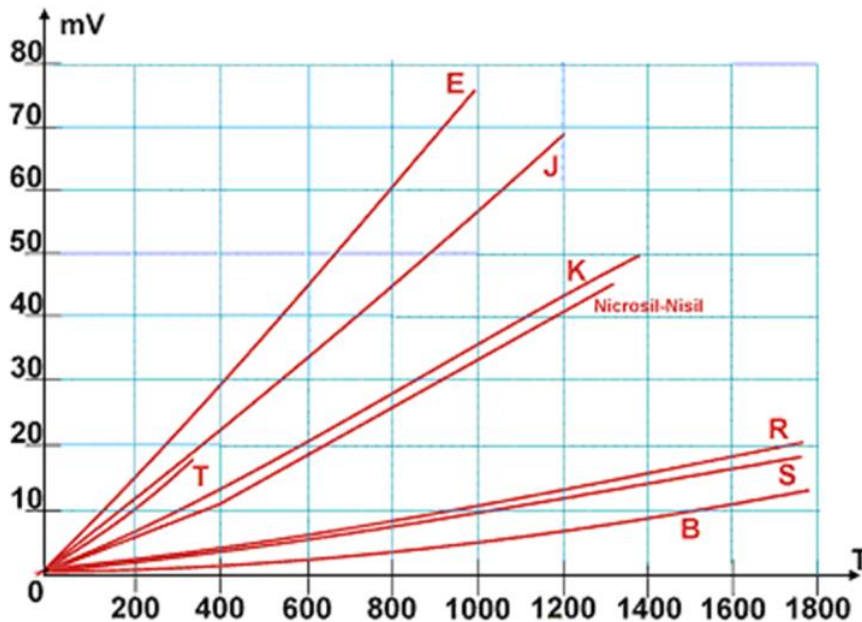


Figura 4 – Thermocouple characteristic voltage output (UNKWNON, 2016)

Thermocouple actually have two junctions, a hot junction (the one that is submitted to heat transfers) and a cold junction (also called reference junction). What the thermocouple really measures is the difference between the temperature of this two junctions, this means that in a hypothetical situation which the hot junction is submmited to a 100°C and the cold junction is submitted to a environmental temperature of 25°C,



after thermal equilibrium is reached the thermocouple voltage will be proportional to a temperature of 75°C. Hence the thermocouple will only produce a "real" output voltage when the cold junction is submitted to a 0°C (in some calibrations procedures the cold junction is actually submitted to 0°C) (KINZIE; RUBIN, 1973).

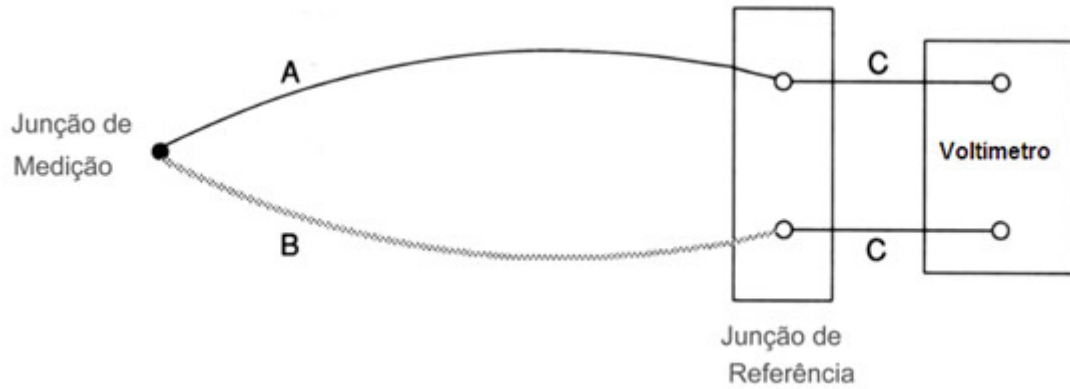


Figura 5 – Thermocouple Measurement (ECIL, 2016)

There is a big variety of thermocouples available, table ?? shows the most common thermocouples and there temperature range.

Table 1 – Thermocouples and their operation ranges

	<i>Thermocouple Type</i>	<i>Range of Operation (°C)</i>
??	J	0 a 750
	K	-200 a 1250
	E	-200 a 900
	T	-250 a 350

### 2.4.3 Load Cell

The load cell is a transducer formed by strain gauges. Thoose are devices which their electrical resistance varies proportionally to their distension. Distension is a quantification of the deformation of a body, it can also be defined as a fractional change of the body of a body. Distension may be negative (compression) or positive (traction).

Generally, the length variation in a strain gauge is very small and this makes them very susceptible to measurement errors. As a result, the use of a Wheatstone bridge is very common, it is formed by four resistive arms and an excitation voltage applied to the bridge (WINDOW; HOLISTER et al., 1982).

The voltage output  $V_O$  can be obtained from the Equation 2.1 above:

$$V_O = \frac{R_3}{R_3 + R_4} - \frac{R_2}{R_1 + R_2} \quad (2.1)$$

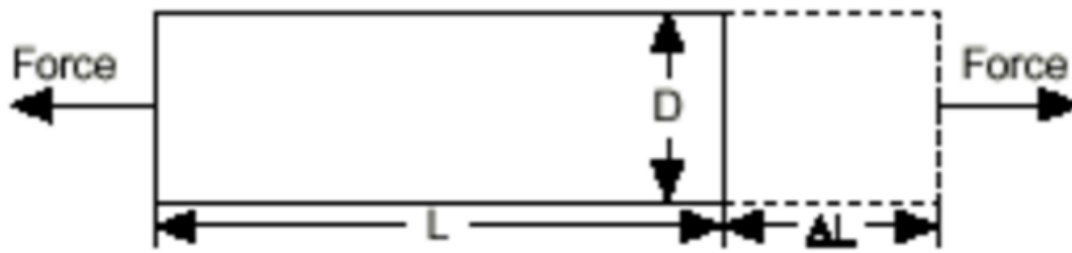


Figura 6 – Distension (INSTRUMENTS, 2016a)

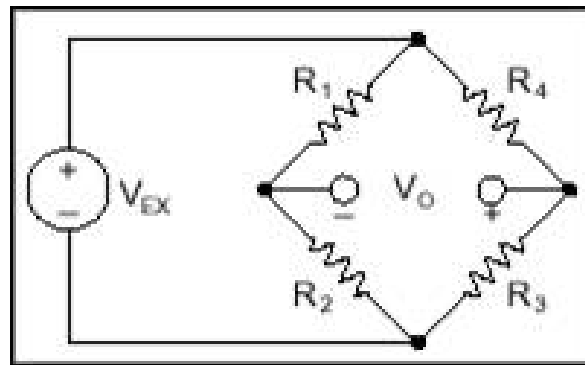


Figura 7 – Wheatstone bridge (INSTRUMENTS, 2016b)

#### 2.4.4 Accelerometer

A body is said to vibrate when it describes an oscillatory movement around a reference point (FERNANDES, 2000). For the measurement of vibration in machines it is more common the measurement of the acceleration as a function of  $g$  ( $9.8m/s^2$ ). The same is measured as a function of  $g$  as a function of Einstein's Principle of Equivalence, where the acceleration of a reference data is not distinguishable from the gravitational action on it (JR, 1968).

Accelerometers are sensors that measure acceleration itself, that is, the acceleration that the sensor itself is subjected to. Accelerometers are widely used in the automotive industry, initially only in the Air Bag system and currently even for vehicle stability control.

Currently the most common accelerometers are those based on the piezoelectric effect, this effect discieves the variation of electrostatic force or electric voltage in a material when subjected to a force.

By measuring this variation of electrostatic force or electrical voltage it is possible to determine the acceleration that the sensor has undergone. In Figure 8 we can observe that there is a mass in the piezoelectric material, so when the sensor is submitted to some movement, based on the principle of inertia the mass will exert a force of traction or compression which will generate a voltage variation at the sensor output (PATRICK,

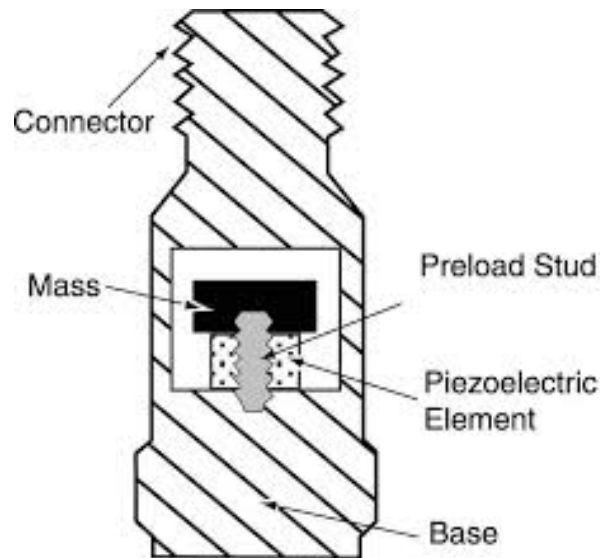


Figura 8 – Piezo Accelerometer ([UK, 2016](#))

[2007](#)).

## 2.4.5 Instrumentation Amplifier

### 2.4.5.1 The Operational Amplifier

A Operational Amplifier can be defined as a voltage amplifier with a differential input and a single-ended output. Operational Amplifiers are usually referred just as *OpAmps*. Those devices are largely used in electronic circuits, theoretically they have infinite input impedance and infinite gain, this means that OpAmps do not drain current from the signals they are amplifying and they can amplify this signals with any gain ([MANCINI, 2003](#)). Figure 9 shows the schematic symbol of the OpAmp.

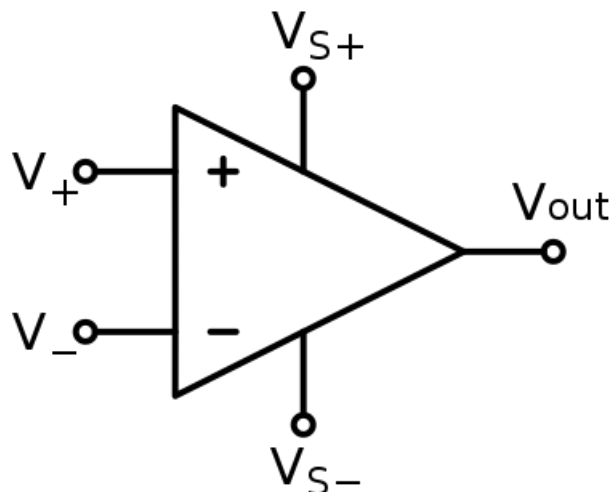


Figura 9 – Operational Amplifier ([OMEGATRON, 2007](#))

$V_+$  and  $V_-$  are the OpAmp inputs,  $V_{S+}$  and  $V_{S-}$  are the power supply inputs. The voltage output  $V_{out}$  is limited to the voltage values given by the power supply inputs. The gain of a operation amplifier can vary according to it's configuration, only the configuration relevant to this paper will be explained.

#### 2.4.5.2 The Closed-loop amplifier

This may be the most common configuration for the operational amplifier.

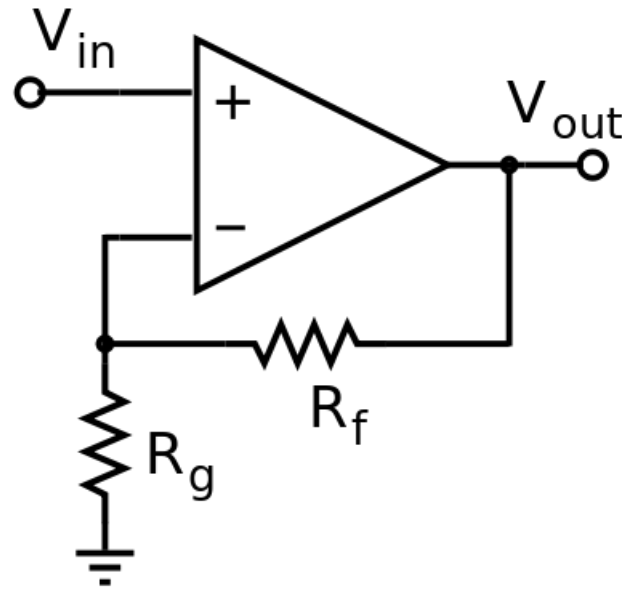


Figura 10 – Operational Amplifier (SALURI, 2009)

The output voltage of this amplifier is given by Equation ?? (DORF; SVOBODA, 2014a).

$$V_{out} = \left(1 + \frac{R_f}{R_g}\right) \cdot V_{in} \quad (2.2)$$

The disadvantage of this OpAmp configuration is that only gains greater than one are achievable, in electronic instrumentation this is not a common issue because in this field of electronic engineering amplification is usually done to increase the resolution of signals, not to reduce it.

#### 2.4.6 The Instrumentation Amplifier

In general, sensors and transducers have very low voltage output levels (specially passive transducers), and therefore an amplification is fundamental. The most commonly

used amplifier circuit in instrumentation engineering is the common joint differential amplifier more commonly referred as *Instrumentation Amplifier* (Figure 11), which is very stable and significantly reduces the output signal noise (WAIT; HUELSMAN; KORN, 1975).

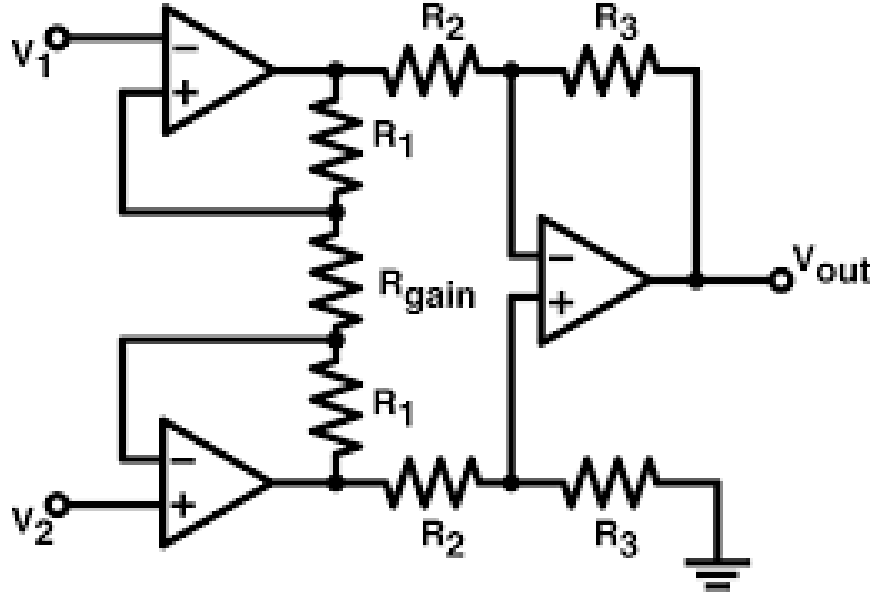


Figura 11 – Instrumentation Amplifier (DESCONHECIDO, 2016b)

The instrumentation amplifier has two stages, the first stage consists in amplifying both inputs of a sensor, with the gain of this amplification stage controlled by  $R_{gain}$  in Figure 11. The second stage consists in taking the difference of the two input signals. If the differentiation happens before the amplification, noise may be so big in the input signals that some signal information might be lost. In the instrumentation amplifier noise and signal is amplified on the first stage, considering that the noise is similar in both inputs the differential stage will take out the noise and only output the difference between both inputs. One advantage of this amplifier is that it has high input impedances, that means it will not drain significant current from the signal, i.e., it will not interfere with the measure (THOMSEN et al., 2003). Another advantage is that the gain of this amplifier can be adjusted with just one resistor (METTINGVANRIJN; PEPER; GRIMBERGEN, 1994).

The gain of the instrumentation amplifier is given by the following 2.4.6 (COUNTS; KITCHEN, 2006).

$$V_{out} = (V_2 - V_1) \cdot \left(1 + \frac{2 \cdot R}{R_{gain}}\right) \quad (2.3)$$

Something interesting to notice is that if we take out the  $R_{gain}$  (open load), the gain of the amplifier is equal to one. Besides this advantageous behavior of the instrumentation amplifier, it is quite hard to make it work with seven resistors and three operation amplifiers because of components imprecision. Hence, it is more practical to work with ICs that ensure the symmetry of between those components. As an example, there is the Texas Instruments INA118 (INSTRUMENTS, 2000b), which is one of many encapsulated solutions for the instrumentation amplifier, the schematic of this component is shown in Figure 12.

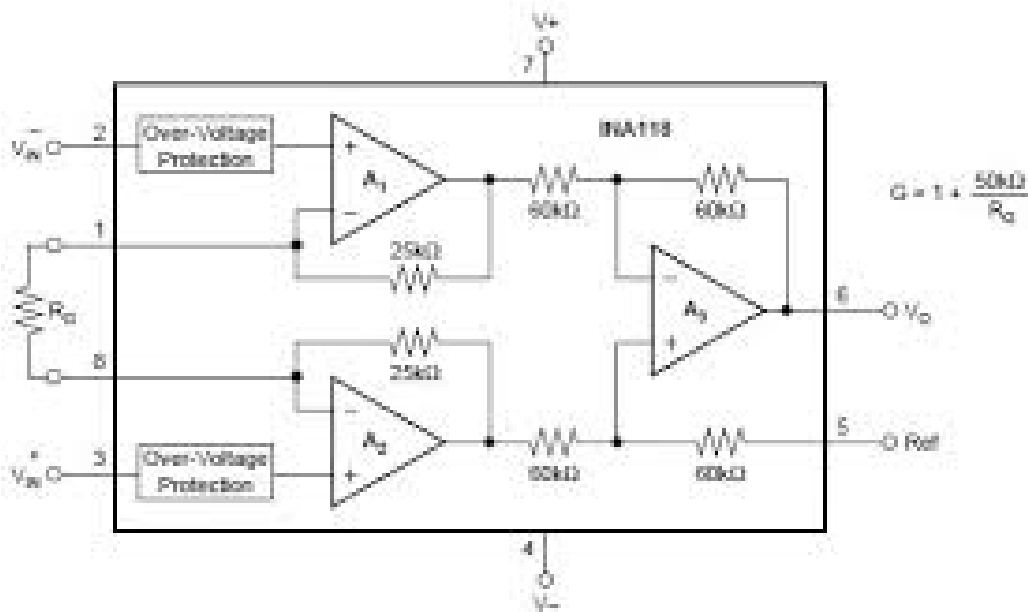


Figura 12 – INA 118 (INSTRUMENTS, 2000a)

### 2.4.7 The Relay

A relay is a device that acts as an electromechanical switch, it consists of three basic parts: a coil, a set of contacts and a reset spring as shown in Figure 13. When an electric current flows through the coil, this creates a magnetic flux that changes the state of the set of contacts thus changing the position of the switch. When the coil is de-energized the reset spring returns the key to its natural state. The relays are used for various applications in the automotive industry, because a relay allows two circuits to interact without there being an electric current transfer between them, in this way smaller power circuits can control higher current circuits and vice versa (KELLER, 1962) .

### 2.4.8 Microcontroller

A microcontroller is a compact computer on a single integrated circuit chip, in most cases a microcontroller (also referred by the acronym MCU) includes a processor,

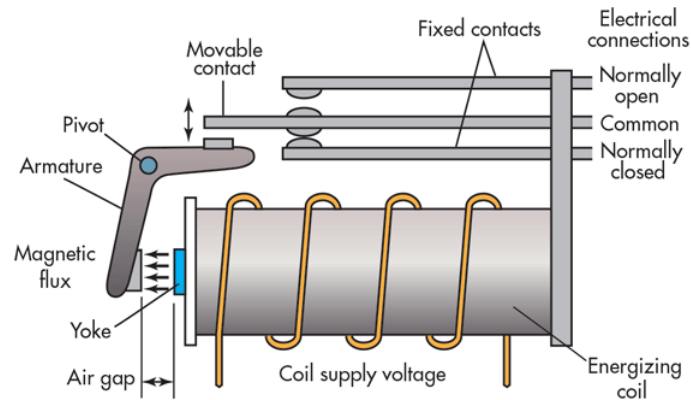


Figura 13 – Schematic Relay (TESCHLER, 2016)

volatile and non-volatile memory, input/output ports and other peripherals. The great thing about the microcontrollers is their low cost, many small appliances that does not require a powerful hardware are only economically viable because of those devices. The components a microcontroller has may vary, it is a responsibility of the project designer to decide the microcontroller that has the best fit (technically and economically) for the project.

Microcontrollers differ from microprocessors only in one thing, MCUs can be used standalone while microprocessors need other peripherals to be used. By reducing the size and cost compared to a design that uses a separate microprocessor, memory, and input/output devices, microcontrollers make it economical to digitally control even more devices and processes. “A microprocessor can be considered the heart of a computer system, whereas a microcontroller can be considered the heart of an embedded system”(ROUSE, 2012).

A great thing about microcontrollers is that they must provide provide real-time response to events, so for instrumentation they are crucial. With them it is possible to acquire signals with good sampling rates without loss of relevant information. It is common in electronic instrumentation to use MCUs to handle the events that have real-time constains and use more sophisticated hardware solutions to manage and process the acquired data later (BARTZ; ZHAKSILIKOV; OGAMI, 2004).





## 3 Methodology

In order to achieve the goals of this project the endeavours were divided into three

### 3.1 Literature Review

This stage can be considered the most important of the whole project because it lays the foundations for development of all that follows. This stage comprehended the knowledge needed in all further stages and steps of the project, even on the further stages of development it was necessary to review some of the information acquired on this part in order to achieve best results. On the Literature Review stage, concepts, components and other necessary information to make the foundations for the project were addressed. For instance it will be on this stage that the brake tests parameters and requirements will be analysed in order to choose the proper solutions for this project.

### 3.2 Problem Description

This particular stage consisted on the depuration of the problem in question, leading to a study of the requirements that were necessary to ensure in order to develop and execute the project.

### 3.3 Project Conception

After a deep problem analysis it was possible to address a more detailed solution description, in this stage the general solution was splitted in many smaller ones that were defined according to the requirements of the previous stage. All these solutions were focused in functionality, this is a project of electronic instrumentation, so the goal was not to develop electrical/electronic solutions from the beginning, it was evaluating the requirements and finding a group of components/solutions that combined in a particular and unique way could lead to this project achieving its goals.

### 3.4 Case Study

After the particular and smaller solutions are developed, tested and considered functional, the general solution of this project will be tested as a whole thing. This being doing a brake test that is capable of proving the functionality and usability of the developed technology.



## 4 Problem Analysis and Project Requirements

### 4.1 Problem Analysis

As mentioned in Section 1.2 this project aims on developing a functional brake test bench. Based on the *SAE J2522* (SAE, 2016) and considering some instrumentation engineering concepts the project solution can be divided in the structure showed in Figure 14.

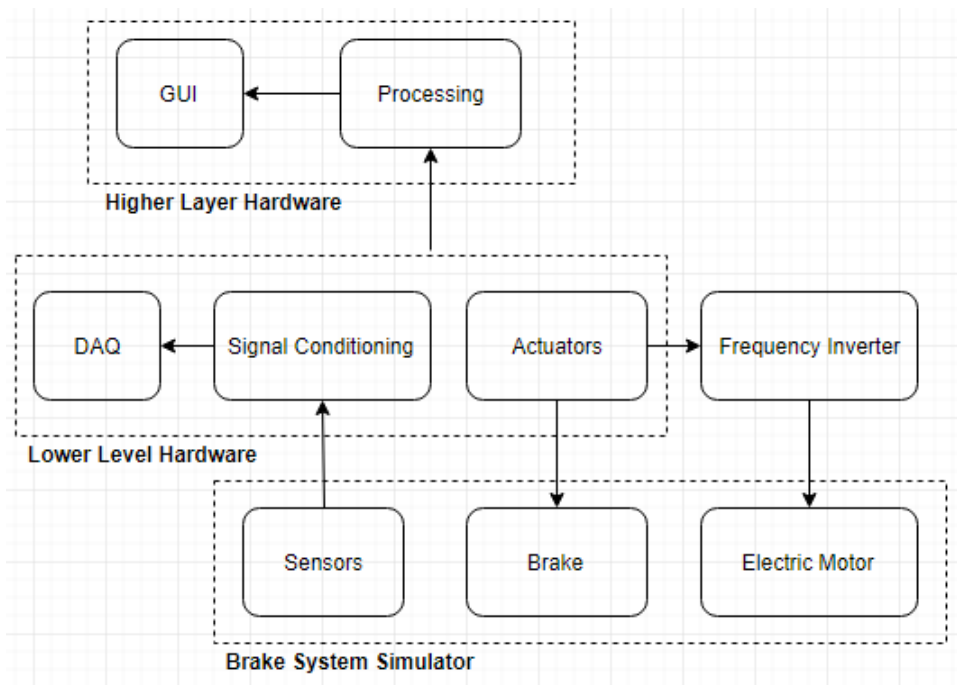


Figura 14 – Project Problem Depuration (GUIMARAES, 2017c)

The explanation of the structure of Figure 14 will be explained in Sections 4.1.1 to 4.1.4.

#### 4.1.1 Brake System Simulator

The *Brake System Simulator* block as the name says comprehends the hardware responsible for simulating the environment of a brake system, the two basic components are the *Brake* component itself (in this case being a disc brake system) and a *Electric Motor* to accelerate the rotor in order to simulate the speed a vehicle wheel might be submitted. A *Sensors* block was also added, without acquiring a physical/mechanical quantities such as temperature and pressure, a brake test would be useless because no

possible technical analysis could be done afterwards. The *Sensors* block was placed inside the *Brake System Simulator* block because the sensors and transducers will be placed around the components of this major block.

### 4.1.2 Lower Layer Hardware

This layer of hardware will make the translation from physical/mechanical quantities to computer data, *i.e.*, converting physical/mechanical quantities to voltage and then to bytes of information and also on the opposite way (bytes to voltage and voltage to physical/mechanical quantities). *Sensors* signals are not always ready to read, as mentioned in Section 2.1, Instrumentation Engineering also involves doing *Signal Conditioning* to adapt sensor signals. The *DAQ* block was inserted in order to demonstrate that there is the need for a solution to capture the sensors signals. *Actuators* block are responsible to adapt the commands from upper layers to control the hardware. The *Frequency Inverter* is already a more specific detail of the solution, but it was included here because most electric motors work with triphasic power and this device is fundamental to control them.

### 4.1.3 Higher Layer Hardware

This layer of hardware although represented in a quite simple way in Figure 14 will probably involve the most dense code. This is because this layer needs to do all the heavy data processing, *i.e.*, converting and dealing with the information that flows through all the structure. The *GUI* block is the one responsible for acquiring and displaying computer information in a human-friendly format.

### 4.1.4 Solution Overview

Table 2 shows the basic function of each block on Figure 14.

Table 2 – Blocks functionality

Block	Function
<i>Sensors</i>	Convert physical quantities to electrical signals
<i>Signal Conditioning</i>	Adapt sensors electrical signals to best suit DAQ
<i>DAQ</i>	Converts electrical signals to computes bytes
<i>Actuators</i>	Convert voltage levels to physical/mechanical quantities
<i>Frequency Inverter</i>	Controls a triphasic motor speed
<i>Processing</i>	Control and process data flow
<i>GUI</i>	Displays/acquire information in a human-friendly format

## 4.2 Monitored parameters

As mentioned before this paper will be based in the *SAE J2522* regulations, this regulation says that to evaluate the efficiency of a brake system it is mandatory to monitor temperature on the brake pads, the pressure applied on the disk and the speed of the rotor throughout all the process. Monitoring the vibration is not mandatory but has some advantages.

- *Temperature of brake pads:* During all test it is mandatory to have full knowledge of the temperature of the brake pads, firstly because of security reasons (there is upper limit for temperature in any system) and also because of the wear of parts that is related to temperature.
- *Pressure applied on the disks:* Knowing the magnitude of this force means being able to relate the pressure applied and the deceleration, knowing how the pressure applied increases the temperature of the pads and evaluate how this promotes wear of the parts.
- *Rotation speed:* Without knowing how the speed of the rotor varies over time it would be impossible to determine the acceleration and deceleration rates among many other issues.
- *Vibration:* As mentioned before this is not mandatory but rather interesting, measuring vibration makes it possible to determine how the extensive use can wear out the parts and reduce stiffness among other properties. Also it is natural that the system will vibrate during braking, minimal vibration or too much vibration can indicate a fault that in the future could damage the system.

## 4.3 Functional Requirements of the Testbench

According to the specification of the *SAE J2522* and according to parameters considered to be important, some requirements for the testbench were defined.

1. Measure a braking pressure up to 16 MPa.
2. Apply a braking pressure of at least 300 kPa.
3. Measure temperatures up to 600 °C
4. Measure temperatures with a minimal resolution of 7.5 °C.
5. Accelerate the rotor to a speed up to 200 kph.
6. System must have a sampling rate of 50ms.

7. The system hardware must be able to operate under temperatures up to 40°C.
8. System must have two acquisition channels for temperature.
9. System must have at least one channel for braking pressure acquisition.
10. System must have a channel for vibration acquisition.
11. System must have at least two digital outputs to control relays.
12. System must have a channel for acquiring speed.
13. The system must work with real time acquisition.

## 4.4 Software Requirements

1. System must have a sampling rate of 50 ms.
2. System must be able to monitor six analog channels at once.
3. System must be able to control the digital outputs and one analog output during acquisition without losing the real time constraint.
4. The data acquired does not need to be shown to user in real time.
5. The software layer must be able to record the data of the test.
6. The software highest layer must have a friendly GUI, advanced electronic and simple programmable knowledge cannot be a requirement to operate the software.
7. Calibration of the sensors data must be easy to modify on the software.
8. Software must be multiplatform.

## 5 Hardware Project

Based on the matters analysed on the previous sections of this paper a hardware architecture was defined and it displayed on the following Figure 15.

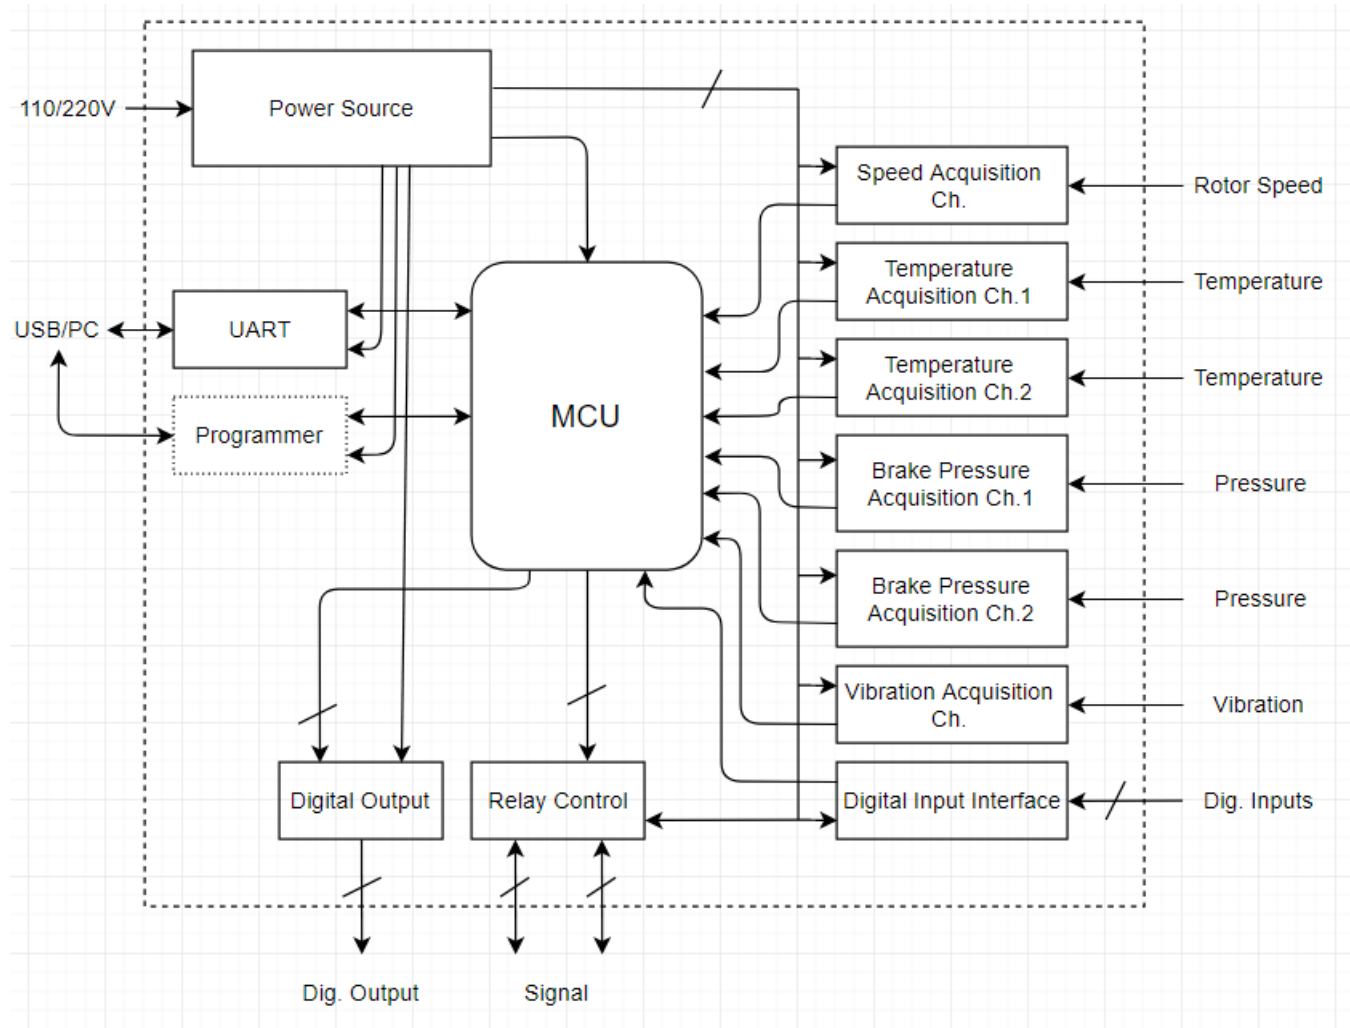


Figura 15 – Hardware Project Architecture (GUIMARAES, 2017a)

### 5.1 MCU

The system will be microcontrolled rather than microprocessed because this is the most practical way to ensure that the real-time constrain will be respected. The choosen microcontroller is the *ATmega328p* developed by *Atmel Corporation* with 32 Kb of flash memory, 1 Kb of *EEPROM* (Electrically Erasable Programmable Read-Only Memory), 32Kb of *SRAM* (Static Random Access Memory) and a 16 MHz clock. This micron-controller is widely used in academic environment (specially after the Arduino project

started, when microcontroller programming became much more feasible and reachable), and is famous for being easy and reliable to use. The *ATmega328p* has six ADC inputs with a resolution of 10 bits and more 14 GPIO ports. This microcontroller also has serial communication, I<sup>2</sup>C communication and other convenient features. It is really versatile and more important it meets this project requirements. This microcontroller will be used with a five volts supply, giving digital inputs and outputs a standard high logic level of five volts and low logic level of zero volts. The Figure 16 shows the pinage of this device in its most common footprint (DIP28).

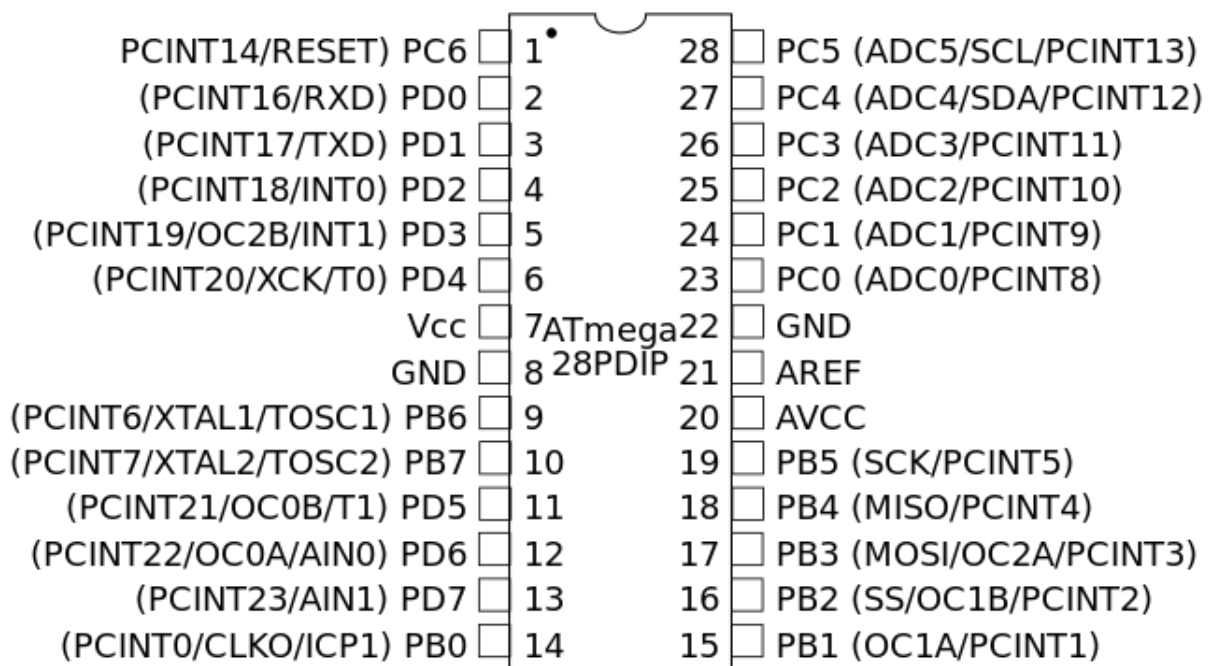


Figura 16 – *ATmega238p* (COORPORATION, 2011)

## 5.2 Temperature Acquisition Channel

For this project it was defined that thermocouples of type K (formed by the junction of two metal leagues: Alumel and Cromel) would be used in this project. This is because this specific type of thermocouple has a wide range of operation ( $-200^{\circ}\text{C}$  -  $^{\circ}\text{C}$ ), so according to the requirements they are never too close from the boundary values, a thermocouple of type T or even a type J would not be suitable. Other appealing factor is that this type of thermocouple is quite common so getting eventual replacements would be easier, in comparison with type E thermocouples.



## 5.3 Brake Pressure Acquisition Channel

A very influential parameter in a braking system is the pressure that the brake exerts on the rotor. Pressure is a magnitude measured in Pascal and can be expressed by the force ratio by the area. There are some sensors based on the piezoelectric effect, but the most accurate way to measure force is by using load cells.

Load cells have very low output levels, of the level of 2mV/V, and therefore an amplification is fundamental. It is not necessary to know the nature of the strain gauges when a load cell is being calibrated since generally the manufacturers provide a calibration curve based on the signals  $V_O$  and  $V_{EX}$  of the Figure 7, it is worth noting that these signals can not have the same reference, otherwise it will not be possible to excite the wheatstone bridge correctly.

The most common way to amplify the signal of a load cell is using a instrumentation amplifier. Although it is a widely used configuration, assembling this amplifier using three different operational amplifiers and seven resistors as in Figure 11 may make it inaccurate due to manufacturing imperfections of the components. Another factor that greatly influences the output signal of a load cell is the excitation voltage of its wheatstone bridge, if it varies too much the output will vary greatly as well, which will hamper its calibration.

In order to solve these two problems there is a solution widely used in the market which is the *INA125* of Texas Instruments, this IC besides performing signal amplification also provides a very precise excitation source for the wheatstone bridge, the only component required to be coupled is a resistor  $R_G$ , as shown in Figure 17. This resistor will determine the gain for the amplification according to the equations 5.1 and 5.2:

$$V_O = (V_{IN}^+ - V_{IN}^-) \cdot G \quad (5.1)$$

$$G = 4 + \frac{60k\Omega}{R_G} \quad (5.2)$$

Taking into account the sensitivity of 2mV/V, this means that if the cell is excited with 10V, its output will vary from 0 to 20mV. Since the analog input of the chosen microcontroller (Atmega328) is 0 to 5V, we may to amplify the cell output signal by a factor of 250 to increase precision. Using Equation 5.2, to obtain a gain of amplification ratio of the ideal  $R_G$  would be 243 $\Omega$ , a resistor of this value is not commercially available, the closest ones would be 240 $\Omega$  and 270 $\Omega$ . The first would cause a gain greater than 250 and consequently an IC output voltage greater than 5V when the cell had an output voltage of 20mV. The resistor 270 $\Omega$  will generate a gain of 226 and cause the IC output

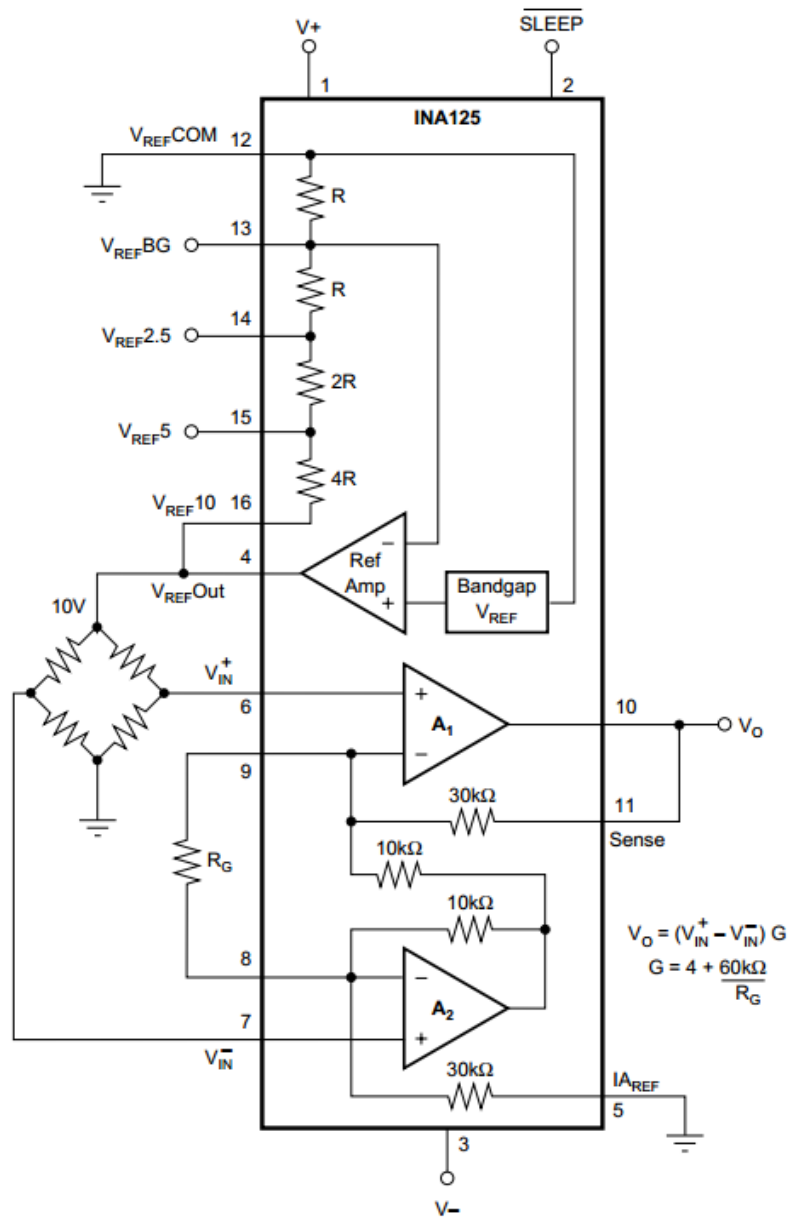


Figura 17 – INA125 Schematic (INSTRUMENTS, 1998)

to range from about 0V to 4.52V, using 90.4% of the resolution of the microcontroller input.

Figure 18 shows the schematic of the load cell conditioning circuit with the Texas Instruments INA125 IC.

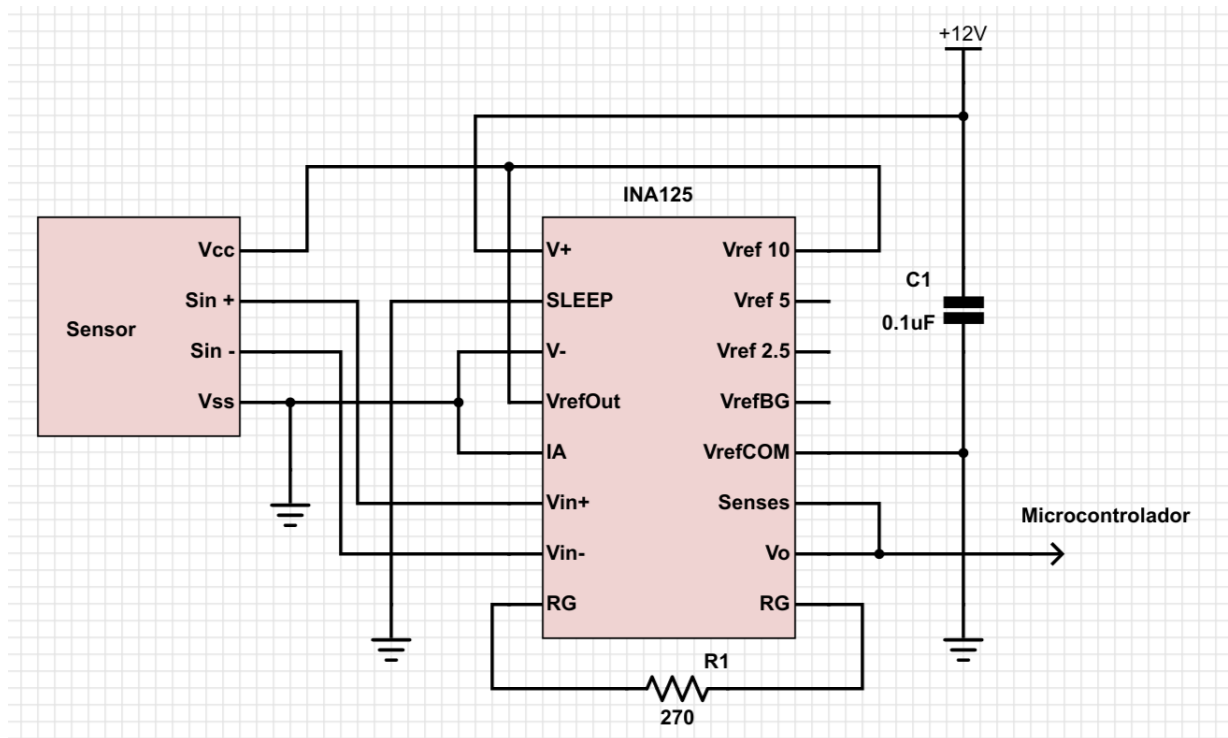


Figura 18 – Conditioning Circuit for the Load Cell

## 5.4 Speed Acquisition Channel

### 5.4.1 CKP Signal Condition

## 5.5 Acceleration Acquisition Channel

## 5.6 Speed Reference Output Channel

### 5.6.1 Speed Control

For the braketests, somethings as important as measuring the speed of the rotor is controlling it, as mentioned in Subsection 4.1.2. The rotor speed can be controlled in two ways:

- First way is the deceleration of the rotor with the aid of the brake system using the brake pads.

- Second way of controlling it by accelerating the rotor with the aid of the electric engine.

The electric engine used is a alternate current three-phase type, it in order to control it's speed a frequency inverter was used. The frequency inverter has many different controlling interfaces that lead to manipulating the three-phase electric system in order to control the engine's rotationary speed.

In this project the frequency inverter used was the *Weg CFW-08* (WEG, 2009), one way of controlling the speed of the rotor using this device is by using it's analog input, it can be configured as a notch to ten volts input that has a linear proportion to the the output frequency that goes to the engine, that way the problem to figure out in this solution is how to implement a analog output from a microcontroller that only has digital outputs.



Figura 19 – Weg CFW-08 Frequency Inverter (WEG, 2017)

### 5.6.2 Filter characteristics definition

Fortunately the microcontroller has pre-configured PWM (*Pulse Width Modulation*), as explained in Subsection , a PWM signal can encode a analog voltage value proportional to it's duty cycle, and this is usually done with the aid of a low pass filter that will extract this analog voltage from the PWM signal. As said in the previous paragraph the frequency inverter used in this project is the *Weg CFW-08*, and it's analog input has a zero to ten voltage input with eight bits of resolution. We can calculate the minimal voltage difference that will change the output frequency of the device using Voltage, in

which  $\delta V$  is the minimal voltage difference,  $V_{max}$  is the maximum voltage and " $n$ " is the number of bits of the input resolution.

$$\delta V = \frac{V_{max}}{2^n} \quad (5.3)$$

As mentioned in Section 5.1, the choosen MCU has a five volts high logic level, so a five volts PWM output will need to be amplificated with a gain ( $k$ ) of two in order to best the zero to ten volts input from the frequency inverter. As a consequence of that amplification the  $\delta V$  from the Equation 5.3 will be also amplificated with this gain ( $k$ ) of two. This way Equation 5.3 will be modified to consider this gain ( $k$ ) as Equation 5.4 shows.

$$\delta V = \frac{V_{max}}{k \cdot 2^n} \quad (5.4)$$

According to (ALTER, 2008), converting a PWM signal to a analog voltage generates a constant voltage ripple, in our case the maximum ripple is the  $\delta V$  from Equation 5.4. Equation 5.5 (METIVIER, 2013) gives the necessary  $\frac{dB}{decade}$  attenuation to guarantee a PWM converted signal desired ripple.

$$A_{dB} = 20 \cdot \log \left( \frac{V_{RIPPLE}}{V_{PWM}} \right) \quad (5.5)$$

And Equation 5.6 (METIVIER, 2013), is used to calculate the maximum needed cutoff frequency for the further to be designed LPF *Low-Pass-Filter* in order to convert the PWM signal to a analog voltage. This cutoff frequency can not be to much smaller than the one calculated otherwise this will have negative consequences to the output signal (KEIM, 2016). The slope value is the filter slope and for first order filters and second order filters this slope value is equal respectively to 20dB/decade and 40dB/decade (METIVIER, 2013).

$$f_c = f_{PWM} \cdot 10^{-\frac{A_{dB}}{Slope}} \quad (5.6)$$

It is possible to combine all this equations into one single equation to calculate

the needed cutoff frequency, is this done in Equation 5.7.

$$f_c = f_{PWM} \cdot 10^{-\frac{A_{dB}}{Slope}}$$

$$f_c = f_{PWM} \cdot 10^{-\frac{20 \cdot \log\left(\frac{V_{RIPPLE}}{V_{PWM}}\right)}{Slope}}$$

$$f_c = f_{PWM} \cdot 10^{-\frac{20 \cdot \log\left(\frac{V_{max}}{k \cdot V_{PWM}}\right)}{Slope}}$$

Knowing :

$$V_{max} = V_{PWM} \cdot k$$

$$x \cdot \log(A) = \log(A^x)$$

$$10^{\log(A)} = A$$

So :

$$f_c = f_{PWM} \cdot 2^{\frac{20 \cdot n}{Slope}}$$
(5.7)

As shown in Appendix A.1, the PWM frequency was defined so  $f_{PWM} = 62.5kHz$ , also  $n = 8$  and as according to (METIVIER, 2013), a second order LPF is better for converting a PWM signal to voltage and it has by default  $Slope = -40dB/decade$ , using Equation 5.7 it is possible to calculate a maximum cutoff frequency of 3906.25Hz.

### 5.6.3 Sallen-Key Low Pass Active Filter

The Sallen-Key LPF setup is probably one of the best second order filters architectures available (DORF; SVOBODA, 2014b), this setup is displayed on Figure 20.

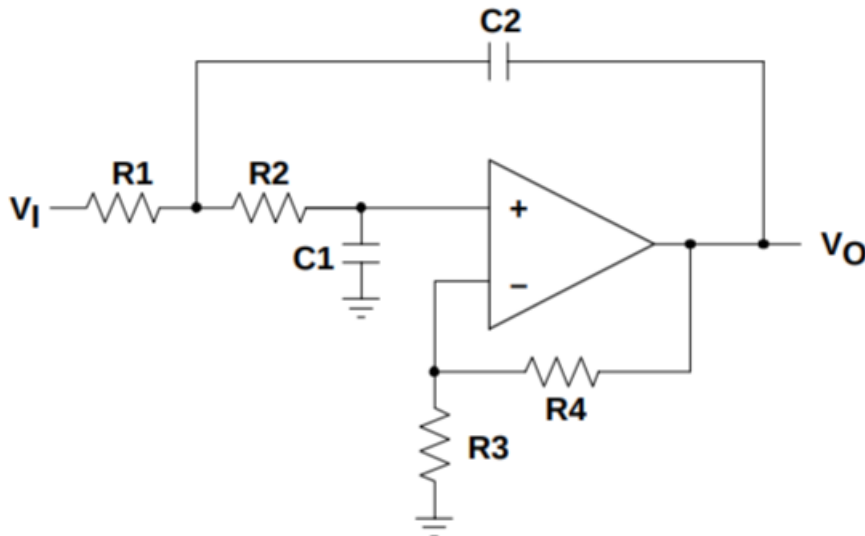


Figura 20 – Sallen-Key Active Low Pass Filter (TEXAS INSTRUMENTS, 1999)

According to (TEXAS INSTRUMENTS, 1999), this filter setup has a cutoff frequency defined by Equation 5.8, quality factor (Q) defined by Equation 5.9, gain(k) defined by Equation 5.10 and cutoff frequency given by Equation 5.11.

$$H(s) = \frac{k}{s^2 \cdot (R_1 \cdot R_2 \cdot C_1 \cdot C_2) + s \cdot (R_1 \cdot C_1 + R_2 \cdot C_1 + R_1 \cdot C_2 \cdot (1 - k)) + 1} \quad (5.8)$$

$$Q = \frac{\sqrt{R_1 \cdot R_2 \cdot C_1 \cdot C_2}}{R_1 \cdot C_1 + R_2 \cdot C_1 + R_1 \cdot C_2 \cdot (1 - k)} \quad (5.9)$$

$$k = 1 + \frac{R_4}{R_3} \quad (5.10)$$

$$f_c = \frac{1}{2 \cdot \pi \sqrt{R_1 \cdot R_2 \cdot C_1 \cdot C_2}} \quad (5.11)$$

As explained in Subsection 5.6.2, we need a gain of  $k = 2$  in the passing band. A useful design strategy is to set  $R_1 = m \cdot R$ ,  $R_2 = R$ ,  $C_1 = C$  and  $C_2 = n \cdot C$ . Replacing this values in Equation 5.9 gives a new Equation 5.12.

$$Q = \frac{\sqrt{m \cdot n}}{m + 1 - m \cdot n} \quad (5.12)$$

The quality factor of a Sallen-Key filter is influenced by the gain (k) and defines the dB gain on the cutoff frequency, ideally this factor should be closer as possible to  $\frac{\sqrt{2}}{2}$  ???. Setting a arbitrary value of  $m = 2$ , the ideal value of  $Q = \frac{\sqrt{2}}{2}$  and using Equation 5.12 it is possible to calculate a  $n = 0,6771$ . It is possible to simplify Equation 5.11 using the same method used to simplify Equation 5.9 to 5.12. Using this method will produce Equation 5.13 that will be used to determine the  $R \cdot C$  constant that will be later used to define the resistors and capacitor values of our filter.

$$R \cdot C = \frac{1}{2 \cdot \pi f_c \cdot \sqrt{m \cdot n}} \quad (5.13)$$

Using the previously calculated values for  $m$ ,  $n$ ,  $f_c$  and Equation 5.13 will give us a  $R \cdot C = 3.50115 \cdot 10^{-5}$ . Setting a arbitrary value of  $R = 10 \cdot 10^3$  will lead to  $C = 3.5 \cdot 10^{-9}$ . Using the relations:  $R_1 = m \cdot R$ ,  $R_2 = R$ ,  $C_1 = C$  and  $C_2 = n \cdot C$  and the commercial resistors and capacitors values from (BURGESS, 2015), will produce the following values:  $R_1 = 20k\Omega$ ,  $R_2 = 10k\Omega$ ,  $C_1 = 3600pF$  and  $C_2 = 2700pF$ . If these values are used in Equations 5.9 and 5.11, we will have a quality factor of 0.8164 and a cutoff frequency of 3609.71, both which are quite close from the ideal ones.

The last calculation remaining is the one to define  $R_3$  and  $R_4$  in order to guarantee a gain ( $k$ ) equal to two. Looking at Equation 5.10, in order to reach a  $k$  value equal to two, the only requirement is so  $R_3$  equals to  $R_4$ , so let's arbitrary set  $R_3 = R_4 = 10k\Omega$ .

### 5.6.4 Final Circuit

Based on all the previously calculations and on (TEXAS INSTRUMENTS, 1999), the final circuit will be the one in Figure 21. It was also added two Schottky Diodes for protection as (WALSH, 2017) shows how to.

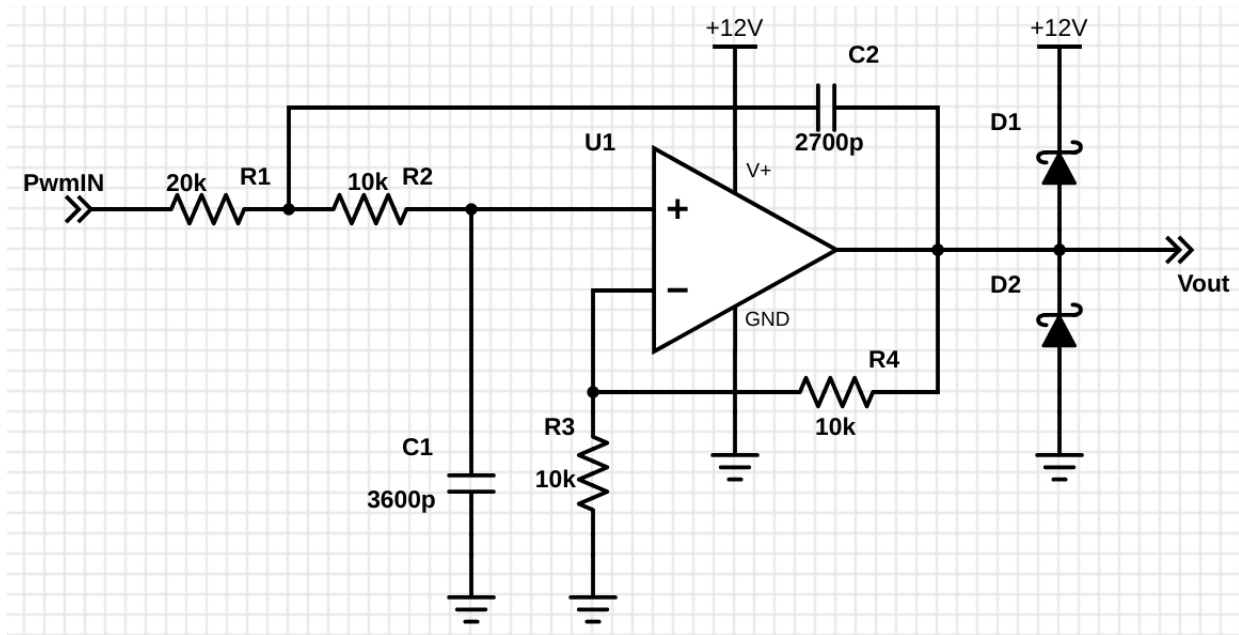


Figure 21 – PWM to Speed Reference Circuit



## 6 Software Project

This project has two layers of software that communicates with each other, the microcontroller program and a program executing in a computer. There were some functionalities that could be implemented on either layers, as the computer hardware is obviously superior than the microcontroller hardware everything that could be implemented in either layers was implemented in the computer software.

### 6.1 Microcontroller Code

#### 6.1.1 Microcontroller programming basics

Microcontrollers were traditionally programmed using Assembly language, nowadays we have a different scenario though. With the advancement of compilers, today it is most common to write the code for a microcontroller in C language and let the compiler translate it to a binary assembly format ([MAZIDI; NAIMI; NAIMI, 2010](#)). A convenient reason to use C is that it is one of the most efficient programming languages in terms of execution speed, this happens because it was designed to efficiently map typical machine instructions ([KERNIGHAN; RITCHIE, 2006](#)), so considering real-time constraints and other execution constraints in microcontrollers it is an excellent fit.

A microcontroller code is composed basically of two parts:

- *Setup*: This part of the code is only executed once, as the name may indicate, it is used to set properties, configure timers, inputs and other features of the hardware.
- *Loop*: This part of the code is executed continuously or until some condition is reached.

Other important component of a microcontroller code are interruptions. It is possible to interrupt the standard execution of a program when an event happens, or as it is more common to say, when an event triggers an interruption. This event may be a timer overflow, an event triggered by an input change among other things. Interrupt routines are really useful when working with instrumentation and timers, because using interruptions it is feasible to meet real-time requirements in a project ([MUKARO; CARELSE, 1999](#)).

#### 6.1.2 Microcontroller Code Map

The Figure [22](#) shows a functional map of the microcontroller code that can be found entirely in Appendix [A.1](#).

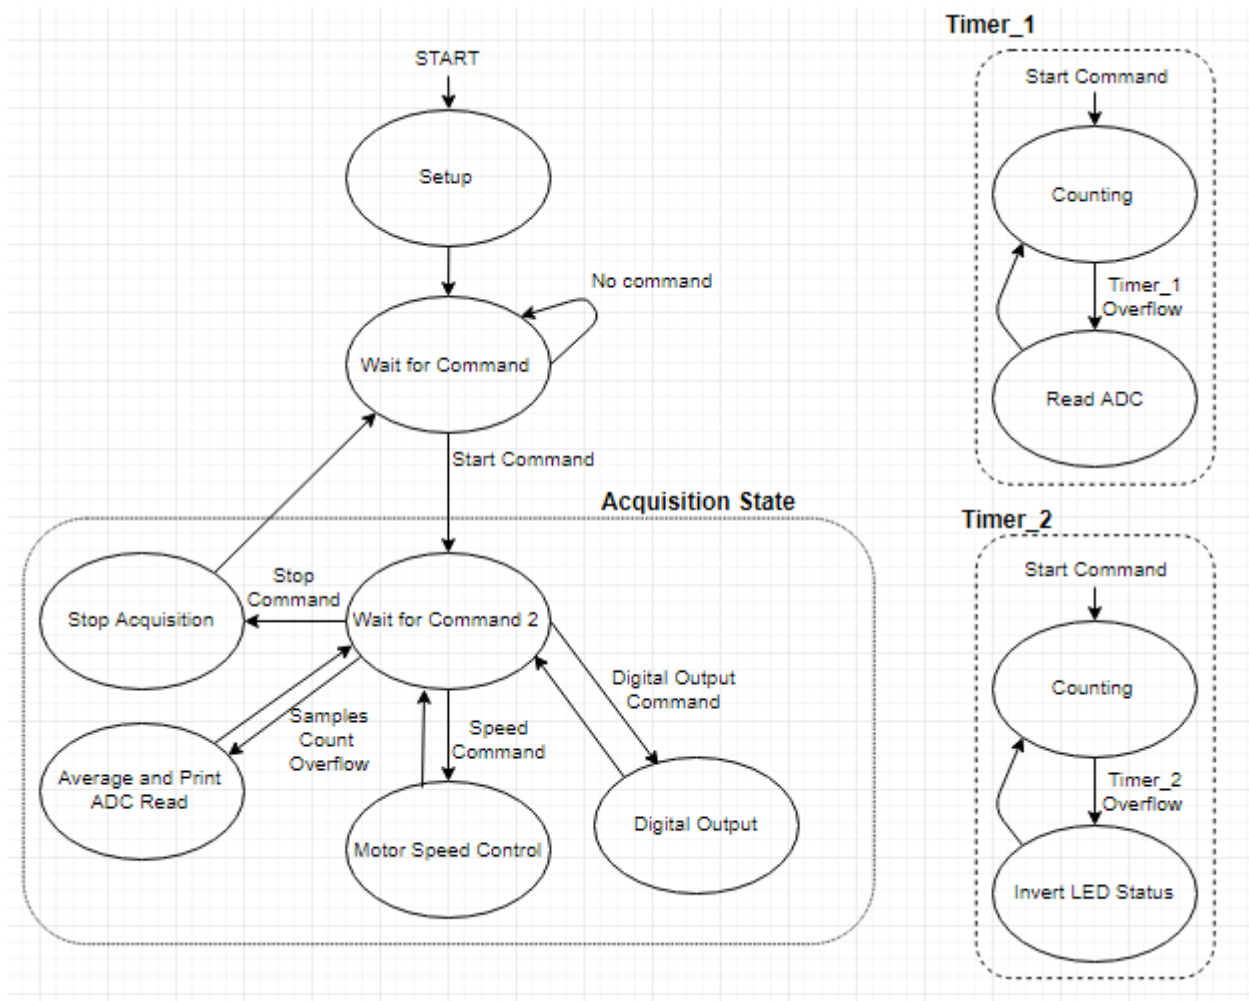


Figura 22 – Microcontroller Code Map (GUIMARAES, 2017b)

As soon as the microcontroller is turned on it enters in the *Setup*, on this part the following things are setted:

- *Timer\_1*: *Timer\_1* max count value is setted and a interruption service routine is appointed.
- *Timer\_2*: Same thing done for *Timer\_1* is done for *Timer\_2*.
- *Serial Port*: The serial port baud rate is defined and the serial port is opened.
- *Port definitions*: The I/O ports are defined as inputs (high impedance) or as outputs (low impedance).

After setting up the code enters in a state in which it waits for a *Start Command* from the computer. This command starts *Timer\_1* and makes the code enter the *Acquisition State*. Everytime *Timer\_1* finishes its count a ISR will be triggered, all the analog inputs will be read (sampled) and stored followed by the timer restarting its counting

process. The *Start Command* also starts *Timer\_2*, this timer operates the same way as *Timer\_1*, the difference is that its ISR will only toggle the acquisition LED state.

In the acquisition state, if a *Digital Output Command* is received the code will decrypt this command (this is actually a group of possible commands) and set the digital outputs according to the decrypted message.

A received *Speed Command* instruction will make the code behave in a similar way than *Digital Output Command*, code will decrypt the command (it also is a group of possible commands) and output a corresponding PWM value in the analog output port in order to control the electric motor speed.

During all the *Acquisition State*, everytime *Timer\_1* ISR does a presettted number of reads, the code makes an average of those reads and will send them through the serial port to the computer. After that the code will reset the number of read samples and start to count samples again. Another useful feature is that during all the *Acquisition State* the code is also continuously reading the microcontroller digital inputs, this inputs are used to detect if a sensor is not connected, if any of the sensors is considered to be disconnected instead of sending the analog reading from the respective sensor input, the code will send a “-1” value to the computer. This way the computer software that the one responsible for treating this event and take the appropriate action.

The code will exit the *Acquisition State* if the computer sends a *Stop Command*. This will also set all digital outputs to a low logic level and will disable both timers interruption service routines. The code will go back to the *Wait for Command* state and wait for a *Start Command* to restart acquisition.

This code architecture was designed in order to make the microcontroller code as simples as possible in order to make execution faster to avoid jeopardizing the real-time constrain. The same code is used during brake tests, during acquisition and any other process. As mentioned before, all the heavy data processing is done by the computer software.

## 6.2 Computer Software

### 6.2.1



# References

ALTER, D. M. *Using PWM Output as a Digital-to-Analog Converter on a TMS320F280x Digital Signal Controller*. [S.l.], 2008. Cited in page 51.

BARTZ, M.; ZHAKSILIKOV, M.; OGAMI, K. Y. *Data driven method and system for monitoring hardware resource usage for programming an electronic device*. [S.l.]: Google Patents, 2004. US Patent 6,785,881. Cited in page 37.

BURGESS, K. *PWM to DC Voltage Conversion*. [S.l.], 2015. Cited in page 53.

CNW. *Volkswagen Gol 1.0 Ficha Técnica*. 2017. Disponível em: <<http://www.carrosnaweb.com.br/fichadetalhe.asp?codigo=1528>>. Cited in page 23.

CNW. *Volkswagen Gol Plus 1.0 Ficha Técnica*. 2017. Disponível em: <<http://www.carrosnaweb.com.br/fichadetalhe.asp?codigo=431>>. Cited in page 23.

COORPORATION, A. *Atmel ATmega328P Datasheet*. 2011. Cited 2 times in page 13 and 46.

COUNTS, L.; KITCHEN, C. A designer's guide to instrumentation amplifiers. In: \_\_\_\_\_. 3. ed. [S.l.]: Analog Devices, 2006. cap. 2, p. 3. Adapted. Cited in page 35.

DESCONHECIDO. *Magnetic Cam Sensor Signal*. 2016. Disponível em: <[http://i287.photobucket.com/albums/ll154/arghx7/LGT\\_engine\\_speed2.jpg](http://i287.photobucket.com/albums/ll154/arghx7/LGT_engine_speed2.jpg)>. Cited 2 times in page 13 and 30.

DESCONHECIDO. *Typical instrumentation amplifier schematic*. 2016. Disponível em: <[https://upload.wikimedia.org/wikipedia/commons/thumb/e/ed/Op-Amp\\_Instrumentation\\_Amplifier.svg/400px-Op-Amp\\_Instrumentation\\_Amplifier.svg.png](https://upload.wikimedia.org/wikipedia/commons/thumb/e/ed/Op-Amp_Instrumentation_Amplifier.svg/400px-Op-Amp_Instrumentation_Amplifier.svg.png)>. Cited 2 times in page 13 and 35.

DORF, R. C.; SVOBODA, J. A. Introduction to electrical circuits. In: \_\_\_\_\_. 8. ed. [S.l.]: LTC, 2014. cap. 6, p. 203. Equation 6.5-1 (b). Cited in page 34.

DORF, R. C.; SVOBODA, J. A. *Introduction to Electrical Circuits*. 8. ed. [S.l.]: LTC, 2014. Cited in page 52.

ECIL. *Medição com Termopares*. 2016. Disponível em: <<http://www.ecil.com.br/imagens/seedback2.jpg>>. Cited 2 times in page 13 and 31.

FERNANDES, J. C. *Segurança nas Vibrações sobre o Corpo Humano*. [S.l.], 2000. 11 p. Cited in page 32.

GARDINALLI, G. J. Comparação do desempenho de frenagem simulada x experimental de um veículo de passeio com freios hidráulicos e abs. *Trabalho de Conclusão de Curso apresentado à Escola Politécnica da Universidade de São Paulo para obtenção do título de Mestre em Engenharia Automotiva*, 2005. Cited in page 23.

GUIMARAES, J. *Brake Test Bench Hardware Project*. 2017. Cited 2 times in page 13 and 45.

GUIMARAES, J. *Brake Test Bench Microcontroller Code Map*. 2017. Cited 2 times in page 13 and 56.

GUIMARAES, J. *Project Problem Depuration*. 2017. Cited 2 times in page 13 and 41.

HALDERMAN, J. D.; MITCHELL, C. D. *Automotive brake systems*. [S.l.]: Prentice Hall, 2016. Cited in page 23.

HERNANDES, D. *Relembre todos os carros que já lideraram as vendas no Brasil em 60 anos de história*. 2017. Disponível em: <<https://www.flatout.com.br/relembre-todos-os-carros-que-ja-lideraram-as-vendas-no-brasil-em-60-anos-de-historia/>>. Cited in page 23.

INMETRO. *Regulamento Técnico da Qualidade para Materiais de Atrito Destinados ao Uso em Freios de Veículos Roviários Automotores*. Rio de Janeiro, Brasil, 2013. 25 p. Cited in page 24.

INSTRUMENTS, N. *Definition of Strain*. 2016. Disponível em: <<http://www.ni.com/cms/images/devzone/tut/a/83a1fe69763.gif>>. Cited 2 times in page 13 and 32.

INSTRUMENTS, N. *Wheatstone Bridge Circuit*. 2016. Disponível em: <<http://www.ni.com/cms/images/devzone/tut/a/a28b553b1069.gif>>. Cited 2 times in page 13 and 32.

INSTRUMENTS, T. *Instrumentation Amplifier, With Precision Voltage Reference*. 1998. Cited 2 times in page 13 and 48.

INSTRUMENTS, T. *INA 118*. 2000. Cited 2 times in page 13 and 36.

INSTRUMENTS, T. *INA118 Precision, Low Power Instrumentation Amplifier*. [S.l.], 2000. 29 p. Cited in page 36.

JR, K. N. Equivalence principle for massive bodies. ii. theory. *Physical Review*, APS, v. 169, n. 5, p. 1017, 1968. Cited in page 32.

KAWAGUCHI, H. Comparação da análise de conforto de frenagem subjetiva x objetiva de um veículo de passeio. São Paulo, Brazil, p. 101, 2005. Cited in page 24.

KEIM, R. *Low-Pass Filter a PWM Signal into an Analog Voltage*. 2016. Disponível em: <<https://www.allaboutcircuits.com/technical-articles/low-pass-filter-a-pwm-signal-into-an-analog-voltage/>>. Cited in page 51.

KELLER, A. Relays and switches. *Proceedings of the IRE*, IEEE, v. 50, n. 5, p. 932–934, 1962. Cited in page 36.

KERNIGHAN, B. W.; RITCHIE, D. M. *The C programming language*. [S.l.: s.n.], 2006. Cited in page 55.

KINZIE, P. A.; RUBIN, L. G. Thermocouple temperature measurement. *Physics Today*, v. 26, p. 52, 1973. Cited in page 31.

MANCINI, R. *Op amps for everyone: design reference*. [S.l.]: Newnes, 2003. Cited in page 33.

- MANDELL, R. L. Hardware/software trade-offs: reasons and directions. In: ACM. *Proceedings of the December 5-7, 1972, fall joint computer conference, part I*. [S.l.], 1972. p. 453–459. Cited in page 27.
- MAZIDI, M. A.; NAIMI, S.; NAIMI, S. *AVR Microcontroller and Embedded Systems: Using Assembly and C*. 1st. ed. Upper Saddle River, NJ, USA: Prentice Hall Press, 2010. ISBN 0138003319, 9780138003319. Cited in page 55.
- METIVIER, R. *Method for Converting a PWM Output to an Analog Output When Using Hall-Effect Sensor ICs*. [S.l.], 2013. Cited 2 times in page 51 and 52.
- METTINGVANRIJN, A.; PEPPER, A.; GRIMBERGEN, C. Amplifiers for bioelectric events: a design with a minimal number of parts. *Medical and Biological Engineering and Computing*, Springer, v. 32, n. 3, p. 305–310, 1994. Cited in page 35.
- MUKARO, R.; CARELSE, X. F. A microcontroller-based data acquisition system for solar radiation and environmental monitoring. *IEEE transactions on instrumentation and measurement*, IEEE, v. 48, n. 6, p. 1232–1238, 1999. Cited in page 55.
- NICE, K. *How Disc Brakes Work*. 2017. Disponível em: <<https://s.hswstatic.com/gif/disc-brake3.jpg>>. Cited 2 times in page 13 and 29.
- OMEGATRON. *Op-amp pinouts*. 2007. Cited 2 times in page 13 and 33.
- PATRICK, W. L. The history of the accelerometer: 1920s-1996 - prologue and epilogue. Ft. Worth - Texas, Estados Unidos da América, p. 9, 2007. Cited in page 33.
- POLLOCK, D. D. *Thermocouples: theory and properties*. [S.l.]: CRC press, 1991. Cited in page 30.
- REMAN, M. C. *GM Replacement 10456042 Crankshaft Position Sensor*. 2016. Disponível em: <<http://ep.yimg.com/ay/motorcityreman/general-motors-oe-10456042-crankshaft-position-sensor-1.gif>>. Cited 2 times in page 13 and 29.
- ROUSE, M. *microcontroller*. 2012. Disponível em: <<http://internetofthingsagenda.techtarget.com/definition/microcontroller>>. Cited in page 37.
- SAE. *Dynamometer Global Brake Effectiveness*. Rio de Janeiro, Brasil, 2003. 18 p. Cited in page 28.
- SAE. *SAE*. 2016. Disponível em: <<http://www.sae.org/>>. Cited 3 times in page 24, 25, and 41.
- SALURI, O. *Op-amp inverting amplifier circuit*. 2009. Cited 2 times in page 13 and 34.
- SCHROEDER, T. *Crankshaft position sensor*. [S.l.]: Google Patents, 2002. US Patent 6,346,808. Cited in page 29.
- SHREE, V. *What is Instrumentation Engineering? Scope and Career Opportunities*. 2016. Disponível em: <<https://www.careerindia.com/courses/unique-courses/what-is-instrumentation-engineering-scope-and-career-opportunities-015486.html>>. Cited in page 27.

- TESCHLER, L. *Typical Simplified Eletromechanical Relay Schematic*. 2016. Disponível em: <[http://machinedesign.com/site-files/machinedesign.com/files/uploads/2014/07/relay\\_diagram.gif](http://machinedesign.com/site-files/machinedesign.com/files/uploads/2014/07/relay_diagram.gif)>. Cited 2 times in page 13 and 37.
- TEXAS INSTRUMENTS. *Analysis of the Sallen-Key Architecture*. Dallas, Texas 75265, 1999. Cited 4 times in page 13, 52, 53, and 54.
- THOMSEN, A. et al. *Application of a conditionally stable instrumentation amplifier to industrial measurement*. [S.l.]: Google Patents, 2003. US Patent 6,525,589. Cited in page 35.
- UK, M. O. *Compression Accelerometer*. 2016. Disponível em: <[http://www.maintenanceonline.co.uk/maintenanceonline/content\\_images/figure-2\(1\).jpg](http://www.maintenanceonline.co.uk/maintenanceonline/content_images/figure-2(1).jpg)>. Cited 2 times in page 13 and 33.
- UNKWNON. *Curva de Variação da F.E.M dos Termopares*. 2016. Disponível em: <[http://www.termopares.com.br/teoria\\_sensores\\_temperatura\\_termopares\\_curvas\\_variacao\\_fem/curvas.gif](http://www.termopares.com.br/teoria_sensores_temperatura_termopares_curvas_variacao_fem/curvas.gif)>. Cited 2 times in page 13 and 30.
- WAIT, J. V.; HUELSMAN, L. P.; KORN, G. A. *Introduction to operational amplifier theory and applications*. [S.l.]: McGraw-Hill Companies, 1975. Cited in page 35.
- WALSH, A. *Protecting ADC Inputs*. [S.l.], 2017. Cited in page 54.
- WEBSTER, J. G.; EREN, H. *Measurement, instrumentation, and sensors handbook: spatial, mechanical, thermal, and radiation measurement*. [S.l.]: CRC press, 2014. v. 1. Cited in page 27.
- WEG. *CFW-08 Frequency Inverter*. [S.l.], 2009. Cited in page 50.
- WEG. *WEG CFW08 Frequency Inverter*. 2017. Disponível em: <[http://ecatalog.weg.net/files/produtos/CFW-08\\_G.jpg](http://ecatalog.weg.net/files/produtos/CFW-08_G.jpg)>. Cited 2 times in page 13 and 50.
- WINDOW, A. L.; HOLISTER, G. S. et al. *Strain gauge technology*. [S.l.]: Applied science publishers, 1982. Cited in page 31.
- YOU, E. F. *Instrumentation and Control Engineering is for Perfectionists*. 2012. Disponível em: <<http://electronicsforu.com/resources/instrumentation-control-engineering-perfectionists>>. Cited in page 27.



# Appendix



# APPENDIX A – First Appendix

## A.1 Micontroller Code

```

//Libraries
#include <TimerOne.h>
#include <MsTimer2.h>
#include <math.h>

//HW DEFINITIONS
//Digital ports
///inputs
#define ADC_CON_0                2
#define ADC_CON_1                3
#define ADC_CON_2                4
#define ADC_CON_3                6
#define ADC_CON_4                7
#define ADC_CON_5                8
///outputs
#define DIG_OUT_PORT_0           9
#define DIG_OUT_PORT_1          10
#define RELAY_OUT_0              11
#define RELAY_OUT_1              12
#define ACQ_LED                  13

//Analog Ports
#define PWM_OUT                   5

//COMMUNICATIONS DEFINITIONS
#define START_ACQ_BYTE           21
#define STOP_ACQ_BYTE            22
#define MASTER_RESET_BYTE        23
#define NULL_DIGITAL_BYTE        96
#define MAX_DIGITAL_BYTE         111
#define NULL_SPEED_BYTE          155

```

```

#define MAX_SPEED_BYTE                255

//GENERAL DEFINITIONS
#define SET                            1
#define RESET                          0
#define ACQ_LED_BLINK_MS              250
#define SAMPLE_RATE                    10
#define NUMBER_OF_SAMPLES             100

//GLOBAL VARS
static boolean acquisitionEnabled=false;
int samples=RESET;
short DIGITAL_OUT_PORTS[]={DIG_OUT_PORT_0,DIG_OUT_PORT_1,RELAY_OUT_0,RELAY_OUT_1};
short DIGITAL_IN_PORTS[]={ADC_CON_0,ADC_CON_1,ADC_CON_2,ADC_CON_3};

boolean digitalInstruction[]={RESET,RESET,RESET,RESET};
static float sensorData[]={RESET,RESET,RESET,RESET,RESET,RESET,RESET,RESET,RESET,RESET};

//Function to write to digital ports
void digitalOutputControl(){
    for(int i=RESET;i<NUMBER_OF_DIGITAL_PORTS;i++){
        digitalWrite(DIGITAL_OUT_PORTS[i],digitalInstruction[i]);
    }
}

//Function to set all digital outputs to low
void resetDigOutputs(){
    for(int i=RESET;i<NUMBER_OF_DIGITAL_PORTS;i++){
        digitalInstruction[i]=RESET;
    }
    digitalOutputControl();
}

//Function to configure Timer 0 – PWM-OUT
void configureTimer0(){
    TCCR0B = (TCCR0B & 0b11111000) | 0x01;

```

```

}

//Function to configure Timer 1 – ACQUISITION
void configureTimer1(){
    Timer1.attachInterrupt(timer1_OISR);
    Timer1.initialize(SAMPLE_RATE);
    Timer1.stop();
}

//Function to configure timer 2 – LED
void configureTimer2() {
    MsTimer2::set(ACQ_LED_BLINK_MS, timer2_OISR);
}

//Timer 1 overflow interruption routine
void timer1_OISR(){
    if (samples<NUMBER_OF_SAMPLES){
        if(enableAcquisition==true){
            //Lendo dado analogico
            sensorData[0]=sensorData[0]+analogRead(A0);
            sensorData[1]=sensorData[1]+analogRead(A1);
            sensorData[2]=sensorData[2]+analogRead(A2);
            sensorData[3]=sensorData[3]+analogRead(A3);
            sensorData[4]=sensorData[4]+analogRead(A4);
            sensorData[5]=sensorData[5]+analogRead(A5);
            samples++;
        }
    }
}

//Timer 1 overflow interruption routine
void timer2_OISR(){
    if(enableAcquisition){
        digitalWrite(ACQ_LED_PIN, digitalRead(ACQ_LED_PIN));
    }else{
        digitalWrite(ACQ_LED_PIN, LOW);
    }
}

```

```

//Function to write adc results in serial port
void printResults(int * result){
    Serial.print(result[0]);
    Serial.print(",");
    Serial.print(result[1]);
    Serial.print(",");
    Serial.print(result[2]);
    Serial.print(",");
    Serial.print(result[3]);
    Serial.print(",");
    Serial.print(result[4]);
    Serial.print(",");
    Serial.print(result[5]);
    Serial.print(".");
}

void IOsetup(){
    pinMode(ACQ_LED_PIN,OUTPUT);

    for (int i=0;i<6;i++){
        if (i<4){
            pinMode(DIGITAL_OUT_PORTS[i],OUTPUT)
        }
        pinMode(DIGITAL_IN_PORTS[i],INPUT);
    }

}

void setup(){
    Serial.begin(9600);
    IOsetup();
    digitalWrite(ACQ_LED_PIN,LOW);

    configureTimer0();
    configureTimer1();
    configureTimer2();
    MsTimer2::start();
}

```

```
void loop(){
    if (samples>=NUMBER_OF_SAMPLES){
        Timer1.stop();
        static int resultAcq[6];

        for(int k=0;k<6;k++){
            resultAcq[counter] = (int)roundf(
                sensorData[counter]=RESET;
            )
        }
        samples=RESET;
        Timer1.restart();

        printResults(resultAcq);
    }

    if (Serial.available()){

        char.byteRead = Serial.read();

        switch(byteRead){

            case START_ACQ_BYTE:{
                if (!acquisitionEnabled){
                    acquisitionEnabled=true;
                    samples=RESET;
                    Timer1.restart();
                }
            }
            break;

            case STOP_ACQ_BYTE:{
                acquisitionStop();
            }
            break;

            case MASTER_RESET_BYTE:{
                acquisitionStop();
                resetDigOutputs();
            }
        }
    }
}
```

```

        break;

    default:{
        if (byteRead>=NULL_SPEED_BYTE){
            unsigned char speed_byte = byteRead;
            speed_byte-=NULL_SPEED_BYTE;
            int speed=RESET;
            speed = 1023*speed_byte/(MAX_SPEED_BYTE);
            analogWrite(PWM_OUT,speed);

        }else if ((byteRead>=NULL_DIGITAL_BYTE) && (byteRead<MAX_DIGITAL_BYTE)){
            for (int i = 3; i>=1; i--) {
                digitalWrite(PIN_1,i);
            }
            digitalWrite(PIN_2,1);
        }
    }
    break;
}
}
}

```