


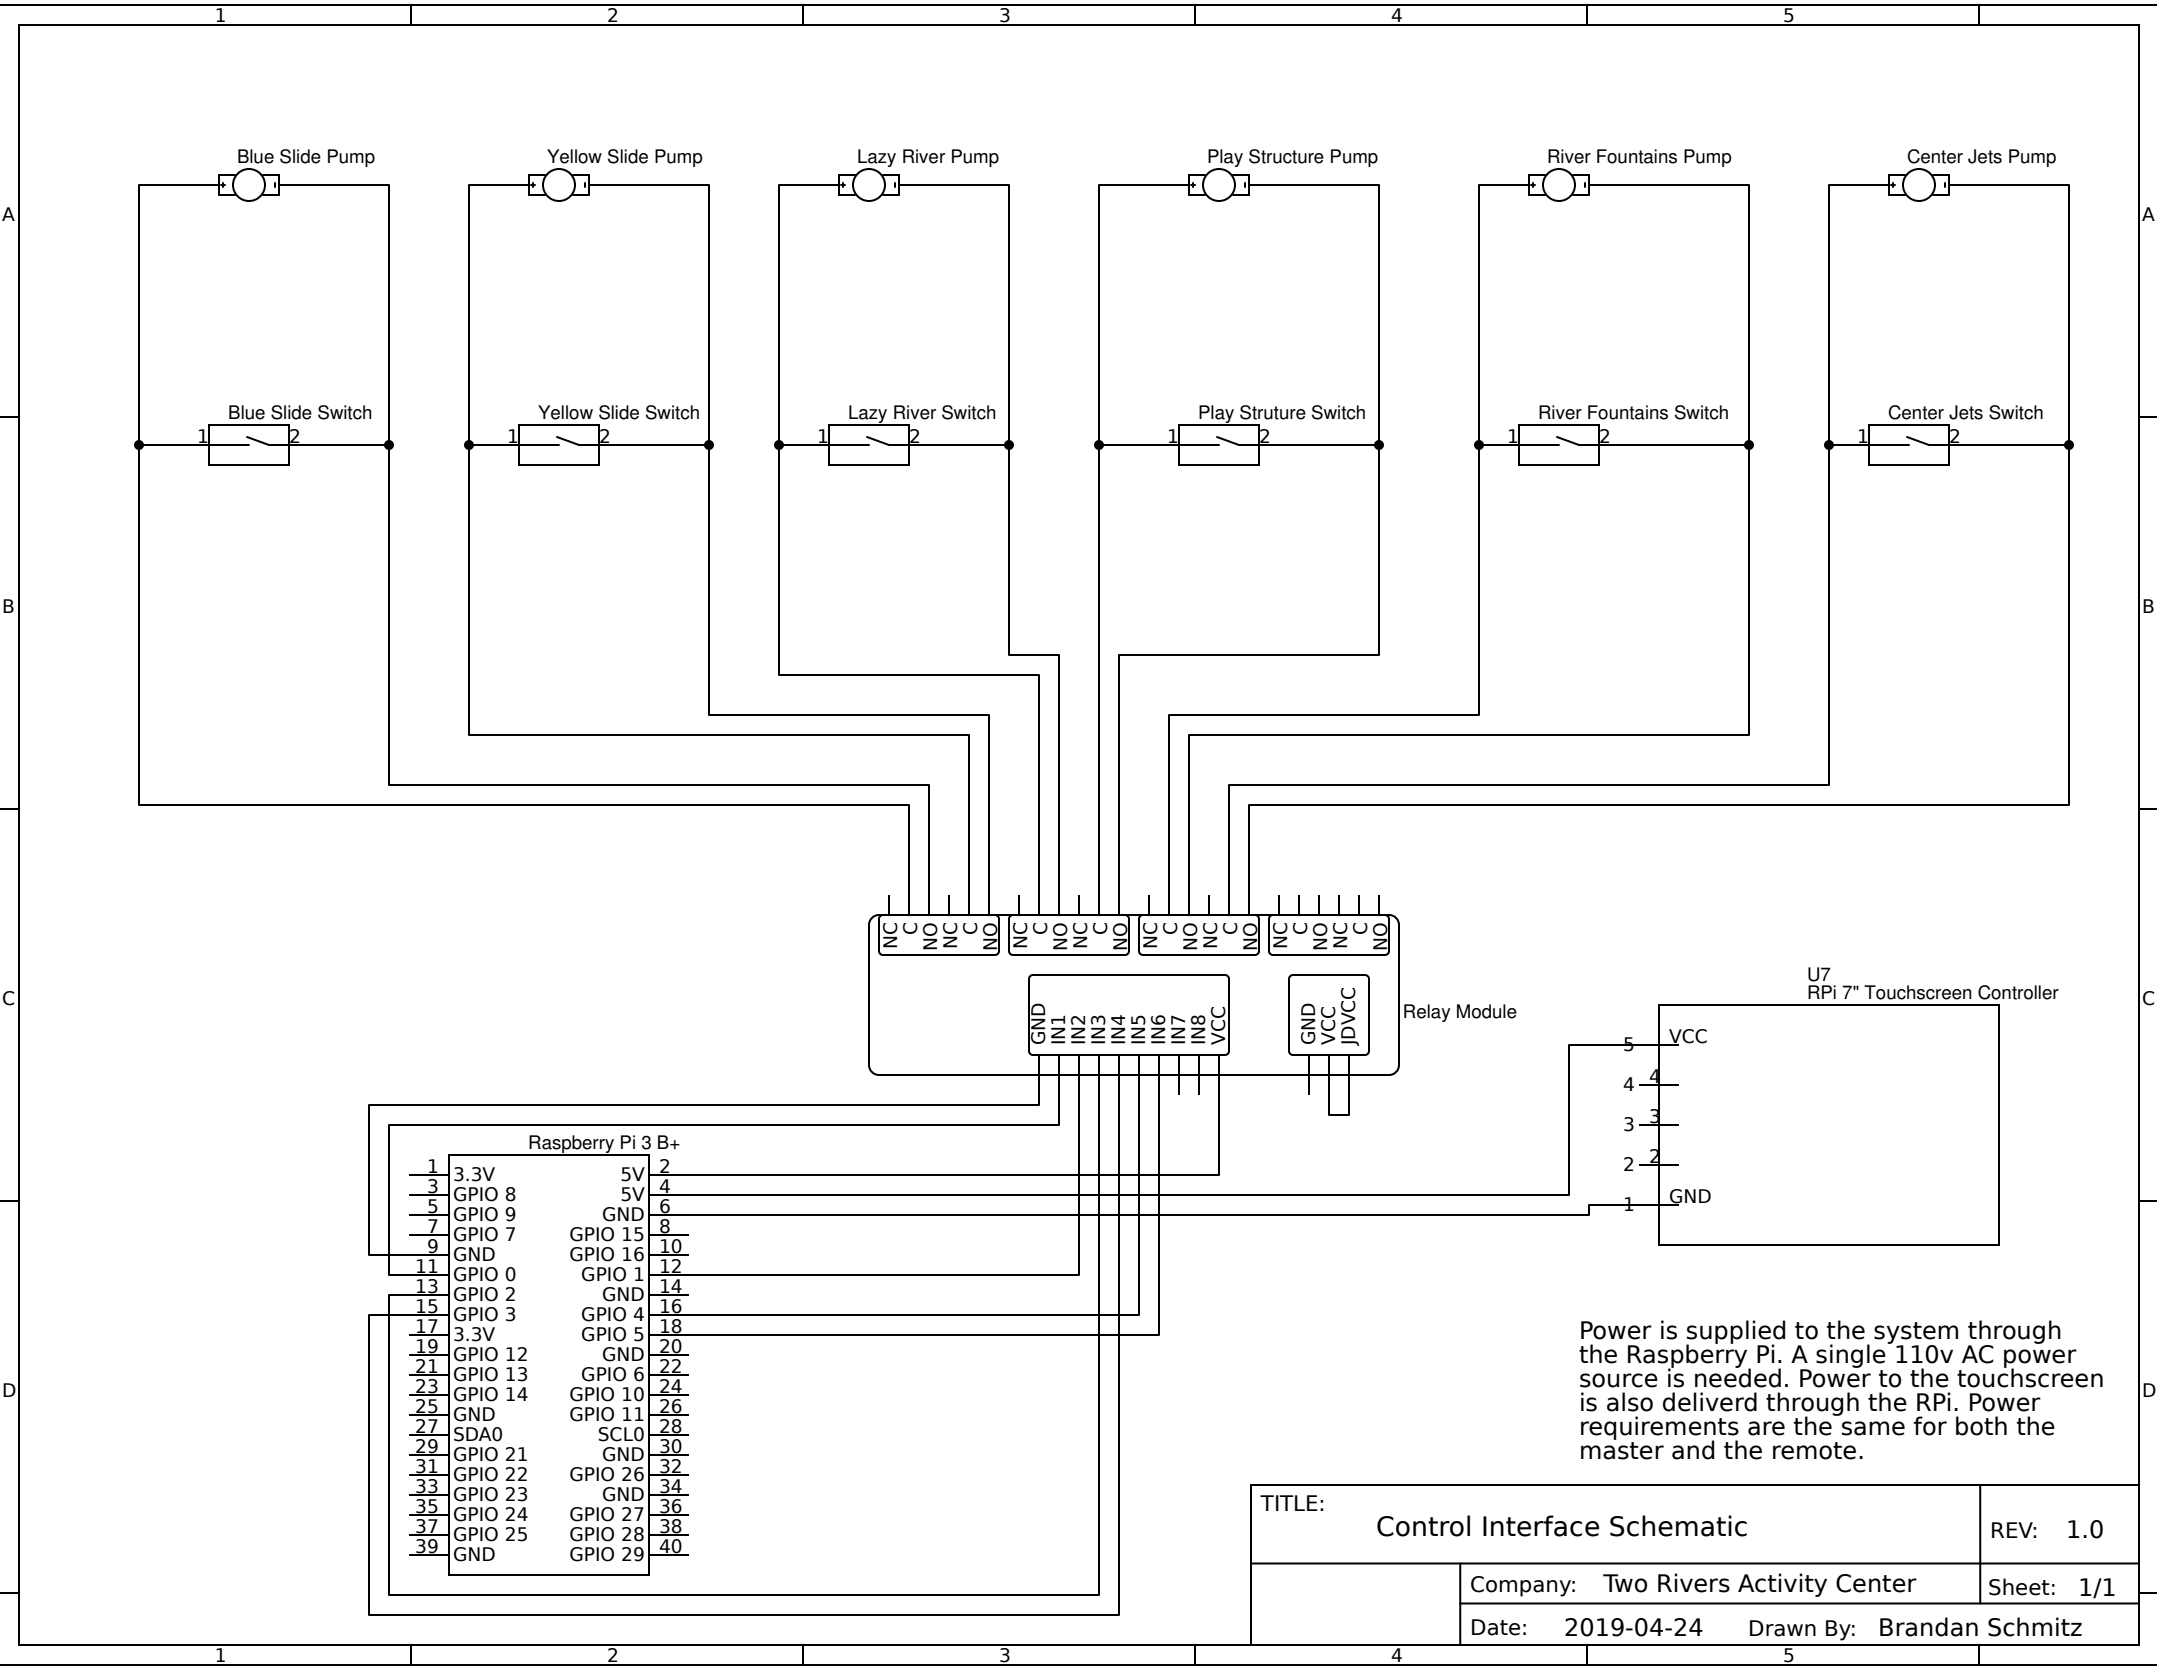

Power is supplied to the system through the Raspberry Pi. A single 110v AC power source is needed. Power to the touchscreen is also delivered through the RPi. Power requirements are the same for both the master and the remote.

TITLE: Control Interface Schematic		REV: 1.0
Company: Two Rivers Activity Center		Sheet: 1/1
Date: 2019-04-24	Drawn By: Brandan Schmitz	