



The company develops zero-point quick-change systems, produces and sells various types of precision vises, zero-point fixtures, self-centering vises, zero-point positioning systems, three-four-five-axis professional fixtures, multi-station vises, multi-station reference seats, etc.

ZPPCNC

Zero Point Prince




ZERO POINT PRINCE

Innovation · Development · Cooperation · Vwin-win

CATALOGUE >>>

Introduction	03
Pneumatic zero point plate AR series	09
Manual Zero Point Plate 52 Series	10
Manual Zero Point Plate 96 Series	16
Self-centering vise	25
Pneumatic self-centering vise	30
ER Zero Point Chuck	32
4axis L Plate	34
Modular Combination	35
3 Jaws Series	37
Run_out Tester	38

ZERO POINT PRINCE INTRODUCTION

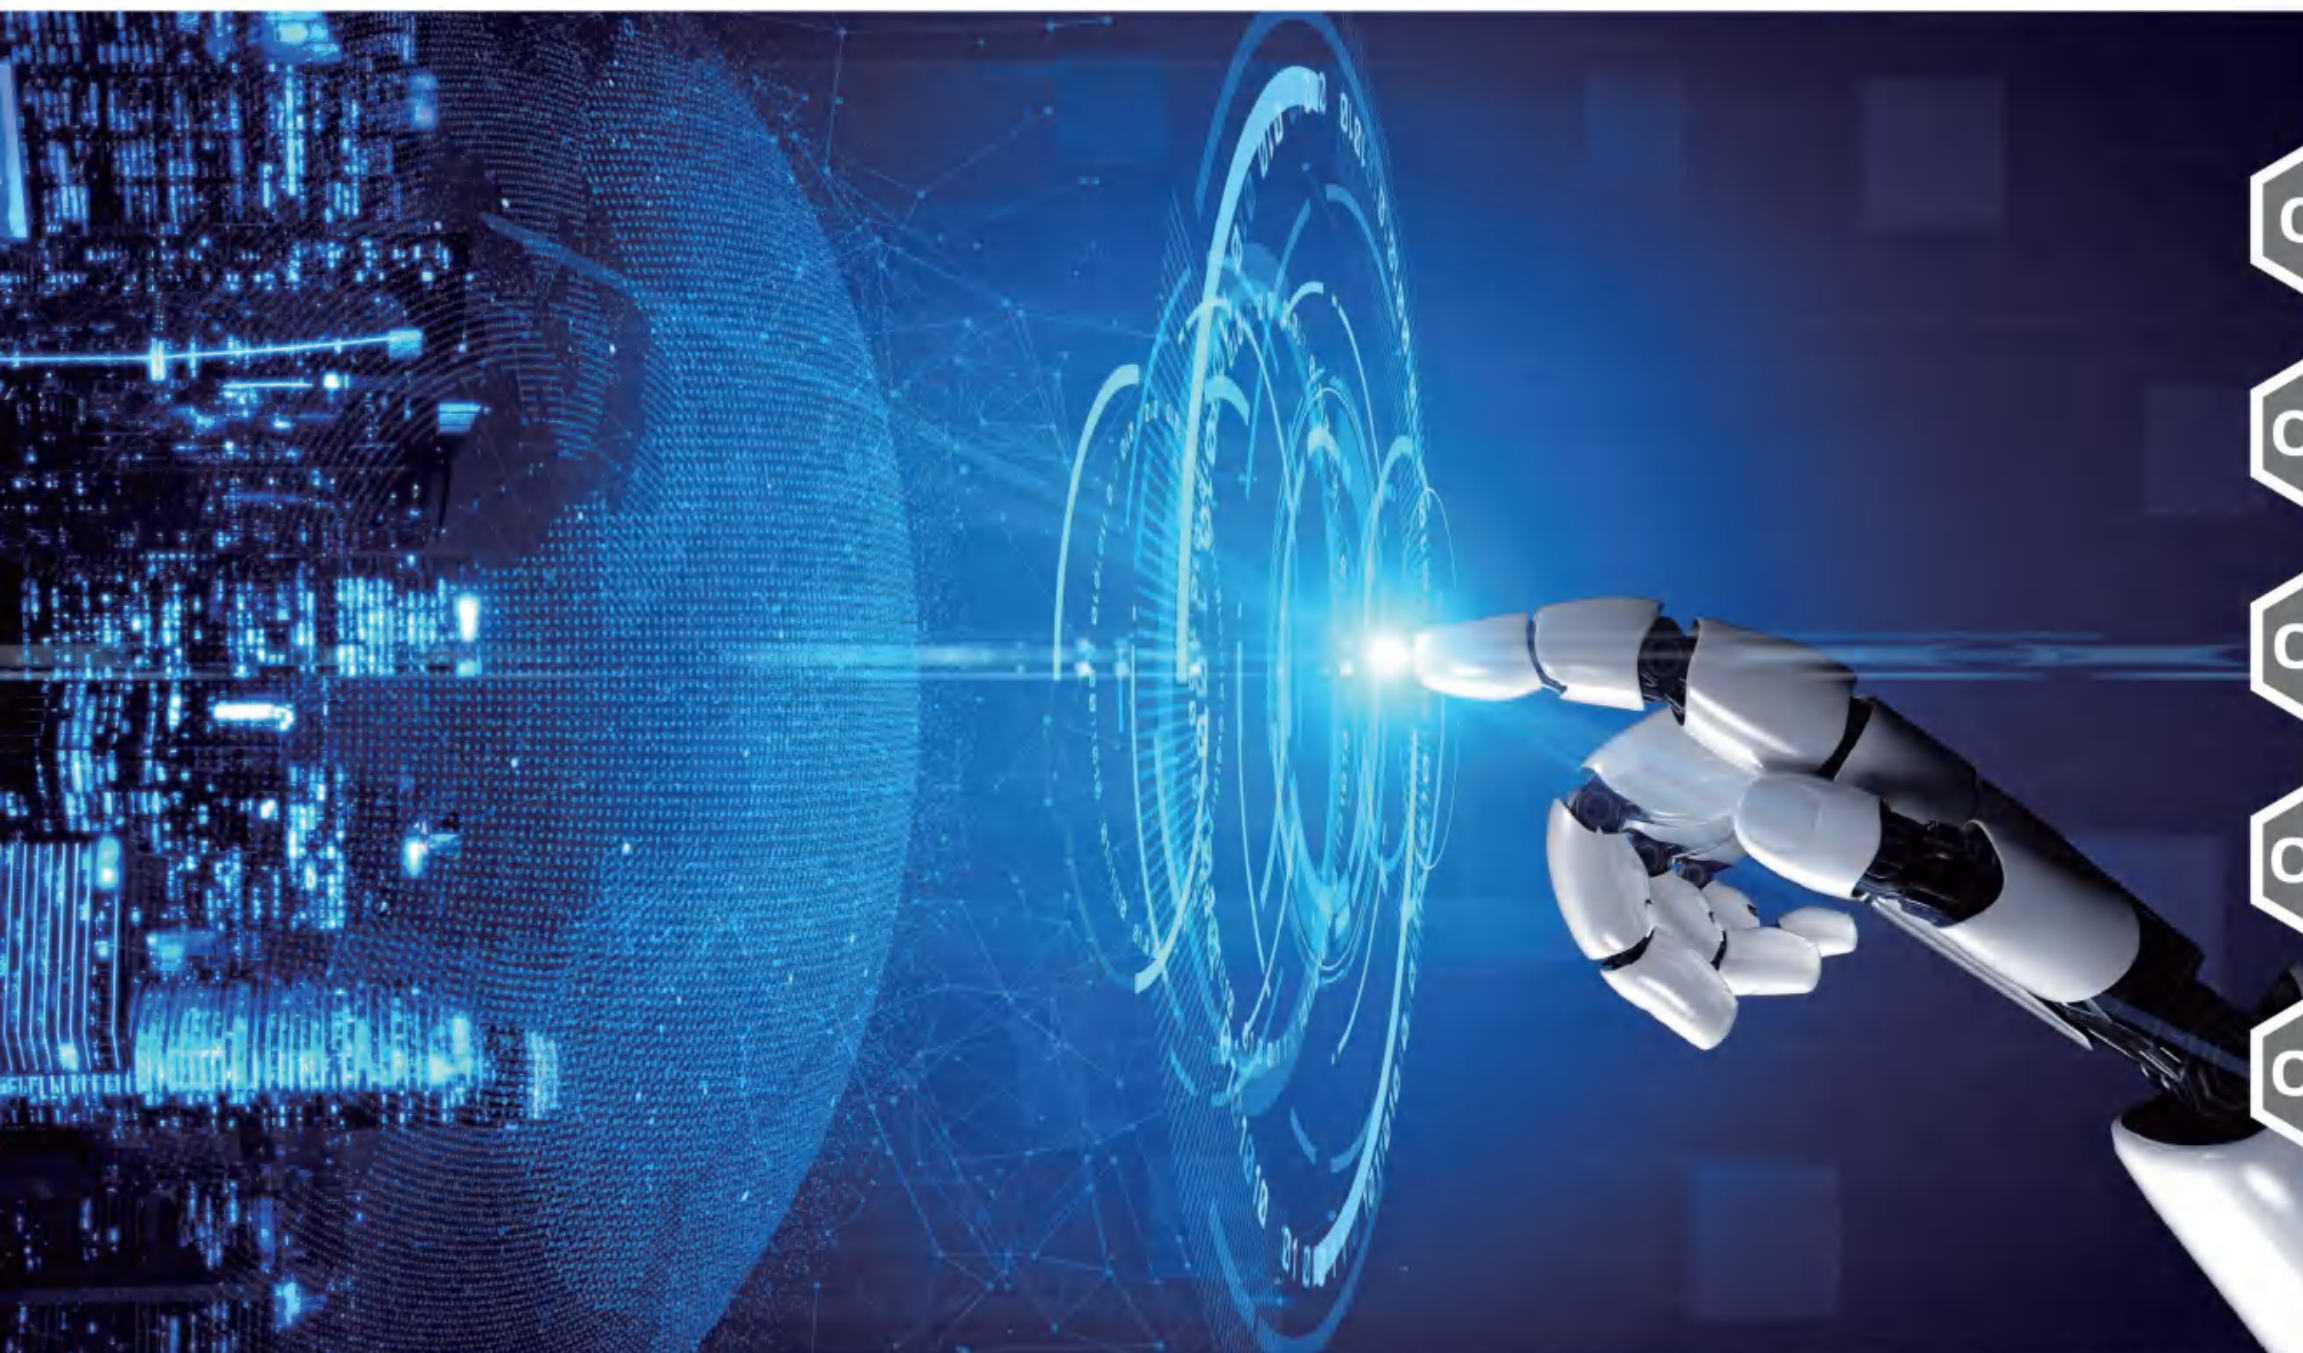

01

Automobile manufacturing

02

Hardware processing

03

Aviation industry

04

Mechanical engineering

05

3C INDUSTRY

MODULAR INSTALLATION >>>

Three-axis, four-axis and five-axis high-precision zero-point fixtures can be compatible with quick-assembly L-bridge plates, self-centering vises, ER collet holders, three-jaw chucks, dovetail clamps, all kinds of self-made fixtures, etc to achieve quickchange and quick assembly, reduce the preparation time of the machine, and ensure extremely high precision in the repeated clamping and changing processes of the product, which is an upgraded version of the traditional processing technology, and the product efficiency and quality are significantly improved



96MM/52MM HOLE SPACING ZERO POINT FIXTURE SYSTEM



QUICK OPERATION | FLEXIBLE SWITCHING | PRECISE POSITIONING

THE ZERO-POINT QUICK-CHANGE SYSTEM IS USED TO INCREASE THE CLAMPING STATION OF THE CNC MACHINE
TO IMPROVE THE MACHINING CAPACITY AND REDUCE DOWNTIME

ZERO POINT PLATE DESCRIPTION >>>



- | | |
|------------------------------|---|
| 01 Datum holes | 02 Locating holes |
| 03 Install dust cover | 04 Cam |
| 05 Drive screw | 06 Hardened stainless steel base |

Pneumatic zero point plate


AR series

AR52-108 >>>

Pneumatic Zero Point Quick Change Plate (Type 52)



Size: 108*108*50mm
 Material: Hardened stainless steel
 Weight: 3.3kg
 Bolt: 4-M10
 Locking force: 12KN@7bar

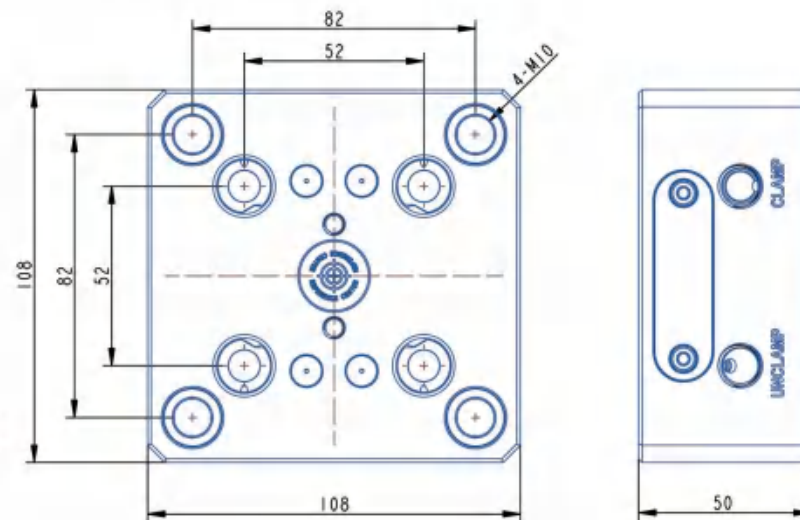


AR96-155 >>>

Pneumatic Zero Point Quick Change Plate (Type 96)



Size: 155*155*55mm
 Material: Hardened stainless steel
 Weight: 7.9kg
 Bolt: 4-M10
 Locking force: 22KN

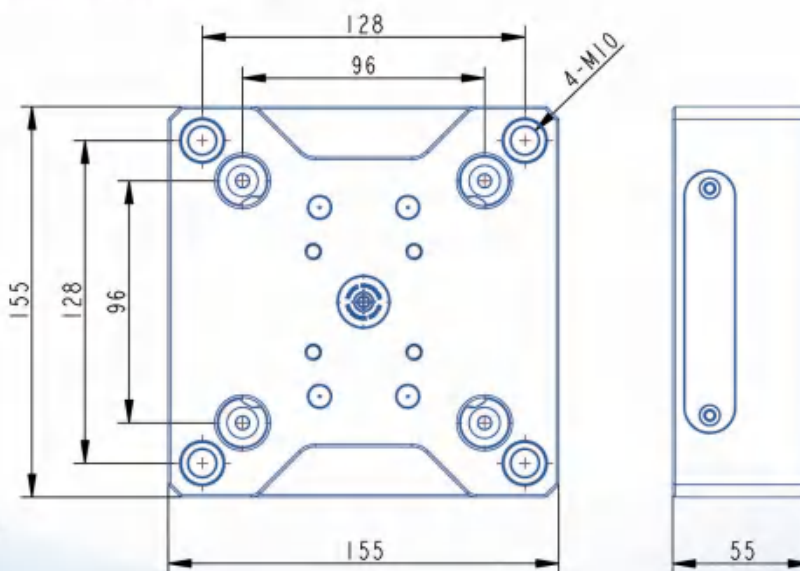

Manual Zero Point Plate


TS52 Series

TS52-120 >>>

Circular zero point quick-change plate



Size: D120*25mm
 Material: Hardened stainless steel
 Weight: 1.7kg
 Bolt: 4-M10
 Locking force: 18KN

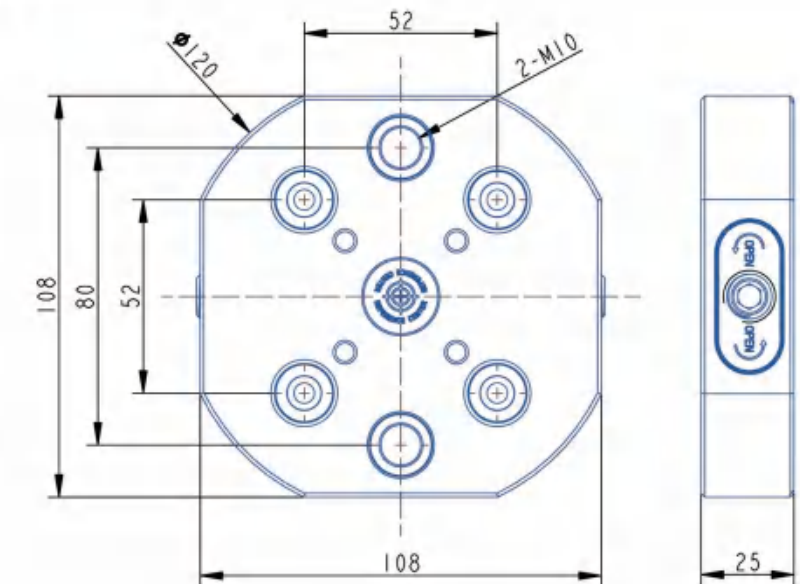


TS52-170 >>>

Circular zero point quick-change plate



Size: D170*25mm
 Material: Hardened stainless steel
 Weight: 3.7kg
 Bolt: 6-M10
 Locking force: 18KN@7bar

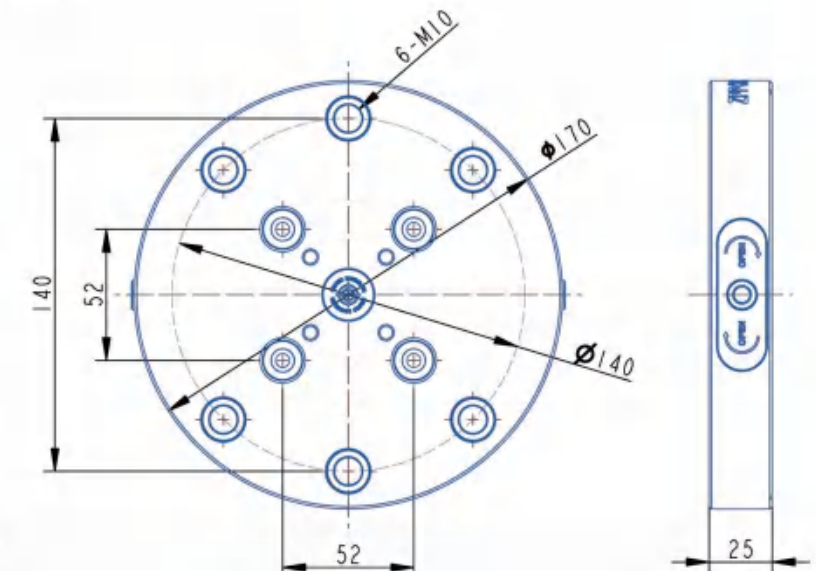

Manual Zero Point Plate


TS52 Series

TS52-108 >>>

Square zero point quick-change plate



Size: 108*108*25mm
 Material: Hardened stainless steel
 Weight: 1.9kg
 Bolt: 4-M10
 Locking force: 18KN

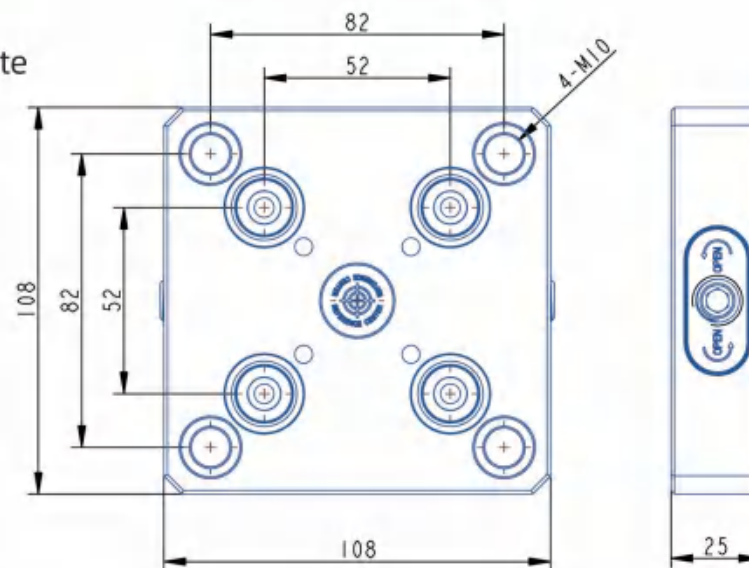


TS52-96 >>>

52mm to 96mm Conversion plate



Size: 125*125*25mm
 Material: Hardened stainless steel
 Weight: 2.5kg
 Bolt: 4-M10
 Locking force: 18KN

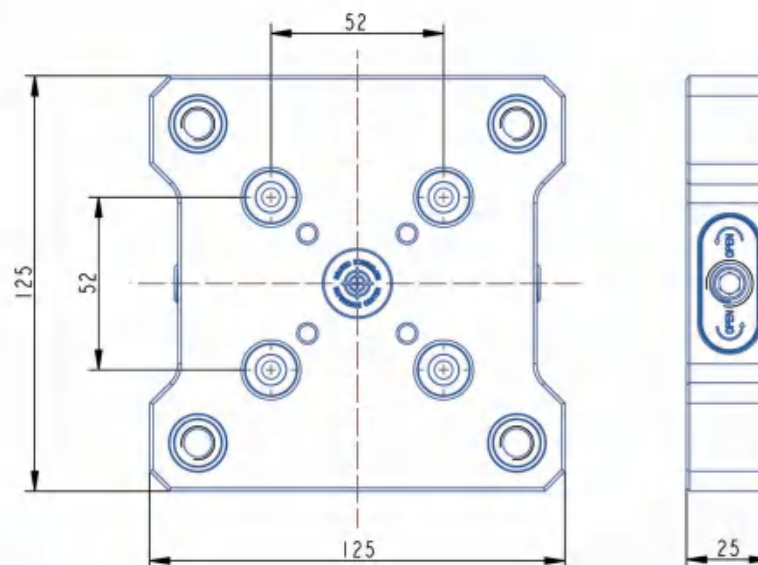

Manual Zero Point Plate


TS/TA52 Series

TS52-210 >>>

Multi-slation zero point quick change plate



Size: 210*108*25mm
 Material: Hardened stainless steel
 Weight: 3.6kg
 Bolt: 4-M10
 Locking force: 18KN

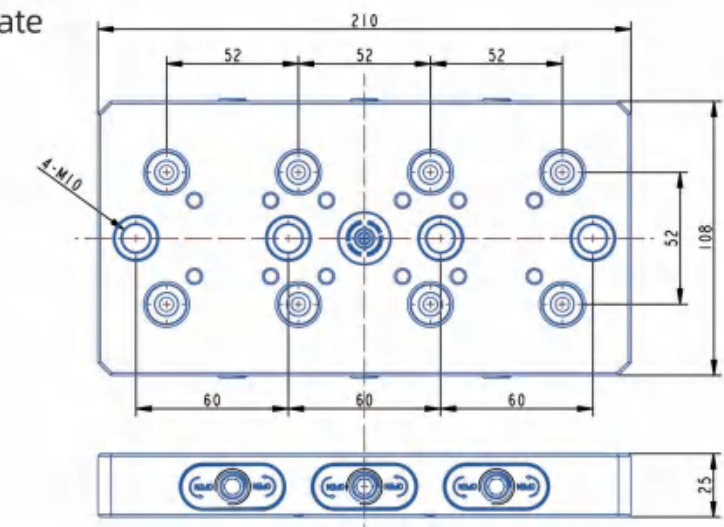


TA52-108 >>>

Square zero point quick change plate (aluminum)



Size: 108*108*25mm
 Material: Hardened aluminium + ring
 Weight: 1.1kg
 Bolt: 4-M10
 Locking force: 17KN

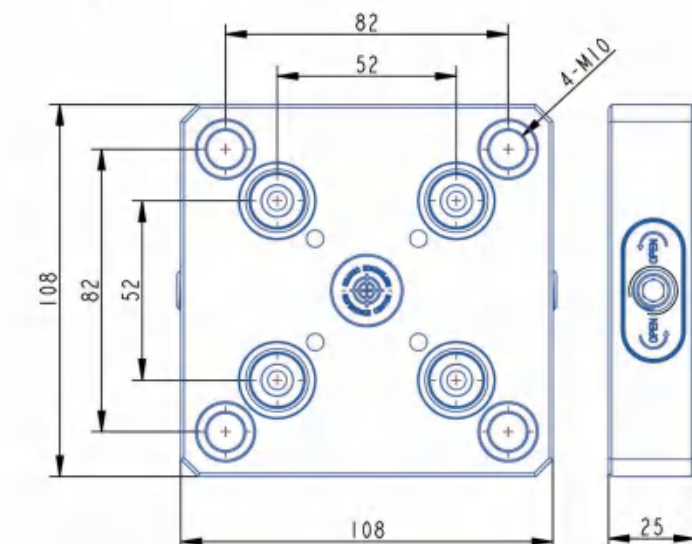


Zero Point Pyramid

TS52 Series

TS52-215 >>>

Zero Point Tower (Type 52)

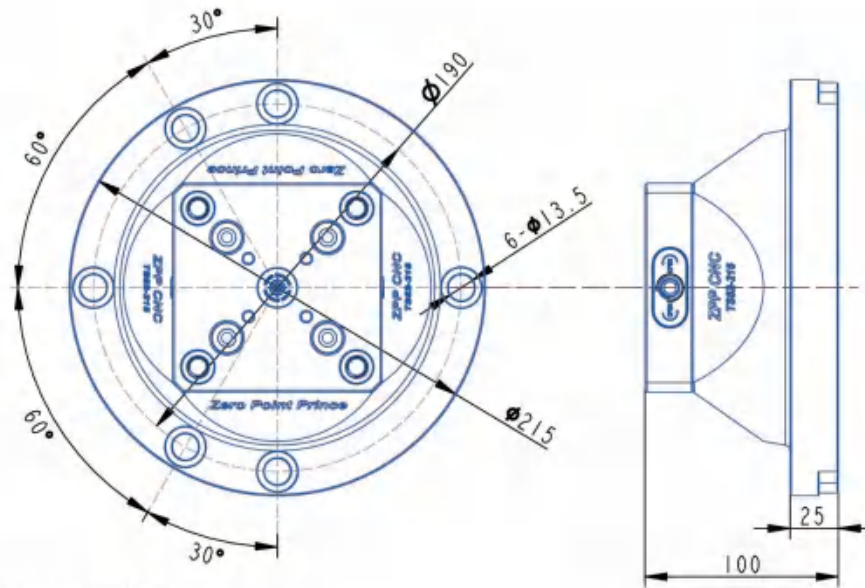

Size: D215*100mm

Material: Aluminum + hardened stainless steel


Weight: 6.8kg

Bolt: 6-M12

Locking force: 18KN

TS52-9052 >>>

0-90° Zero Point Workholding (Type 52)

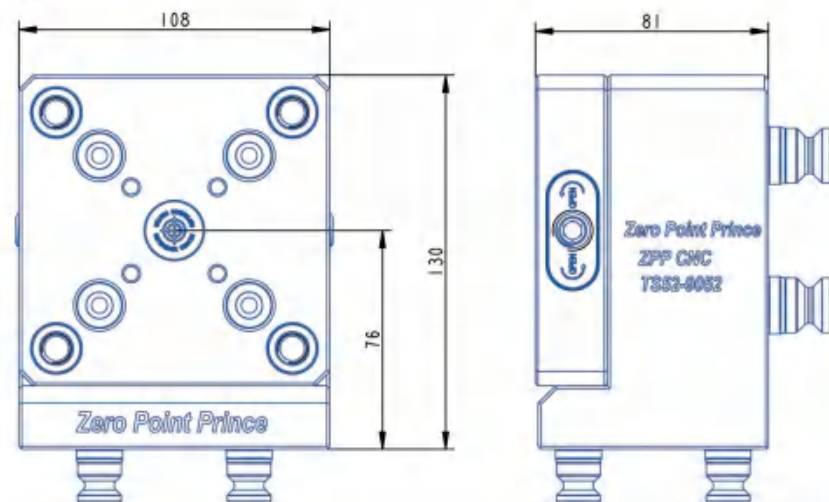

Size: 130*108*81mm

Material: Aluminum + hardened stainless steel

Weight: 4.3kg

Locking force: 18KN


Locking method: 52pull studs

Zero Point Workholding

TS52 Series

TS52-0090 >>>

0-90° Zero Point Workholding (Type 52)

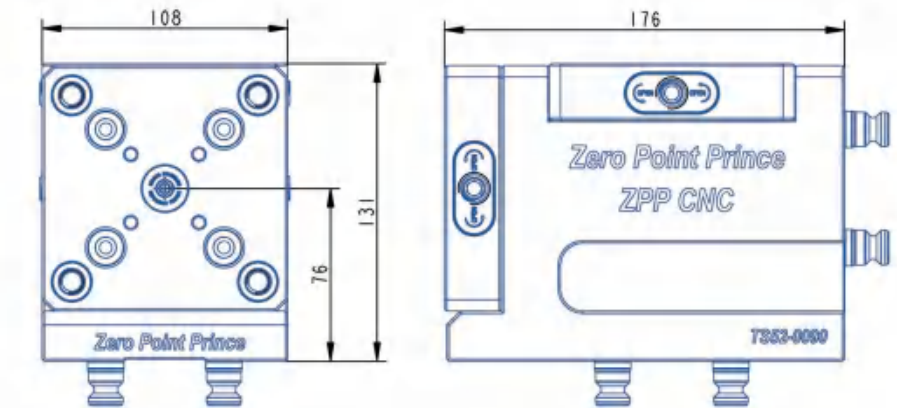

Size: 176*131*108mm

Material: Aluminum + hardened stainless steel


Weight: 8.8kg

Locking force: 18KN

Locking method: 52pull studs

TS52-9096 >>>

90° Zero Point Workholding (Type 52)

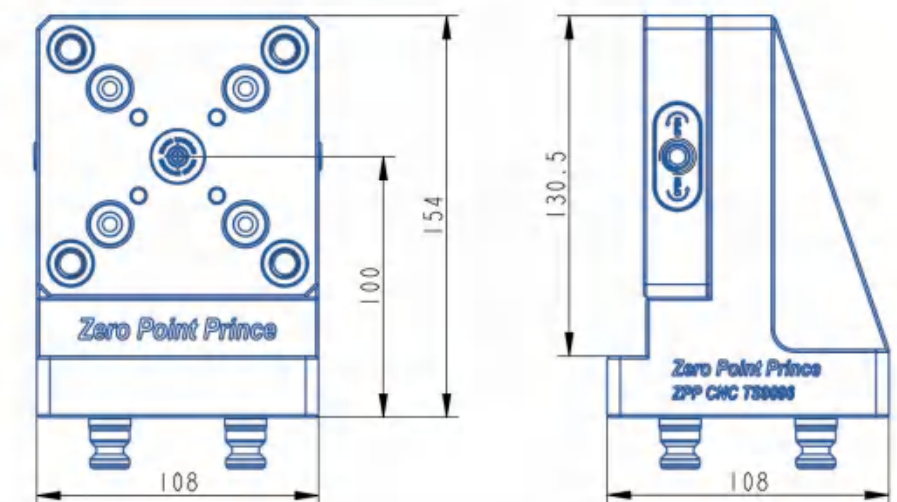

Size: 154*108*108mm

Material: Aluminum + hardened stainless steel

Weight: 4.2kg



Locking force: 18KN

Locking method: 52pull studs

Zero point Rotation Base TS52 Series

TS52-120R >>>

0-90° Zero Swivel Seat (Type 52)

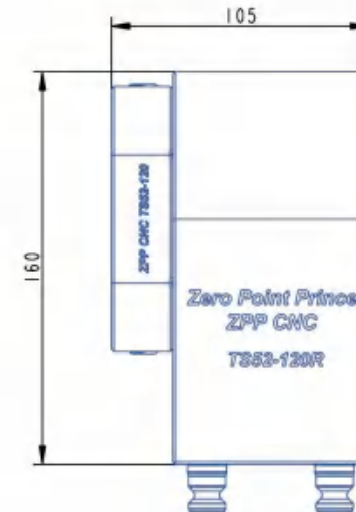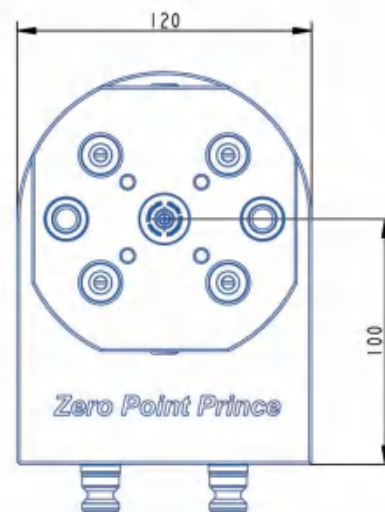

Size: 160*120*105mm

Material: Aluminum + hardened stainless steel

Weight: 7.2kg

Locking force: 18KN


Locking method: 52pull studs



Manual Zero Point Plate TS96 Series

TS96-185 >>>

Circular zero point quick-change plate

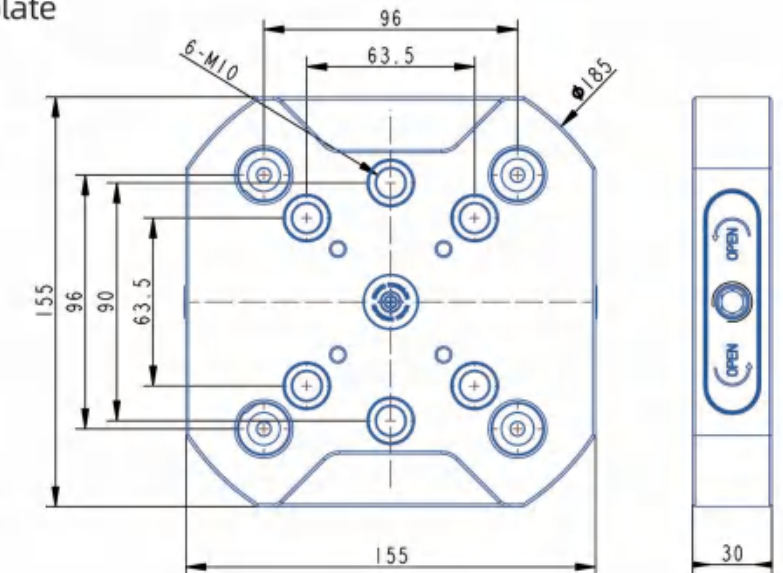

Size: D185*30mm

Material: Hardened stainless steel


Weight: 4.4kg

Bolt: 6-M10

Locking force: 22KN

TS96-200 >>>

Circular zero point quick-change plate

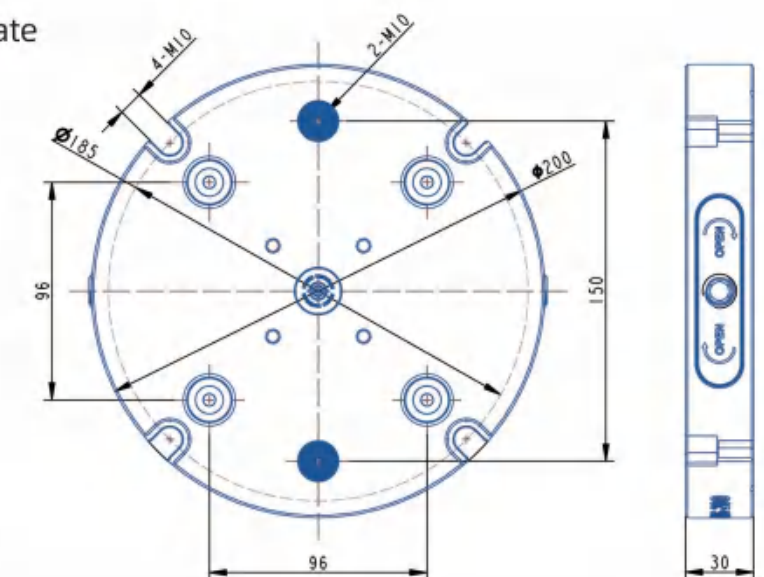

Size: D200*30mm

Material: Hardened stainless steel

Weight: 6.5kg

Bolt: 2-M10

Locking force: 20KN

Manual Zero Point Plate


TS96 Series

TS96-155 >>>

Square zero point quick-change plate



Size: 155*155*30mm
 Material: Hardened stainless steel
 Weight: 4.8kg
 Bolt: 6-M10
 Locking force: 22KN

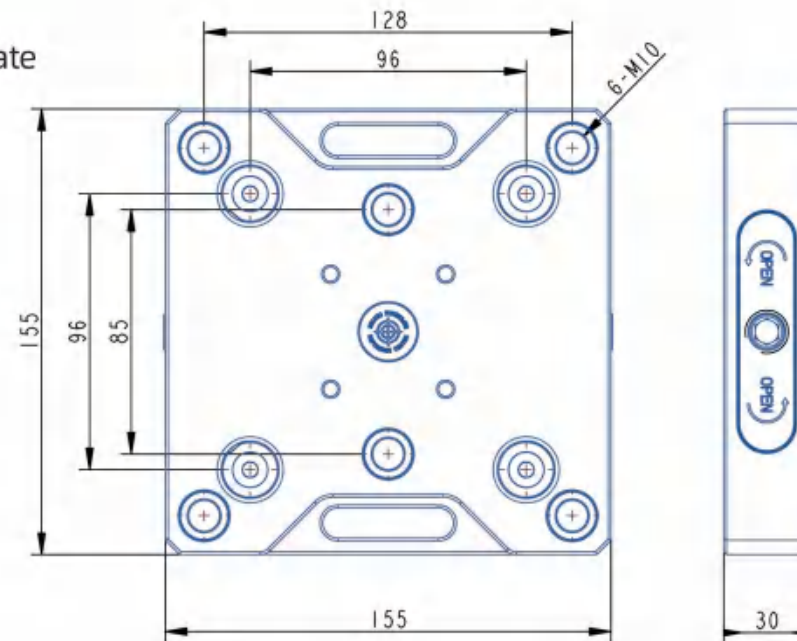


TS96-175 >>>

Rectangular zero point quick-change plate



Size: 175*155*30mm
 Material: Hardened stainless steel
 Weight: 5kg
 Bolt: 6-M10
 Locking force: 22KN

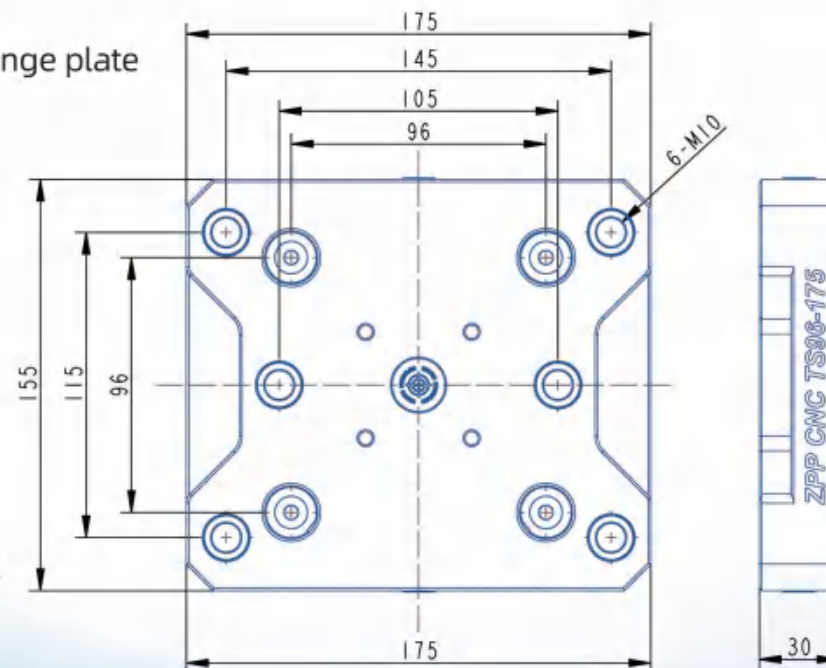

Manual Zero Point Plate


TS/TA96 Series

TS96-340 >>>

Multi-station zero point quick change plate



Size: 340*155*30mm
 Material: Hardened stainless steel
 Weight: 11.2kg
 Bolt: 4-M10
 Locking force: 22KN

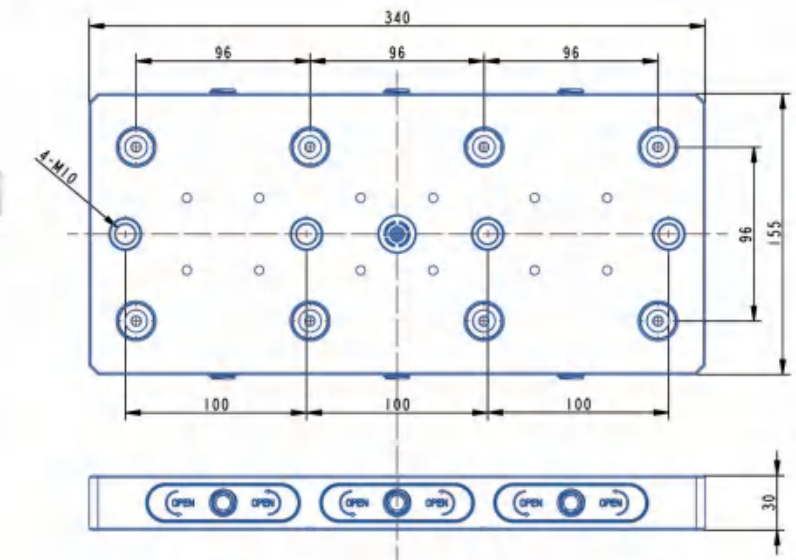


TA9652-155 >>>

Square Zero Point Quick Change Plate (Aluminum)



Size: 155*155*30mm
 Material: Hardened aluminium + Hardened steel ring
 Weight: 2.2kg
 Bolt: 4-M10
 Locking force: 18KN

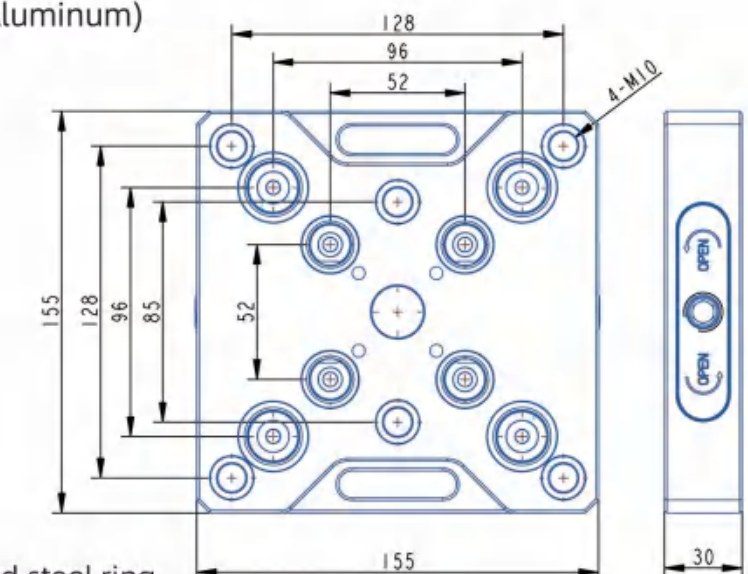

Manual Zero Point Plate


TS96 Series

TS9652-155 >>>

Compatible Zero point quick change plate



Size: 155*155*30mm
 Material: Hardened stainless steel
 Weight: 4.6kg
 Locking force: 20KN

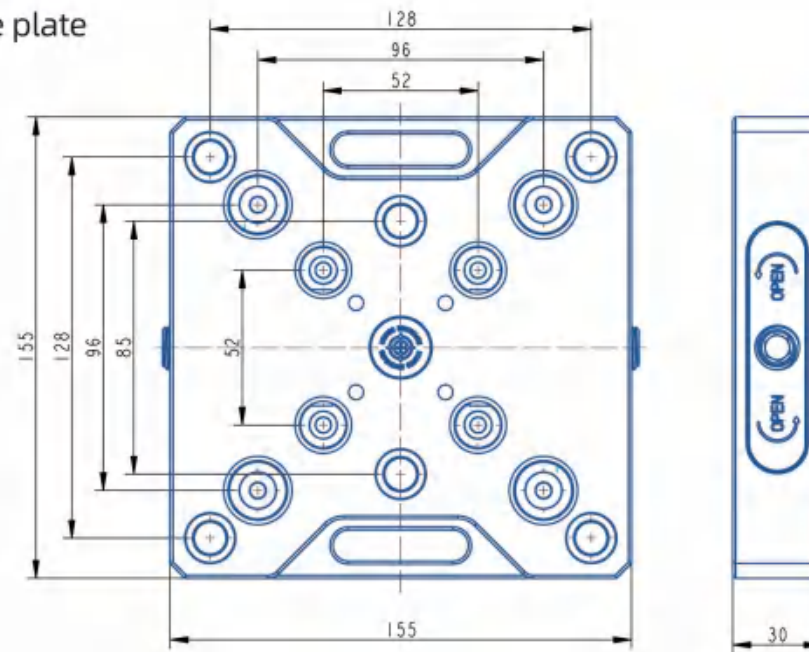


TS9652-200 >>>

Compatible Zero point quick change plate



Size: D200*30mm
 Material: Hardened stainless steel
 Weight: 6.4kg
 Locking force: 20KN

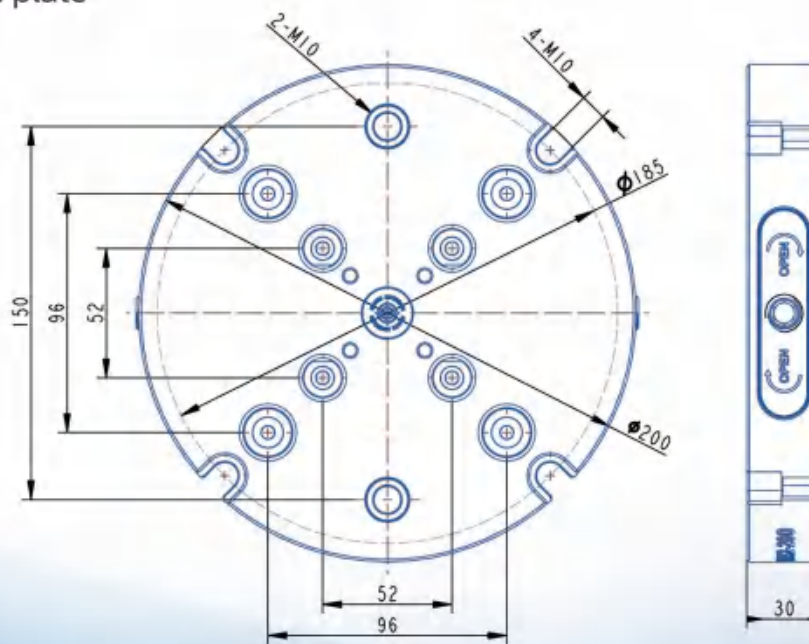

Manual Zero Point Plate


TO96 Series

TO96-200 >>>

Through hole Zero point quick change plate



Size: D200*30mm
 Material: Hardened stainless steel
 Weight: 6.2kg
 Locking force: 20KN

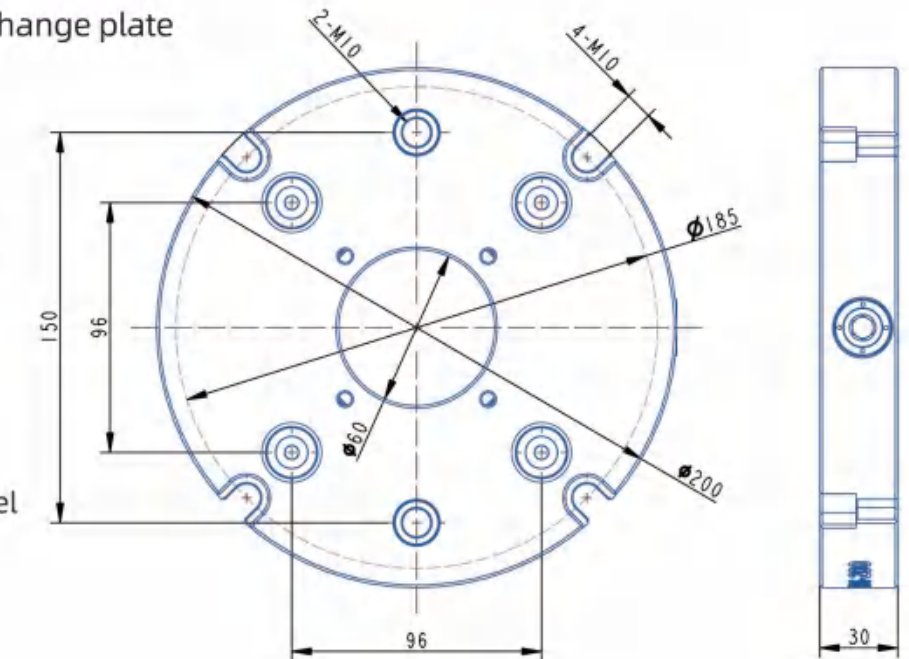


TO9652-200 >>>

Through hole compatible Zero point quick change plate




Size: D200*30mm
 Material: Hardened stainless steel
 Weight: 6.4kg
 Locking force: 20KN

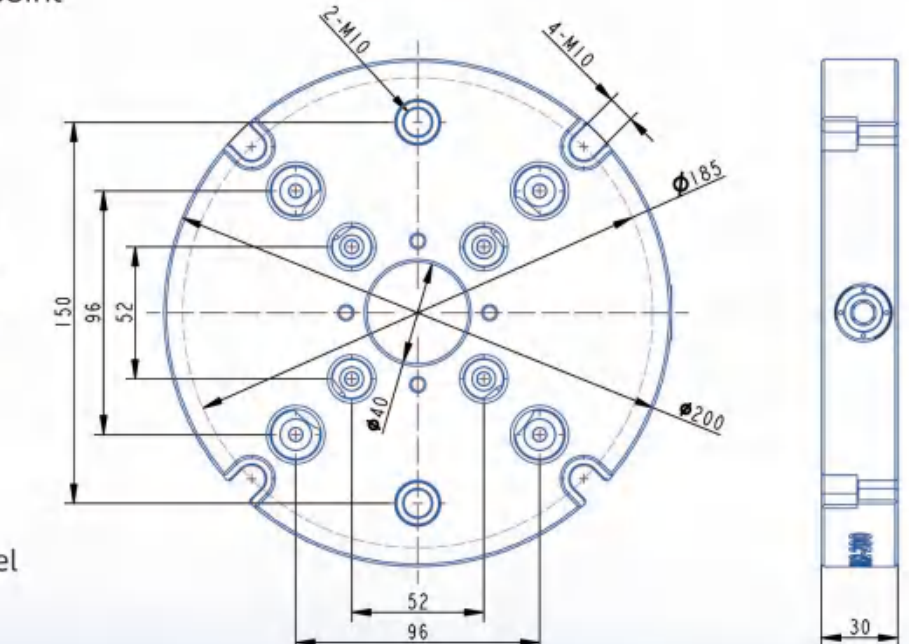

Zero Point Pyramid TS96 Series

TS96-276 >>>

Zero Point Tower (Type 96)

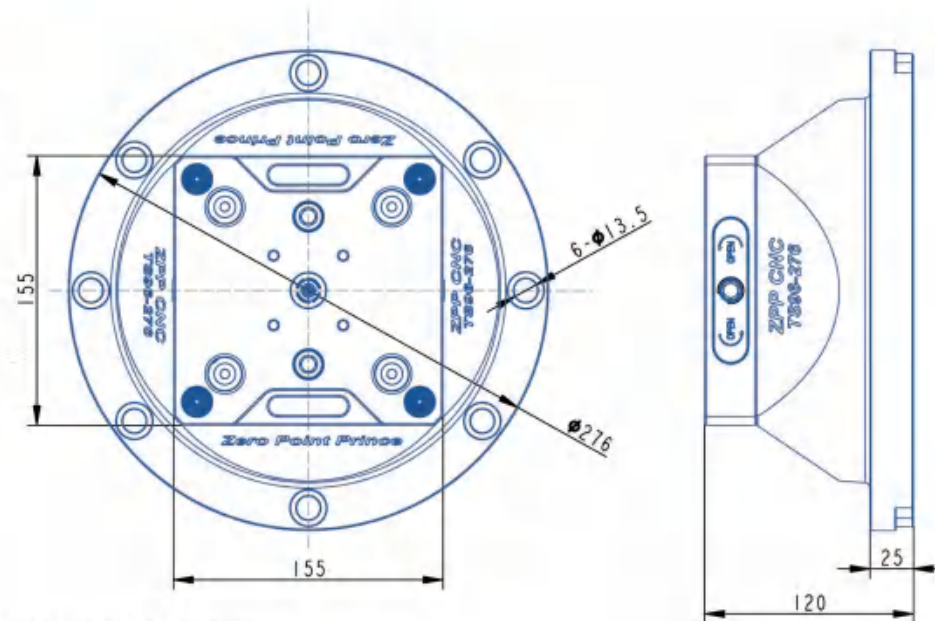

Size: D276*120mm

Material: Aluminum + hardened stainless steel


Weight: 15kg

Bolt: 6-M12

Locking force: 22KN

T096-276 >>>

Through hole Zero Point Tower (Type 96)

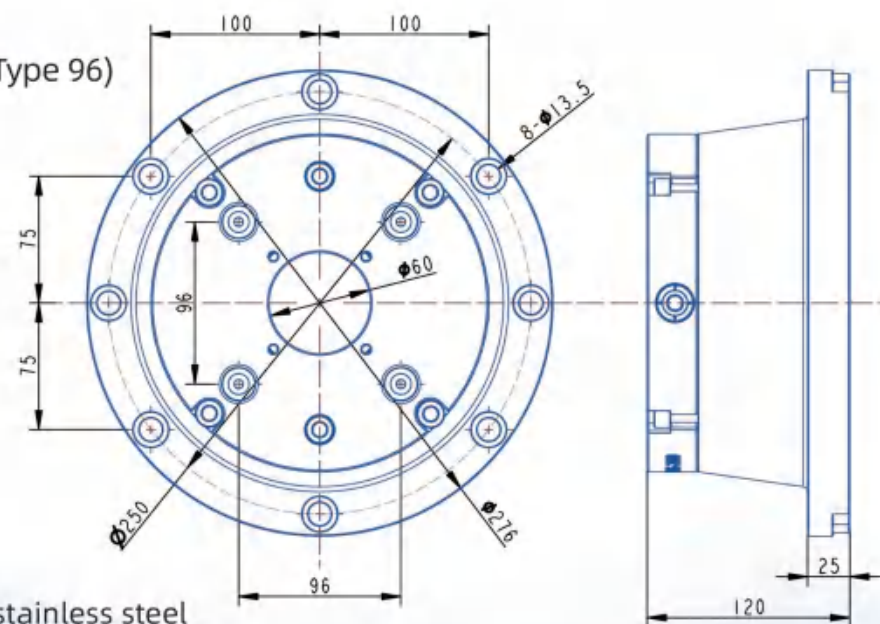

Size: D276*D60*120mm

Material: Aluminum + hardened stainless steel

Weight: 15.6kg


Bolt: 6-M12

Locking force: 20KN

Zero Point Workholding TS96 Series

TS96-9690 >>>

0-90° Zero Point Workholding (Type 96)

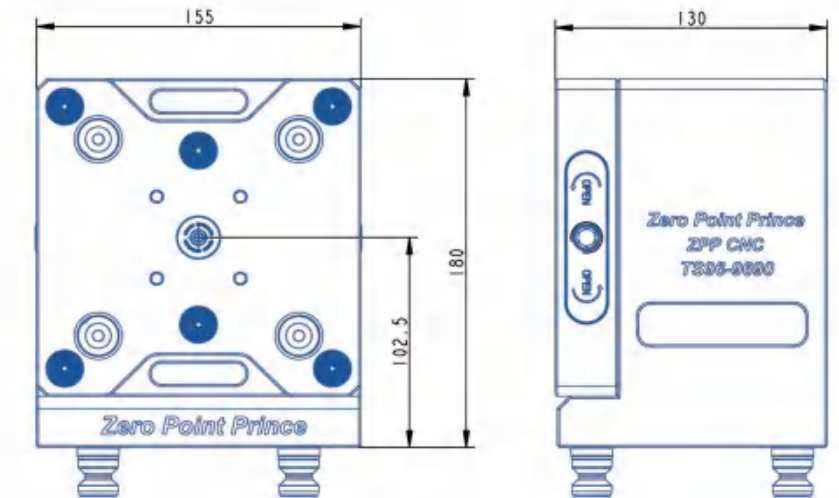

Size: 180*155*130mm

Material: Aluminum + hardened stainless steel


Weight: 12.8kg

Locking force: 22KN

Locking method: 96pull studs

TS96-0090 >>>

0-90° Zero Point Workholding (Type 96)

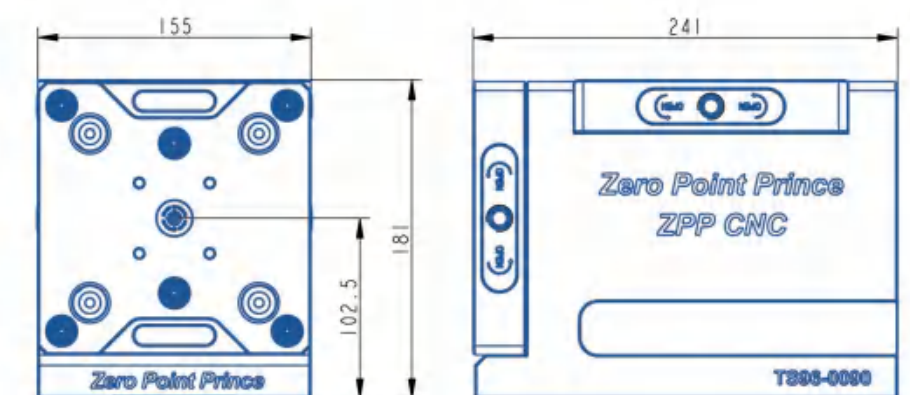

Size: 241*181*155mm

Material: Aluminum + hardened stainless steel

Weight: 24kg

Locking force: 22KN



Locking method: 96pull studs

Zero Point Holder

TS96 Series

TS96-9096 >>>

90° Zero Point Workholding (Type 96)

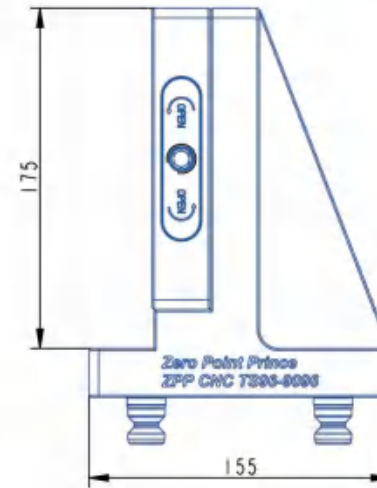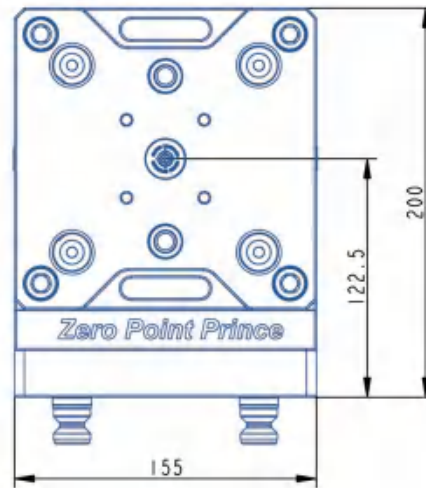

Size: 200*155*155mm

Material: Aluminum + hardened stainless steel

Weight: 9.4kg


Locking force: 22KN

Locking method: 96pull studs

Vise unilateral Positioner

DW-I Series

DW-I >>>

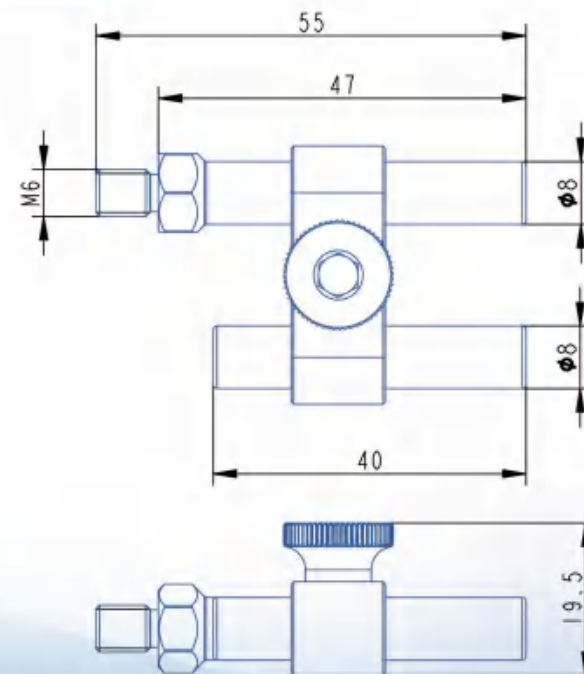

Size: 55*8mm

Material: 304 stainless steel +aluminum

Features: The positioning length and angle can be adjusted

FORCE GIANT
精密虎钳

MACHINING

The self-centering and no correction can significantly improve the machining accuracy and efficiency, ensuring that the center of the workpiece and the jaw center coincide perfectly when clamping the workpiece, thus effectively avoiding the problem of machining error and workpiece offset. The high precision makes the self-centering vise have a wide range of applications in the field of precision machining, especially in the case of extremely high machining accuracy.

MACHINE TOOL MACHINING

It is applied to different types of machining centers such as three-axis, four-axis, and five-axis, and can also be adapted to vertical, horizontal and other processing methods. It is a precision clamping tool, compact structure, can be used with a variety of modular jaws, suitable for clamping workpieces of various shapes and sizes, quick and simple installation and use, accurate positioning, wide clamping range, and improve processing efficiency.



Vise description >>>



01 45° dovetail jaws

02 Vise base

03 Drive screw

04 Locator mounting holes

05 Screw retainers

Self-centering vise

SV Series

SV10075 >>>

75 Self-Centering Vise (Economy)



Size: 100*75*62mm


Material: Hardened steel

Weight: 2.6kg

Clamping force: 14KN@60Nm


Maximum torque: 60Nm

Forward and reverse clamping: 0-46/45-80mm

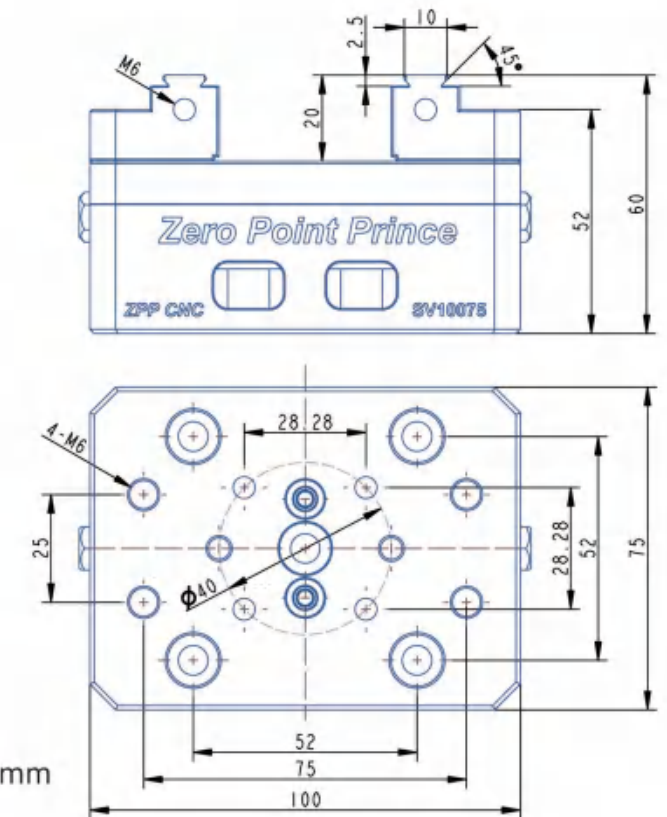

SV150100 >>>

100 Self-Centering Vise (Economy)

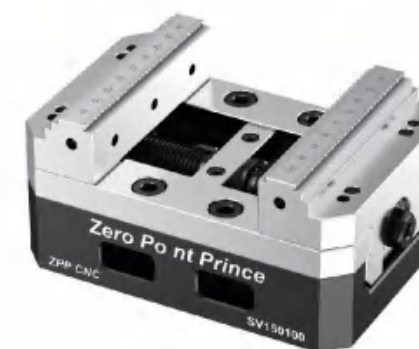

Size: 150*100*76mm


Material: Hardened steel

Weight: 5.5kg

Clamping force: 20KN@75Nm

Maximum torque: 75Nm

Forward and reverse clamping: 0-80/57-120mm

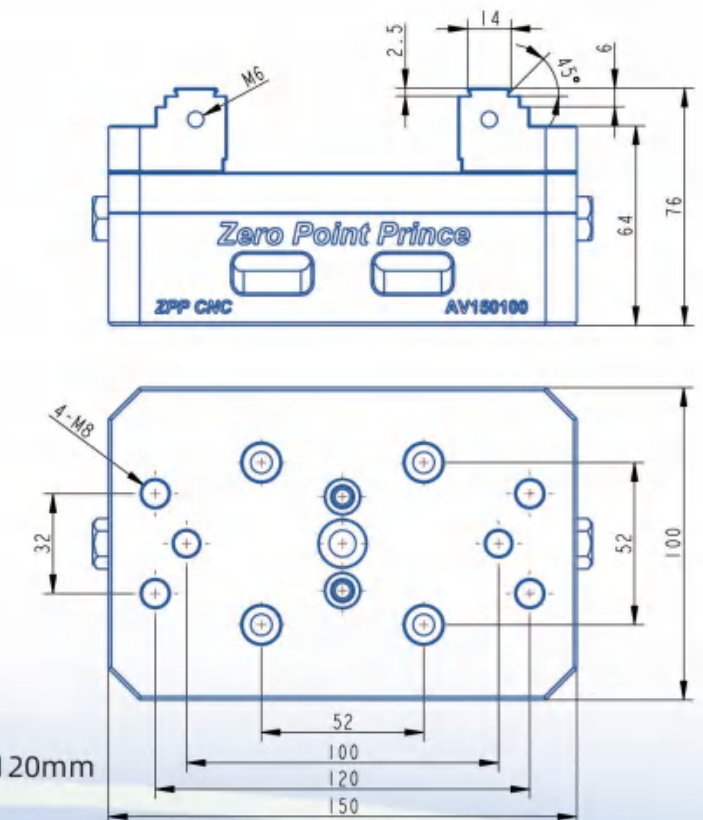

Self-centering vise

SV/CV Series

SV170130 >>>

130 Self-Centering Vise (Economy)



Size: 170*130*85mm


Material: Hardened steel

Weight: 9.3kg

Clamping force: 25KN@80Nm

Maximum torque: 80Nm

Forward and reverse clamping: 0-86/71-152mm

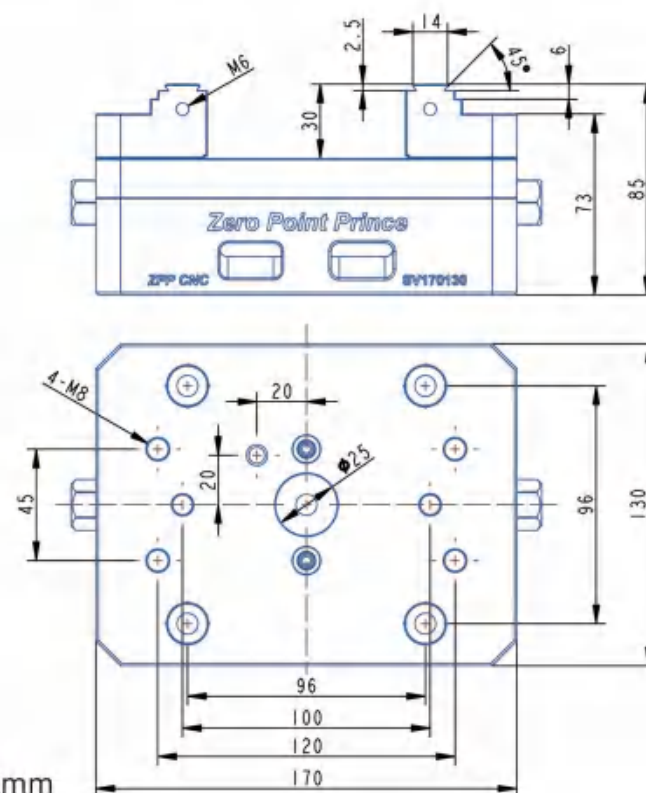

CV10075 >>>

75 self-centering vise (short)



Size: 100*75*56mm


Material: Hardened steel

Weight: 2.3kg

Clamping force: 14KN@60Nm

Maximum torque: 60Nm

Forward and reverse clamping: 0-41/41-76mm

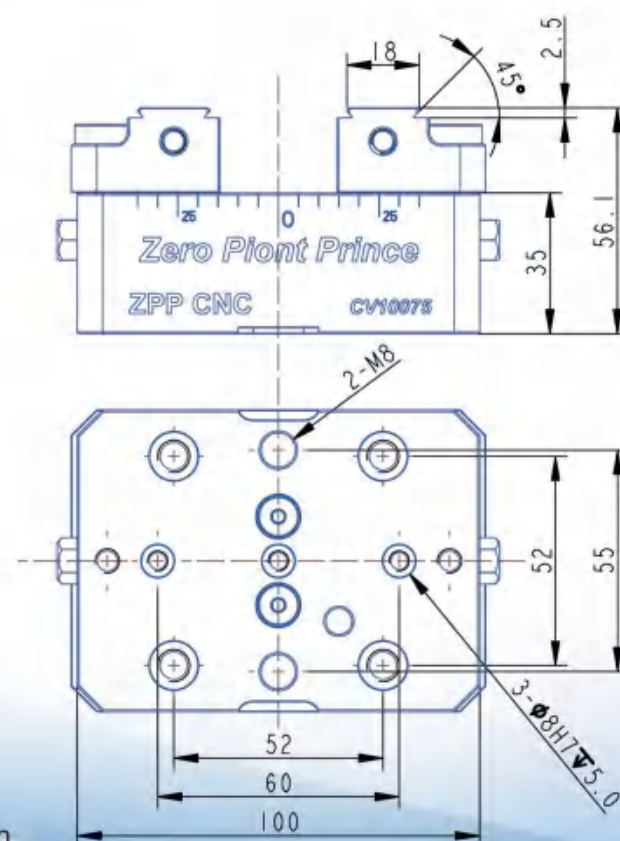

Self-centering vise

CV Series

CV15075 >>>

75 self-centering vise (long)



Size: 150*75*56mm


Material: Hardened steel

Weight: 3kg

Clamping force: 14KN@60Nm

Maximum torque: 60Nm

Forward and reverse clamping: 0-90/41-126mm

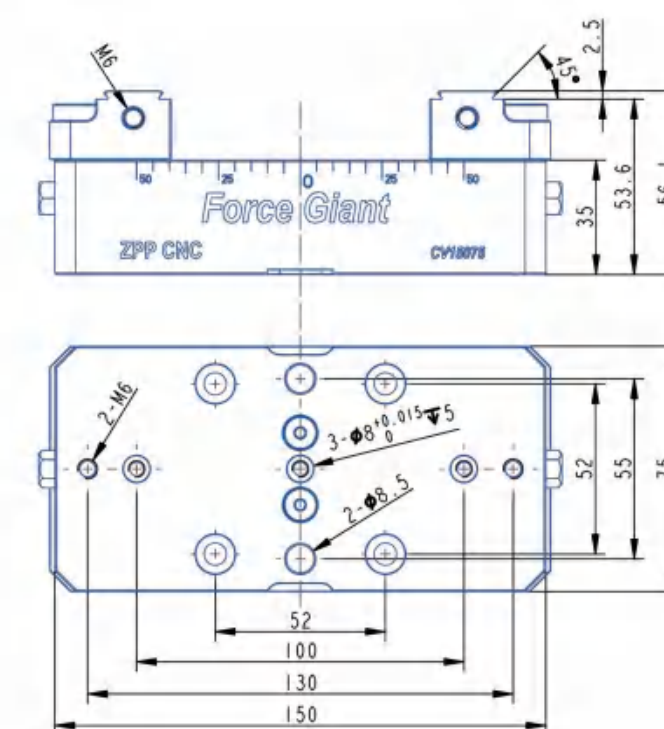

CV155125-I >>>

125 self-centering vise (short)



Size: 155*125*74.4mm


Material: Hardened steel

Weight: 7kg

Clamping force: 20KN@75Nm

Maximum torque: 75Nm

Forward and reverse clamping: 0-76/56-127mm

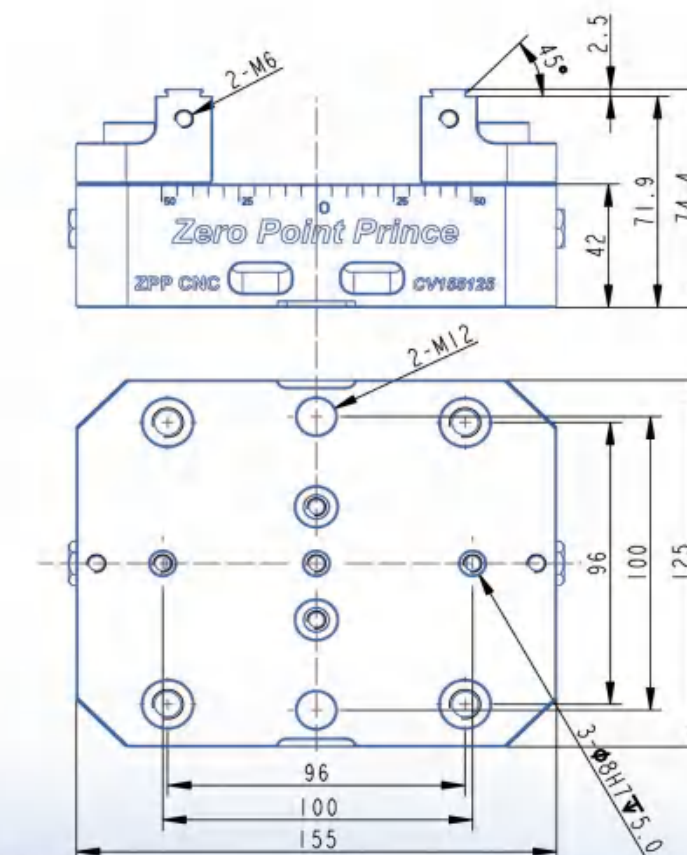

Self-centering vise


CV Series

CV155125-11 >>>

125 Self-Centering Vise (Clamping Cylinder)



Size: 155*125*74.4mm
 Material: Hardened steel
 Weight: 7kg
 Clamping force: 20KN@75Nm
 Maximum torque: 75Nm
 Forward and reverse clamping: 0-76/56-127mm

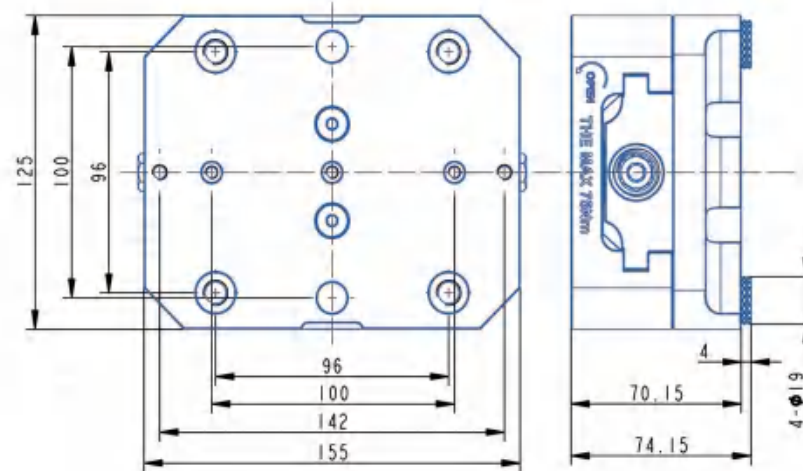


CV255125 >>>

125 self-centering vise (long)



Size: 255*125*74.4mm
 Material: Hardened steel
 Weight: 9.8kg
 Clamping force: 20KN@75Nm
 Maximum torque: 75Nm
 Forward and reverse clamping: 0-177/56-228mm

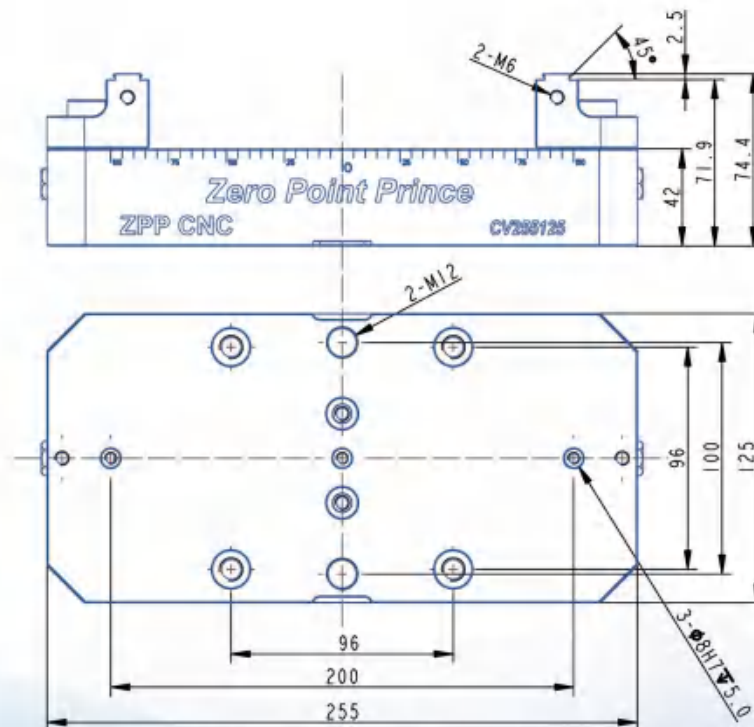

Double-station self-centering vise


TB Series

TB255125 >>>

Double-station self-centering vise (long)



Size: 255*125*74.4mm
 Material: Hardened steel
 Weight: 9.6kg
 Clamping force: 20KN@75Nm
 Maximum torque: 75Nm
 Forward and reverse clamping: 0-74/32-110mm

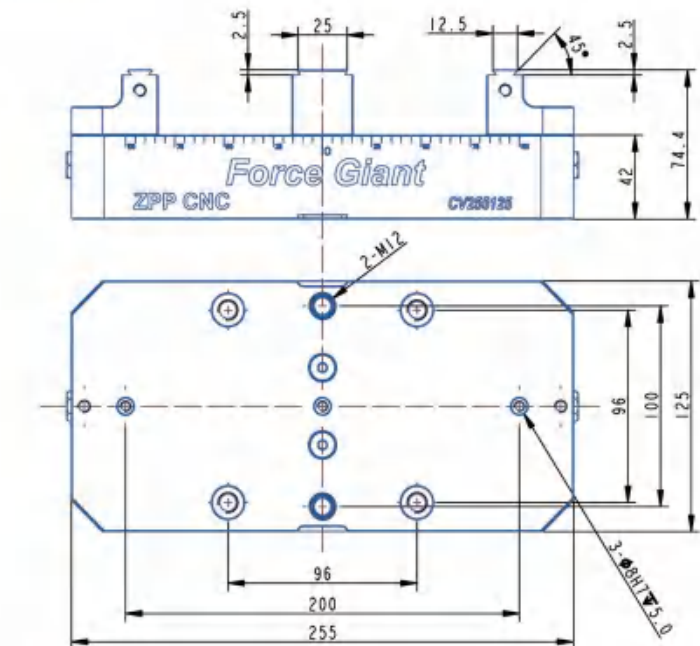

Pneumatic vise


AV Series

AV0166 >>>

Pneumatic self-centering vise



Size: 160*160*138mm
 Material: Hardened steel
 Weight: 19kg
 Clamping force: 20KN@7bar
 Maximum torque: 75Nm
 Forward and reverse clamping: 0-50/125-160mm
 Features: It is not locked by air pressure, and is self-locking

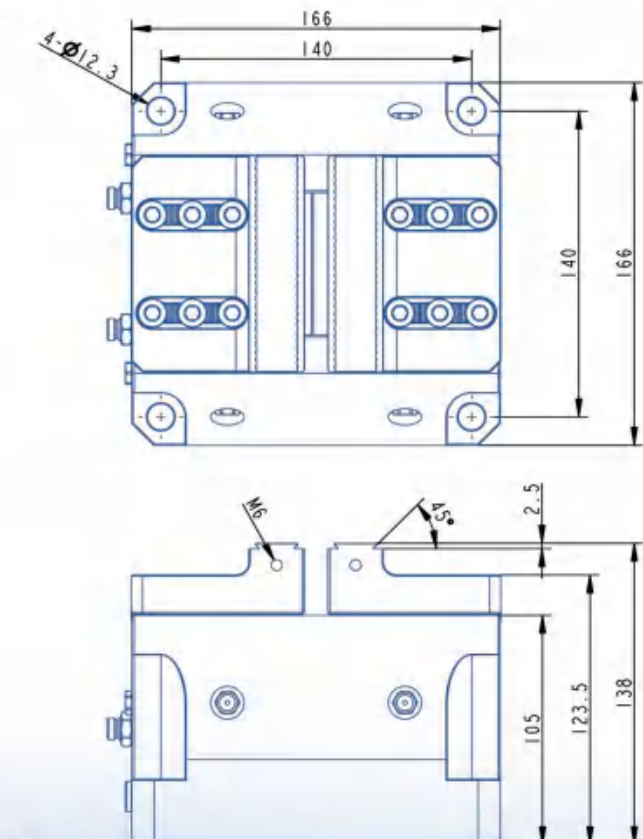

Pneumatic vise


AR Series

AR155-I >>>

Single station Pneumatic vise



Size: 155*155*126mm
 Material: Aluminum + hardened steel
 Jaw width: 130mm
 Clamping range: 130*145mm
 Clamping force: 8-10KN@6-7bar
 Weight: 9.0kg

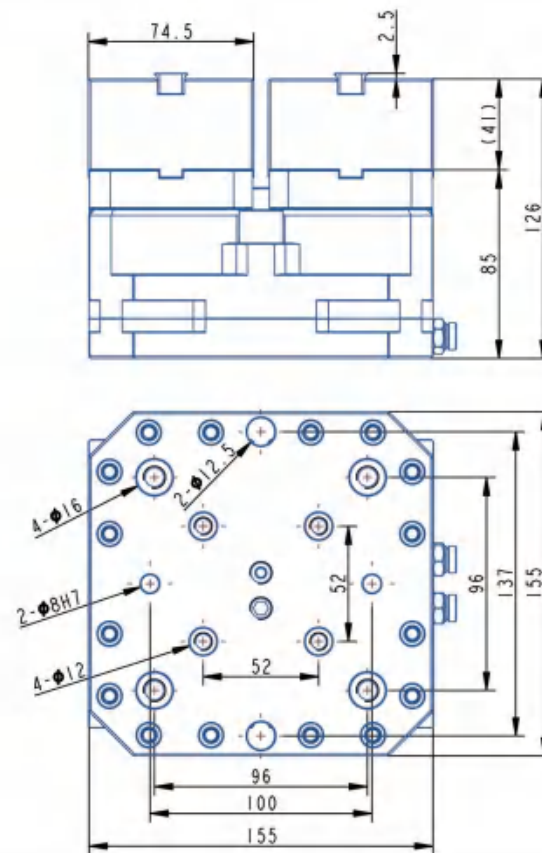


AR155-II >>>

Double station Pneumatic vise



Size: 155*155*126mm
 Material: Aluminum + hardened steel
 Jaw width: 130mm
 Clamping range: 130*65mm
 Clamping force: 8-10KN@6-7bar
 Weight: 8.5kg

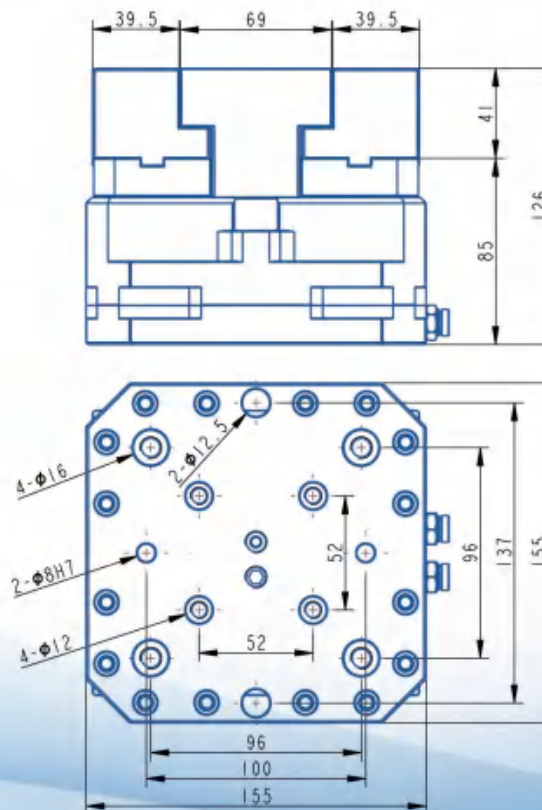

ER zero point chuck


TS52 Series

TS52-ER32 >>>

ER zero point chuck



Size: D96*84.8mm
 Material: Hardened steel
 Weight: 2.1kg
 Clamping range: 2-20mm

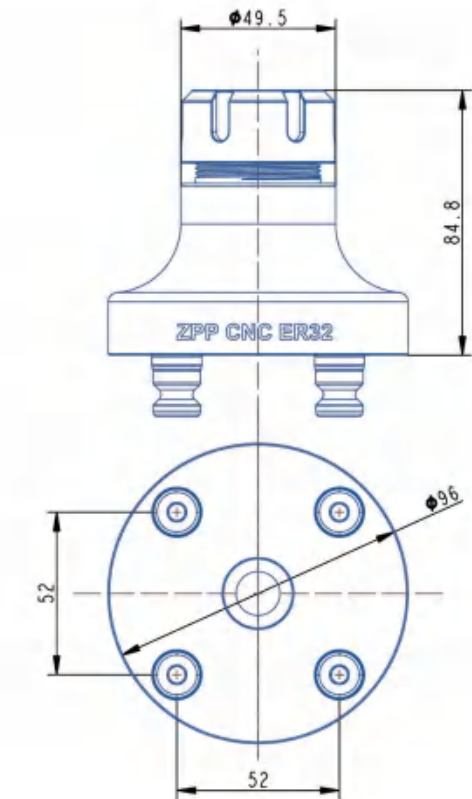


TS52-ER40 >>>

ER zero point chuck



Size: D96*83mm
 Material: Hardened steel
 Weight: 3.5kg
 Clamping range: 3-26mm

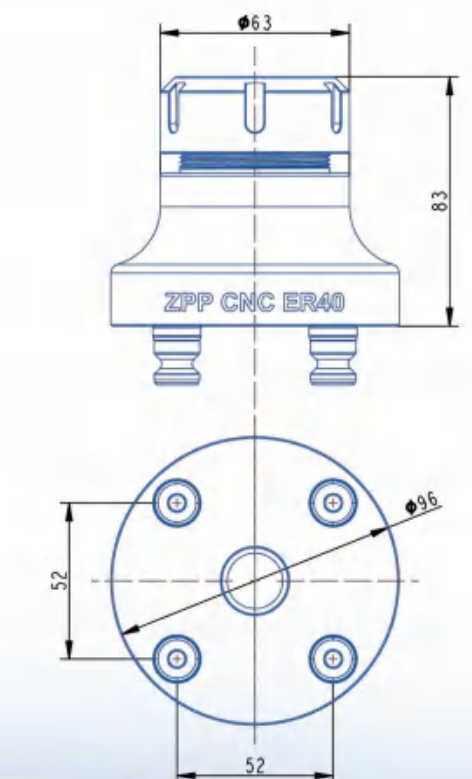


ER zero point chuck TS96 Series

TS96-ER32 >>>

ER zero point chuck



Size: 130*130*117.8mm
 Material: Hardened steel
 Weight: 5.8kg
 Clamping range: 2-20mm

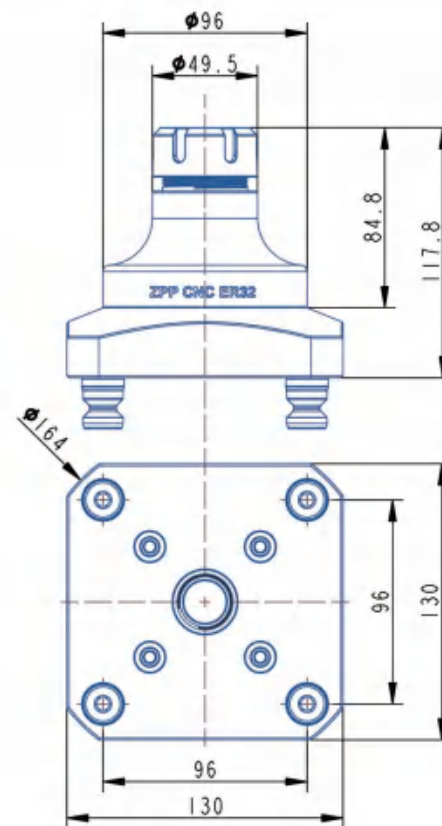


TS96-ER40 >>>

ER zero point chuck



Size: 130*130*116mm
 Material: Hardened steel
 Weight: 6kg
 Clamping range: 3-26mm

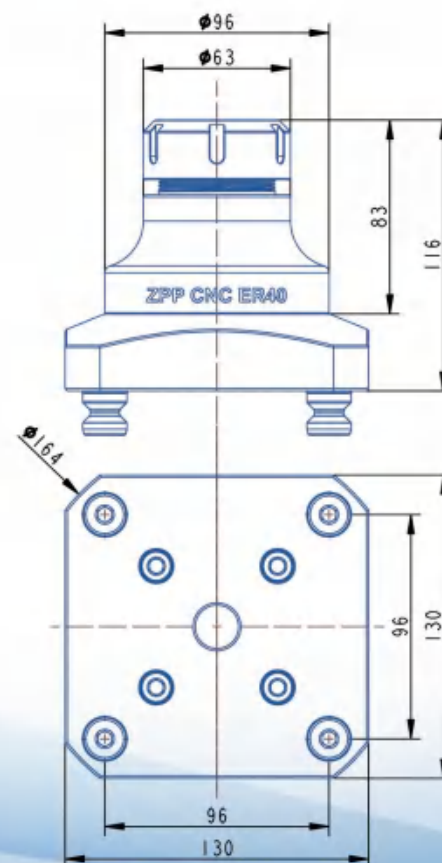


Four-axis L plate series

L170 >>>

Four-axis L-plate



Size: D170*190mm
 Material: Hardened steel
 Weight: 7.7kg
 Scope of application: Match all ZPPCNC zero plates and self-centering vises

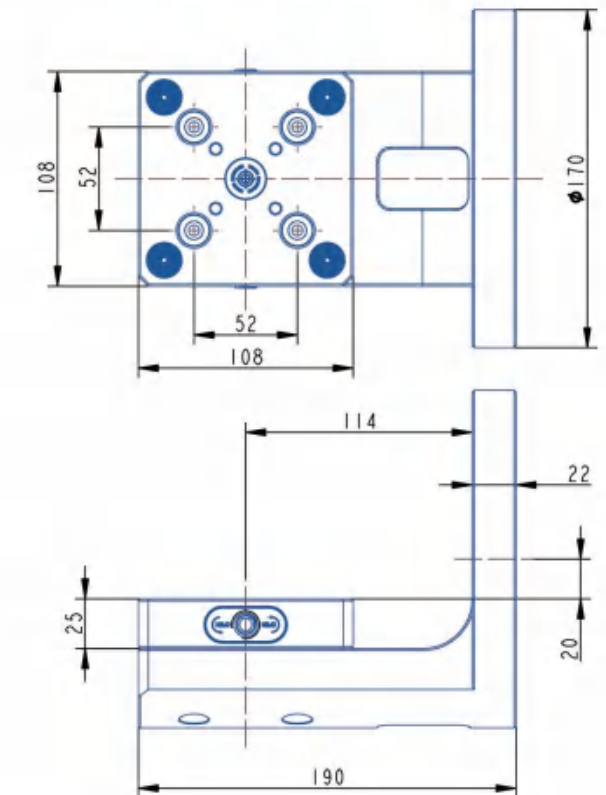


L200 >>>

Four-axis L-plate




Size: D200*225mm
 Material: Hardened steel
 Weight: 14.6kg
 Scope of application: Match all ZPPCNC zero plates and self-centering vises

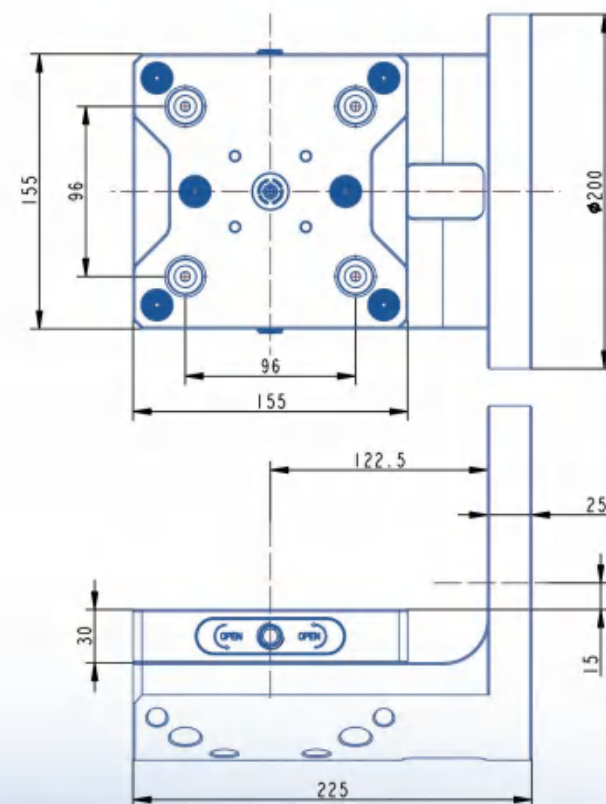


Modular Combination

52 combinations

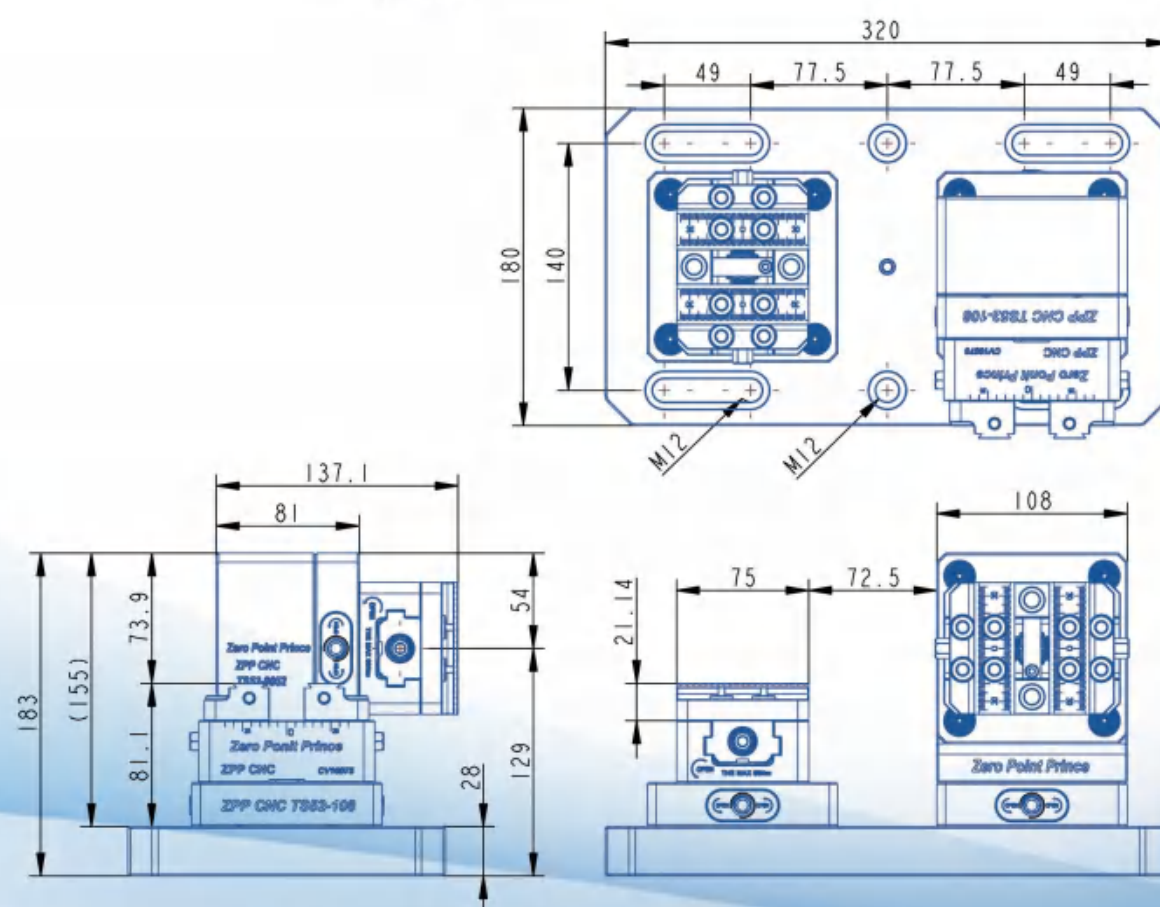

Modular Combination

96 combinations

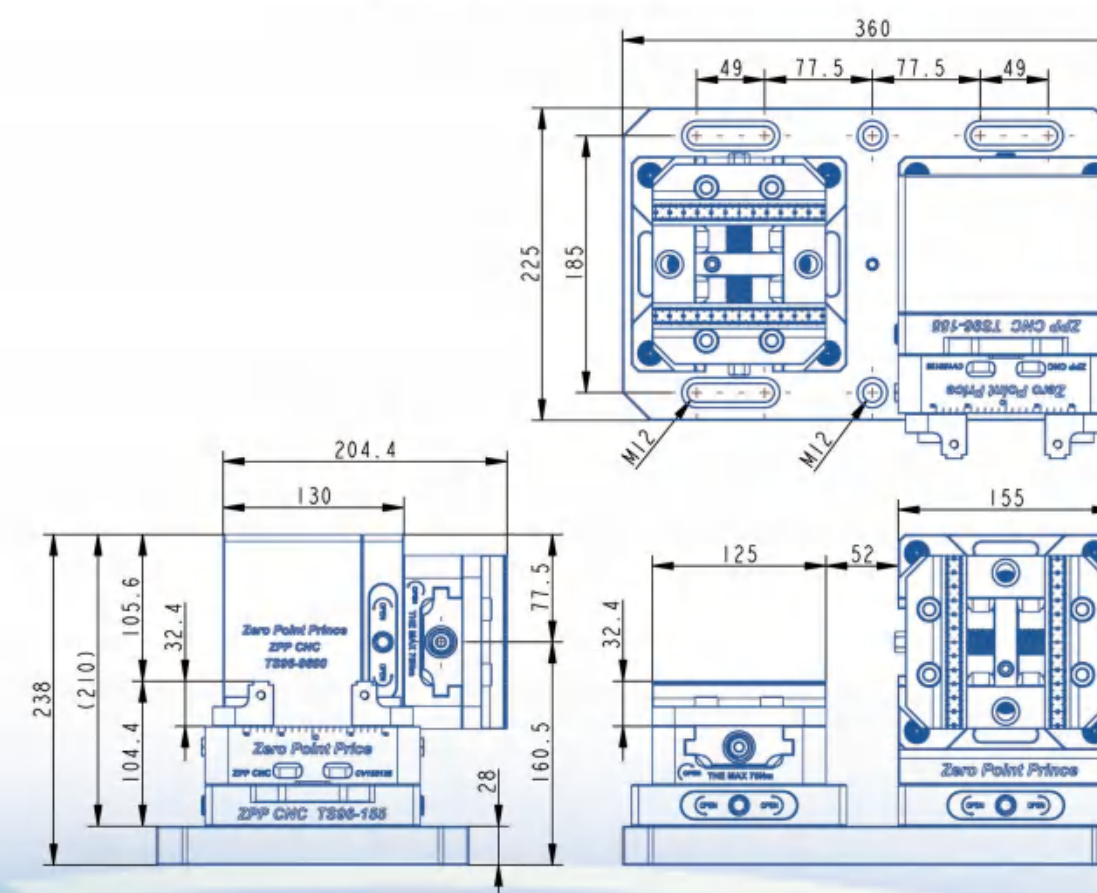

Zero Combination Three Jaws series




Type	SC96-125	SC96-160	SC96-200	SC52-80	SC52-100	SC52-130
Chuck OD(mm)	125	160	200	80	100	130
Chuck ID(mm)	30	40	65	16	22	30
Forward clamping(mm)	2.5-40	3-55	4-85	2-22	2-30	2.5-40
Reverse clamping(mm)	38-110	55-145	65-200	22-63	30-80	38-110
Internal stay(mm)	38-125	50-160	65-200	25-70	30-90	38-125
Pull studs hole distance(mm)	96x96	96x96	96x96	52x52	52x52	52x52

Run_out Tester >>>

It is very necessary to measure the runout of the tool before the machine, and the calibration of the tool can improve the appearance of the product processing and the size of the processed tool is closer to the processing requirements, and at the same time, it can avoid checking the runout of the tool on the machine tool, save the preparation time of machine tool debugging, and improve the production efficiency for small and medium-sized machining enterprises

BT30/BT40 >>>

Run_out Tester

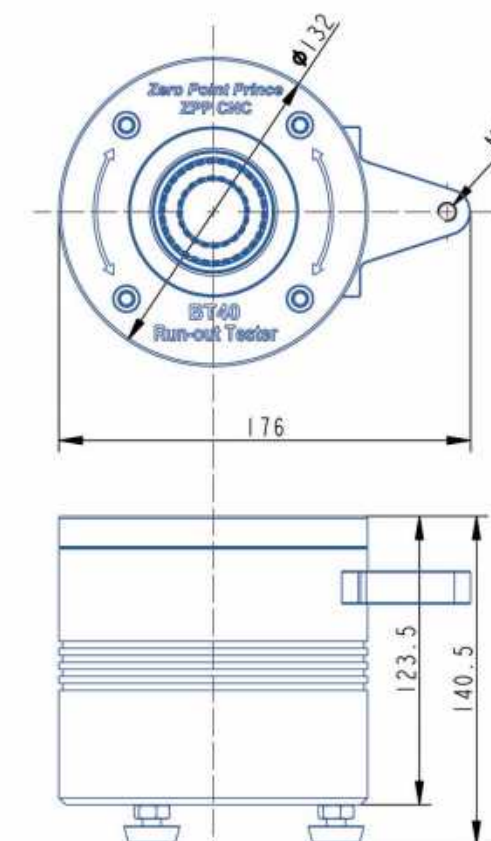

Size: D132*140.5mm

Material: Hardened steel + POM

Accuracy: 0.003/H240mm

Weight: 4.5kg

Measuring range: BT30-BT40